VIETNAM GENERAL CONFEDERATION OF LABOUR
**TON DUC THANG UNIVERSITY**
**FACULTY OF INFORMATION TECHNOLOGY**




**VŨ TẤN MINH**
**VŨ ĐÌNH KIỆT**

# DESIGN AND PERFORMANCE EVALUATION OF A MICROSERVICES SYSTEM FOR LARGE-SCALE CONCURRENT TRANSACTION PROCESSING IN A FLASH-SALE SCENARIO

## CAPSTONE PROJECT REPORT
## SOFTWARE ENGINEERING

**HO CHI MINH CITY, YEAR 2026**

VIETNAM GENERAL CONFEDERATION OF LABOUR
**TON DUC THANG UNIVERSITY**
**FACULTY OF INFORMATION TECHNOLOGY**




**VŨ TẤN MINH – 523V0012**
**VŨ ĐÌNH KIỆT – 523V0011**

# DESIGN AND PERFORMANCE EVALUATION OF A MICROSERVICES SYSTEM FOR LARGE-SCALE CONCURRENT TRANSACTION PROCESSING IN A FLASH-SALE SCENARIO

## CAPSTONE PROJECT REPORT
## SOFTWARE ENGINEERING

Advised by

**Mr. MAI VĂN MẠNH**

**HO CHI MINH CITY, YEAR 2026**

# Contents


**1 Introduction** **7**
- 1.1 Problem Statement . . . 7
- 1.2 Objectives . . . 7

**2 Scope and Limitations** **9**
- 2.1 Scope . . . 9
- 2.2 Limitations . . . 9

**3 Background** **11**
- 3.1 Flash-sale contention on one inventory record . . . 11
- 3.2 Asynchronous messaging . . . 12
- 3.3 Transactional Outbox and idempotent consumers . . . 12
- 3.4 Overload control . . . 13
- 3.5 Generating load: open and closed models . . . 13
- 3.6 The configurations C0 to C4 . . . 13

**4 System Requirements** **15**
- 4.1 Functional Requirements . . . 15
- 4.2 Non-Functional Requirements . . . 16

**5 Technology Selection** **18**

**6 Development Environment** **20**
- 6.1 Local infrastructure (Docker Compose) . . . 20
- 6.2 Toolchain . . . 20

**7 System Analysis and Design** **23**
- 7.1 Entity-Relationship Diagram . . . 23
- 7.2 Class Diagram . . . 26
- 7.3 API Contract . . . 28
- 7.4 Event Contract . . . 29
- 7.5 Order State Machine . . . 29
- 7.6 Sequence Diagrams . . . 30

7.7 Idempotency, Ordering and Ownership . . . 31
7.8 Design Rationale . . . 34
7.9 Supported Failure Model . . . 35

**8 Implementation** **38**
8.1 Baseline Configurations: C0 and C1 . . . 38
8.1.1 Reset and seed . . . 38
8.1.2 C0 – the naive baseline (a controlled failure demonstration) 38
8.1.3 C1 – the PostgreSQL atomic update . . . 39
8.1.4 Correctness criteria . . . 40
8.1.5 JMeter smoke test . . . 41
8.2 Order Service . . . 41
8.2.1 API design . . . 42
8.2.2 Idempotency strategy . . . 42
8.2.3 State management . . . 43
8.2.4 Test cases . . . 44
8.2.5 Event Publication Reliability: the dual-write problem and the Transactional Outbox . . . 44
8.3 Inventory Service . . . 48
8.3.1 Scaffolding . . . 48
8.3.2 Redis key and data design . . . 48
8.3.3 Lua reservation logic . . . 48
8.3.4 Inventory warm-up and readiness . . . 49
8.3.5 Inventory invariants under concurrency . . . 49
8.3.6 OrderPlaced handling and the Redis/PostgreSQL boundary . 50
8.4 Stock Results and Order State . . . 51
8.4.1 Inventory Service's own Outbox – a harder dual-write problem 51
8.4.2 Order Service: consuming the result . . . 52
8.4.3 Automated correctness validation . . . 52
8.4.4 The main workflow . . . 54
8.5 Reliability and Idempotency . . . 54
8.5.1 Message delivery semantics . . . 54
8.5.2 Idempotent consumer . . . 56
8.5.3 Acknowledgement strategy, proven with a real crash . . . 57
8.5.4 Duplicate handling . . . 59
8.5.5 Concurrent duplicates and out-of-order completion . . . 60
8.6 Failure Handling and Recovery . . . 61
8.6.1 Classify, then retry a bounded number of times . . . 62
8.6.2 A dead-letter queue per service, and replay . . . 63
8.6.3 Reconciliation: stuck orders, a bound and an alert . . . 64

8.6.4 Supported and unsupported failure modes . . . . . 66
8.7 Process Worker and Observability . . . . . 68
8.7.1 The Process Worker, and what it settled about the state machine . . . . . 68
8.7.2 Correlation IDs across three services . . . . . 70
8.7.3 Structured logging and metrics . . . . . 71
8.8 Load Shedding . . . . . 76
8.9 Deployment on AWS EC2 . . . . . 80

**9 Experimental Design** **82**
9.1 Pilot and calibration . . . . . 82
9.2 Values locked for the official runs . . . . . 82
9.3 Workload profiles . . . . . 83
9.4 Capacity and the 2,000/s target . . . . . 84

**10 Results** **85**
10.1 Measurement Method . . . . . 85
10.2 Official Runs . . . . . 86
10.3 Correctness by Configuration . . . . . 87
10.4 Latency by Configuration . . . . . 87
10.5 Throughput, Rejection and Errors . . . . . 89
10.6 Overload, Backlog and Recovery . . . . . 90
10.7 Consumer Replicas on One Host . . . . . 93
10.8 Resource Use . . . . . 96
10.9 Supplementary Runs . . . . . 96

**11 Discussion** **100**
11.1 Correctness under concurrency . . . . . 100
11.2 C1 against C2: what the asynchronous design buys and costs . . . . 101
11.3 Why C1 wins on this host, and when the asynchronous design would 102
11.4 Overload control . . . . . 103
11.5 Consumer replicas on one host . . . . . 104
11.6 The 2,000 attempts per second target . . . . . 104
11.7 Threats to validity . . . . . 104

**12 Conclusion** **106**

**References** **107**

**A Test Plan Summary** **110**

**B Implementation Verification Detail** **111**

B.1 Verification Summary . . . . . 111
B.2 The main workflow: evidence . . . . . 111
B.3 Process Worker and observability: verification . . . . . 114
B.4 Overload, drain and recovery before the pilot . . . . . 118

**C Pilot and Calibration on EC2** **122**
C.1 Pilot on EC2 . . . . . 122
C.2 Why C3 and C4 drained slowly, and the fix . . . . . 124
C.3 EC2 confirmation of the fix . . . . . 125
C.4 Pilot results . . . . . 125
C.5 Supplementary runs: host comparison . . . . . 127

**D External Review** **128**

**E Additional Result Figures** **131**

**F Freeze Manifest** **133**

**G Run Commands** **134**

**H Evidence Index** **136**

# 1 Introduction

Flash-sale workloads send a short burst of concurrent orders toward a small amount of inventory. A backend must preserve stock correctness while processing requests quickly, and must control work when the incoming rate exceeds available capacity.

This project compares a synchronous PostgreSQL inventory baseline with an asynchronous design using RabbitMQ and an atomic Redis Lua reservation. It evaluates correctness, request and completion latency, throughput, overload response, and the effect of running multiple consumers on one host. The research question, boundaries, and experiment controls are recorded in `docs/00-scope-lock.md` and `docs/experiment-protocol.md`.

## 1.1 Problem Statement

With finite stock, a read-check-write sequence can let concurrent requests reserve the same remaining unit. A conditional atomic update can prevent that race, but contention may affect latency and throughput. In an asynchronous design, separate services also have to handle partial failures, redelivered messages, and traffic above capacity without losing track of accepted orders.

This project asks how C0 (a deliberately unsafe demonstration), C1 (synchronous PostgreSQL atomic update), and C2 (RabbitMQ with Redis Lua reservation) behave under matched workloads. C3 adds load shedding; C4 compares 1, 2, and 4 Inventory Service replicas on the same EC2 host. C0 is only a race-condition demonstration; C1 is the correctness and performance baseline. The study measures the trade-offs rather than assuming that a relational database or a microservices architecture is inherently faster or safer.

## 1.2 Objectives

1. Compare C0 and C1 with the asynchronous C2 design under equivalent conditions; evaluate C3 overload controls and C4 same-host replica counts.

2. Check the inventory rules in `docs/inventory-invariants.md`, including no negative stock, no oversell, one reservation per order, and no duplicate side effects on redelivery.

3. Measure request acceptance and end-to-end completion separately, alongside latency percentiles, throughput, rejection, queue, resource, retry, and DLQ measures.

4. Determine whether accepted orders reach a terminal state or are surfaced by reconciliation, and limit conclusions to the tested hardware, workloads, and failure scenarios.

# 2

# Scope and Limitations

## 2.1 Scope

See `docs/00-scope-lock.md` for the research question and scope. The system includes Order Service, Inventory Service, a deterministic Process Worker, PostgreSQL schemas owned by each service, Redis Lua stock reservation, RabbitMQ, and the Nginx, application and queue load-shedding controls of C3. The backend target is one AWS EC2 host; JMeter runs on a separate machine. C4 varies Inventory Service replicas as 1, 2, and 4 processes or containers on that same host.

The study excludes a frontend, authentication and authorization, real payment processing, payment-failure compensation, multi-node scaling, clusters, and multi-region deployment. It does not claim that one-host replication represents multi-node horizontal scaling.

## 2.2 Limitations

The results have the following limits:

- PostgreSQL, Redis, and RabbitMQ each run as a single instance. The project does not evaluate cluster failover, infrastructure node loss, or multi-region network effects.
- The Process Worker uses a deterministic delay and successful result; the study does not characterize real downstream failure rates or compensation.
- Replica experiments use processes or containers on one EC2 host. Shared CPU, memory, and I/O contention limit how far their results can be generalized.
- Load-shedding thresholds and the reservation-attempt target are specific to the recorded hardware and workload; they are not universal capacity guarantees.
- Authentication and authorization are out of scope. The order-status API therefore must not be presented as production-secure, and a GUID is not a substitute for an authorization check.

- The backend is one `m7i-flex.large` host with two vCPUs, shared by every service, the broker, Redis and the database. The official runs reached about 200 accepted requests and 50–66 completed orders a second, far below the brief's initial target of about 2,000 reservation attempts a second; the results describe this host, not the design's ceiling (Section 9.4).
- The official matrix is steady load on one hot product with more stock than any run can sell. Scarce stock and the other load profiles were tested separately and at lower rates (TP-B02, TP-I02, TP-X04), and scarce stock again under load in the supplementary session (2,000 units at 200/s, Section 10.9), on another host pair.
- Contention level was not varied in the official matrix: `run-matrix.ps1` takes one `-Product`, so every official run targets one hot product. The supplementary sell-out does not change this: it also uses one product.
- The load-shedding limits were not calibrated to the measured capacity. The gateway admits 200 requests/s and the admission control holds the Outbox near 2,000 rows, while the pipeline keeps up only at about 50 orders/s. At 100/s and above C3 and C4 therefore still accept faster than they complete, and accepted orders wait 57–64 s at p95 to complete: the limits bound the backlog, not the wait.
- A stock decision of `REJECTED` is not recorded in Redis, so a redelivered message for a rejected order runs the reservation script again. This is harmless (it rejects again), but it is work an Inbox would skip.
- The set of processed order IDs per product (`processed:{product}`) grows without bound; a long-running sale would need an expiry or a cleanup.
- Each cell ran three times for 60 s, all in one session on one pair of hosts. Rare behaviour, such as how often a run dead-letters an order, is shown to occur but not measured as a frequency.
- The load generator keeps one waiting thread per request in flight, so a slow backend lowers the offered rate; the results report the rate achieved. The AMI is resolved at apply time and not pinned.
- The README reproduction (TP-X03) ran on the same PC that built the project, from a fresh clone of the published repository in a new folder, with every image pulled again, the service images rebuilt without cache and new volumes. It shows the instructions and the published code are complete; it does not show that they work on a different machine or operating system.

# 3 Background

This chapter summarises the established ideas the design builds on and names the source of each one. The later chapters describe how this project applies them.

## 3.1 Flash-sale contention on one inventory record

In a flash sale most requests target one product, so they all read and write the same stock value. If a request reads the stock, checks it in application code and then writes a new value, two concurrent requests can both read the same remaining unit and both succeed. Kleppmann calls this the *lost update* problem and lists the usual remedies: an atomic write operation, explicit locking, or detecting the conflict and retrying [11]. C0 deliberately reproduces the race (Section 8.1).

PostgreSQL offers two of those remedies. A conditional `UPDATE`, which subtracts one only `WHERE stock >= 1`, takes a row-level lock on the row it changes, and a second writer to the same row waits until the first transaction ends [15]. Under the default Read Committed level the waiting writer then re-evaluates its `WHERE` condition against the newly committed row version, so it cannot take a unit that is no longer there [14]. `SELECT ... FOR UPDATE` locks the row before the check instead [16]. Both are correct, but every request for the hot product queues on the same row lock, so the row becomes a serialisation point whose cost grows with contention. This is the C1 baseline, and the reason the brief asks for it to be measured rather than assumed slow.

Redis can perform the check and the decrement inside the server. A Lua script sent with `EVAL` (or loaded once and called by its hash) runs atomically: while it runs, no other script or command is served [22, 21]. A script that checks an idempotency key, checks the available stock, decrements it and records the result therefore has no window in which another request can interleave. The price is that the script blocks the server while it runs, so it must stay short. Redis also keeps the data in memory, so the durable record of each order still has to live in the relational database.

## 3.2 Asynchronous messaging

Message brokers decouple the service that accepts a request from the services that process it. Hohpe and Woolf describe the patterns of this style, including channels, routing and error handling [8]. Richardson applies them to microservices, where each service owns its data and services exchange events instead of sharing tables [23]. Accepting work is then limited by how fast the first service can store it, not by how fast the slowest step can finish it, so the client receives an order id early and polls for the outcome.

RabbitMQ gives two delivery guarantees that this design relies on. A consumer *acknowledges* a message only after it has processed it, and the broker redelivers an unacknowledged message if the consumer's channel closes. With *publisher confirms* the broker tells the publisher when it has taken responsibility for a message [17]. Together they give at-least-once delivery: a message is not lost, but it can arrive more than once. A message that cannot be processed can be *dead-lettered*, for example when a consumer rejects it without requeueing, and routed to a separate exchange [18]. This is the Dead Letter Channel pattern [9]: a poison message is moved aside instead of blocking the queue. The .NET client used here exposes these operations directly [20].

## 3.3 Transactional Outbox and idempotent consumers

A service that writes to its database and then publishes to a broker faces a dual-write problem: if it fails between the two steps, either the order exists without its event or the event refers to an order that was never stored. The *Transactional Outbox* pattern removes the second write from the request path. The service inserts the event into an outbox table in the same local transaction as the business change, and a separate relay publishes the stored events to the broker [25, 23]. The event is published at least once, provided the relay retries until the broker confirms.

At-least-once delivery means every consumer must tolerate duplicates. An *Idempotent Consumer* records the id of each message it has processed and ignores a message whose id it has already seen [24]. Hohpe and Woolf describe the same idea as the Idempotent Receiver [10]. When the record of the message id and the business change commit in one transaction, a redelivery after a crash cannot apply the change twice. In this project the processed-message table is called the Inbox; Sections 8.2.5 and 8.5 describe both sides.

## 3.4 Overload control

When requests arrive faster than a system can serve them, queues grow, every request waits longer and the system can fail as a whole. The Google SRE book argues that a service should refuse excess work, that refusing a request should cost far less than serving it, and that clients should limit how often they retry a refused request [6]. This project applies that advice in three layers. Nginx limits the request rate with its `limit_req` module, which uses the leaky bucket method, allows a configurable burst and answers excess requests with a configurable status code [13]. The application limits how many new orders it handles at once. RabbitMQ bounds the length of each main queue, and with the `reject-publish` overflow behaviour a publish to a full queue is refused and, with publisher confirms, reported to the publisher instead of growing the queue [19].

Overload shows first in the slowest requests, not the average. Dean and Barroso show that rare slow responses dominate the user experience of large services, and that the tail of the latency distribution needs separate attention [5]. The results therefore report p50, p95 and p99 latencies and the variation between runs, as the brief asks.

## 3.5 Generating load: open and closed models

A load generator can work in a *closed* loop, where each simulated user sends its next request only after the previous one has finished, or an *open* loop, where requests arrive at a set rate whatever the system's response time. Schroeder, Wierman and Harchol-Balter show that the two models can behave very differently under the same load, and that the choice must match the system being modelled [26]. A closed loop slows down as the system slows down, which hides overload. Flash-sale buyers do not wait for each other, so the official runs use JMeter in an open-loop mode that targets an arrival rate [4] and report the rate actually achieved (Section 9.2).

## 3.6 The configurations C0 to C4

The brief defines five configurations, each adding one idea from this chapter to the previous one:

**C0, naive**
: Read, check and write in separate statements with no concurrency control. It exists only to show the lost-update race of Section 3.1; it is not a baseline.

### C1, PostgreSQL atomic baseline

One synchronous request performs a conditional atomic `UPDATE`. It must never oversell and is the baseline for every comparison.

### C2, Redis event-driven

Order Service stores the order and its event through the Outbox, RabbitMQ carries the event, and Inventory Service reserves stock with the atomic Lua script. Consumers are idempotent, with bounded retries and dead-letter queues (Sections 3.2 and 3.3).

### C3, load shedding

C2 plus the three overload layers of Section 3.4.

### C4, consumer replication

C3 with 1, 2 and 4 Inventory Service consumers on the same host. Because all replicas share one machine, C4 measures consumer replication and contention for that machine's resources, not multi-node scaling.

The supporting tools are cited where they are introduced: ABP on .NET 10 [1, 12], Terraform [7], the EC2 M7i-flex instance family [2] and AWS Systems Manager Run Command [3].

# 4 System Requirements

Requirements below follow the teacher brief (`docs/teacher-brief.md`, §4) item by item. They state what the system must do; whether each is implemented and verified is reported in the chapter for the week that builds it, not assumed here.

## 4.1 Functional Requirements

1. **FR-1 Order intake.** Accept and persist an order for one product and return its order ID as soon as the request is accepted, in state `PendingStock`, without waiting for inventory.
2. **FR-2 Status polling.** Let the client poll an order's current state until it reaches a terminal state or times out.
3. **FR-3 Atomic reservation.** Check and reserve inventory atomically (Redis Lua in C2–C4; conditional atomic update in PostgreSQL for C1), so concurrent requests can never reserve more than the available stock.
4. **FR-4 Status from reservation result.** Move the order to `Confirmed` or `Rejected` from the `StockReserved` or `StockRejected` event.
5. **FR-5 Downstream processing.** A Process Worker consumes `StockReserved`, simulates downstream work with a deterministic delay and a successful result, and uses the order ID as its idempotency key.
6. **FR-6 Messaging.** Publish and consume events through RabbitMQ, with publisher confirms.
7. **FR-7 Transactional Outbox.** Every producer writes its business change and its outgoing event in one local transaction; a publisher retries until the broker confirms.
8. **FR-8 Inbox.** Every consumer records each message ID under a unique constraint, in the same transaction as its business change, so a redelivered message has no second effect.

9. **FR-9 Retry and DLQ.** Retry transient failures a bounded number of times; move poison or exhausted messages to a dead-letter queue.
10. **FR-10 Reconciliation.** A periodic job finds orders stuck in a non-terminal state too long. It is a safety net, not a replacement for the Outbox, retry or DLQ.
11. **FR-11 Warm-up gate.** Load inventory into Redis before the sale and open the sale only after warm-up is complete and confirmed.
12. **FR-12 Stage timestamps and history.** Record the state and a timestamp at each processing stage, including a state-transition history.
13. **FR-13 Client and message deduplication.** Reject duplicate client submissions (Idempotency-Key) and ignore duplicate or invalid events without repeating a state transition.
14. **FR-14 Load shedding.** When configured limits are reached (Nginx rate limit, application concurrency limit, bounded RabbitMQ queue), reject new work early with a suitable status code, before an order is created. Never return "accepted" for work the system cannot guarantee to continue. Evaluated in C3.

## 4.2 Non-Functional Requirements

- **Consistency.** In every tested workload and failure scenario: inventory never goes negative; successful reservations never exceed the initial inventory; an order is reserved at most once; a duplicate message causes no duplicate side effect. Checked after each run by the four invariants in `docs/inventory-invariants.md`; a failed or inconclusive run is reported, never counted as a pass.
- **Performance.** Evaluate at several load levels. Every experiment records the EC2 configuration, virtual users and request rate, test duration, number of products, initial inventory, number of consumer replicas, payload size, and the PostgreSQL, Redis and RabbitMQ configuration. The initial target is about 2,000 reservation attempts per second on the chosen hardware; this is an experimental target, not a hardware-independent guarantee. API throughput and business-completion throughput are reported separately.
- **Resilience.** Under overload, reject part of the load in a controlled way instead of accepting without limit. After load drops, the backlog must drain and the system must return to a stable state without a full restart.

- **Observability.** Every order can be traced by correlation ID, order ID, message ID, current status and state-transition history, plus four timestamps: request acceptance, event publication, stock processing and completion.
- **Liveness.** Every accepted order reaches a terminal state or is surfaced by reconciliation; order counts by state must reconcile with the number of accepted requests.
- **Replication scope.** Compare 1, 2 and 4 Inventory consumer replicas on the same EC2 host; do not claim multi-node scalability from these runs.
- **Reproducibility.** Reset, seed and warm up before each run; repeat each configuration 3–5 times; report percentiles, median and run-to-run variation, not only averages.

# 5 Technology Selection

### ABP Framework 10.6 on .NET 10

Required by the brief. Used for module wiring, EF Core integration and hosting, from the `app-nolayers` template to keep each service's codebase proportional to its size [1, 12]. ABP's own RabbitMQ event bus (`Volo.Abp.EventBus.RabbitMQ`) is *not* used: messaging goes through `RabbitMQ.Client` 7.1.2 directly, because the design needs per-message publisher confirms and plain (non-enveloped) JSON messages per event, which the implementation chapters explain [20].

### PostgreSQL 16

The durable, transactional side (orders, Outbox, Inbox). The Transactional Outbox needs the business write and the event write to commit in one ACID transaction, so a relational engine is a prerequisite. One instance with a schema and a database account per service (schema-per-service, not physical isolation). It also hosts the C1 baseline's conditional atomic update [14, 15].

### Redis Stack with Lua

Holds available inventory and the reservation-level duplicate set. The script `reserve.lua` (in `scripts/redis`) checks idempotency, checks stock, decrements and records the result atomically, in one script call, which Redis runs atomically [22, 21]. Accessed through `StackExchange.Redis`. RedisInsight (bundled with Redis Stack) is for inspection only.

### RabbitMQ vs. Kafka

RabbitMQ fits this workload: routed queues per consumer, publisher confirms, bounded retry, dead-lettering and bounded queues with an overflow policy for load shedding. Historical log replay, Kafka's main advantage, is not part of the research scope [17, 18, 19].

### Nginx

Entry point and first load-shedding layer (`limit_req` rate limiting [13]). Sufficient for a single-host deployment without a full API gateway.

### Serilog, prometheus-net, Prometheus, Grafana

Structured JSON logs carrying correlation, order and message IDs (Serilog),

service metrics exported by `prometheus-net`, scraped by Prometheus and viewed in Grafana.

### Docker Compose

Runs PostgreSQL, Redis, RabbitMQ, Nginx and the monitoring stack identically on a developer machine and the EC2 host.

### Terraform and AWS EC2

The brief requires the system under test on one EC2 instance. Terraform (`infra/terraform/`) creates that host and a separate JMeter host reproducibly and removes them again (Section 8.9) [7, 2].

### Apache JMeter

Simulates concurrent clients through the order and status APIs [4]. It runs on a separate machine so it does not compete with the system under test.

# 6 Development Environment

## 6.1 Local infrastructure (Docker Compose)

`infra/docker-compose.yml` defines the local data, broker, proxy, and monitoring containers. From the repository root, start them with `docker compose -f infra/docker-compose.yml up -d`:

| Service | Image | Host ports |
|---|---|---|
| PostgreSQL | `postgres:16` | 5432 |
| Redis Stack | `redis/redis-stack:latest` | 6379 (data), 8001 (RedisInsight UI) |
| RabbitMQ | `rabbitmq:3-management` | 5672 (AMQP), 15672 (management UI) |
| Nginx | `nginx:latest` | 8080 (host) → 80 (container) |
| Prometheus | `prom/prometheus:latest` | 9090 |
| Grafana | `grafana/grafana:latest` | 3000 |

The .NET services currently run on the host; Prometheus reaches them through `host.docker.internal`. PostgreSQL's `flashsale` account is for local bootstrap only. Order Service and Inventory Service use separate local roles created by `infra/initdb/01-create-service-roles.sql`. These development passwords are not deployment secrets. Mutable image tags must be pinned before official experiments.

## 6.2 Toolchain

`setup.ps1` contains Windows onboarding defaults, not a record that every tool was installed or verified on the benchmark host. Record the actual .NET SDK, Docker images, Terraform version, JMeter version, and AWS instance configuration in each experiment's run manifest.

| Tool | Use |
|---|---|
| Git | Source control |
| .NET SDK | Build and run the services |
| Docker Compose | Run local dependencies |
| Terraform | Create and remove the EC2 backend and JMeter hosts |
| Apache JMeter | Generate load from a separate machine |

**Pinned versions.** The .NET SDK is pinned by `global.json` to 10.0.300 (any later 10.0.3xx patch is accepted; other versions fail fast). All projects target `net10.0` and use ABP 10.6.0, the LeptonX Lite theme 5.4.0 and `RabbitMQ.Client` 7.1.2. No package uses a floating version, so a clean build resolves the same dependencies on every machine.

**Fresh-environment check.** `scripts/verify-environment.ps1` starts a temporary PostgreSQL container and proves the setup from nothing. It checks the SDK against `global.json`, then does a clean build of the whole solution. It runs both services' migrations, each with its own database account, and applies the baseline schema. Finally it checks account isolation: each service can use its own schema, cannot read the other's, and only Order Service can use `public`. It also checks the schema against the ERD. On 2026-10-01 it passed from a fresh clone with 0 build errors and 0 warnings. With `-Mode Existing`, the same checks run on a copy of an existing database after the role script is applied twice.

**Runtime check on the local stack (TP-E04).** The checks above use temporary databases. A 2026-10-13 audit found that the project's own local Compose database had never had the role script applied: it had no service accounts, and every table was owned by the admin account. The documented existing-database procedure was re-run on a copy (49/49), then applied to the real database after a backup. `scripts/verify-runtime-accounts.ps1` then starts all three services with their checked-in settings against the local Compose stack and places three orders, which all complete. While the services run, every Order Service database session belongs to `order_service_user`, and every Inventory session to `inventory_service_user`. Each connection string sets an `Application Name`, so every session can be tied to its service. No service connects as the admin account, and the Process Worker has no database at all. With the services' own credentials, each cross-schema read is refused ("permission denied for schema"), and each own-schema read succeeds. The check passed 61/61, including the ERD comparison. A negative control that switches Inventory to the admin account fails three checks.

Run project commands from the repository root and resolve script paths relative to the script location. Do not rely on a machine-specific drive letter or an untracked setup checklist.

# 7

# System Analysis and Design

## 7.1 Entity-Relationship Diagram

The data model below is taken from the EF Core models and migrations, the raw baseline SQL and the role/schema initialisation script, not drawn by hand. `docs/erd.md` holds the same diagrams plus a machine-readable manifest, and `scripts/verify-erd.ps1` compares that manifest with a live database. On 2026-10-01 a database built from scratch (role initialisation, then both services' migrations, then the baseline schema) passed all 29 checks.

**Architecture of the data layer.** One PostgreSQL instance holds one schema per service. Order Service writes `order_service`, plus ABP's module tables in `public`. Inventory Service writes only `inventory_service`. Each schema is owned by its own login role (`order_service_user`, `inventory_service_user`). Neither role can read the other's schema, and only Order Service's role can use `public`. The services share data only through RabbitMQ events. There are no foreign keys: links such as an Outbox row's `OrderId` are logical, and they are kept consistent by writing both rows in one local transaction. Inventory's `OrderId` refers to an order in another service's schema, so it could not have a foreign key anyway. In the asynchronous design, stock is held in Redis, not PostgreSQL: `inventory:{productId}` stores available units and `processed:{productId}` stores the ids of orders already reserved.

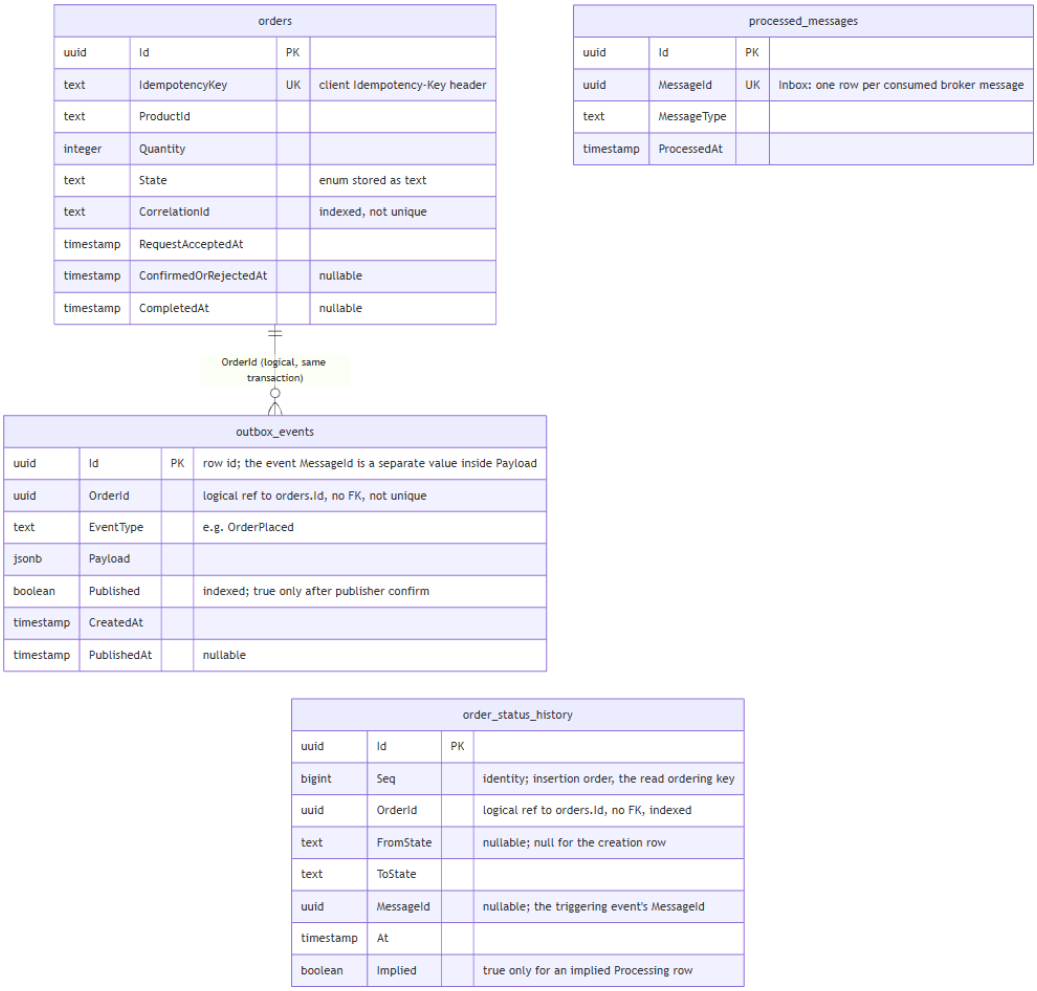



**Figure 7.1.** – `order_service` schema (Order Service). The Outbox row references its order logically through `OrderId`. The Inbox (`processed_messages`) is unique per broker `MessageId`.

| outbox_events | | | |
|---|---|---|---|
| uuid | Id | PK | row id; the event MessageId is a separate value inside Payload |
| uuid | OrderId | UK | one result event per order; cross-service id, no FK |
| text | EventType | | StockReserved or StockRejected |
| jsonb | Payload | | |
| boolean | Published | | indexed |
| timestamp | CreatedAt | | |
| timestamp | PublishedAt | | nullable |

| processed_messages | | | |
|---|---|---|---|
| uuid | Id | PK | |
| uuid | MessageId | UK | Inbox: one row per consumed OrderPlaced message |
| text | MessageType | | |
| timestamp | ProcessedAt | | |

**Figure 7.2.** – `inventory_service` schema (Inventory Service). It has both an Outbox, unique per `OrderId` so one order yields at most one stock result event, and an Inbox, unique per `MessageId`.

| inventory | | | |
|---|---|---|---|
| text | product_id | PK | |
| integer | stock | | no CHECK >= 0 on purpose: C0 must be able to oversell |

| baseline_orders | | | |
|---|---|---|---|
| uuid | id | PK | default gen_random_uuid() |
| text | config | | CHECK in ('C0','C1') |
| text | product_id | | |
| text | result | | CHECK in ('Confirmed','Rejected') |
| timestamptz | created_at | | default now() |

**Figure 7.3.** – C0/C1 baseline tables (raw SQL, not EF-migrated). `stock` deliberately has no non-negative check so that C0 can demonstrate overselling.

**Unique constraints.** Four unique indexes carry the system's idempotency guarantees: `orders.IdempotencyKey` (one order per client key), `processed_messages.MessageId` in each service schema (each broker message is applied at most once by each consumer), and `inventory_service.outbox_events.OrderId` (at most one stock result per order). Non-unique indexes support trace lookup (`orders.CorrelationId`) and Outbox polling (`Published`).

**ABP and the `public` schema.** Order Service is an ABP application. Its first migration creates 37 ABP module tables (`Abp*`, `OpenIddict*`) and its EF migration history in `public`, all owned by `order_service_user`. They stay in `public` because forcing a default schema breaks some ABP modules at runtime. Inventory Service configures no ABP modules. Its connection string sets the search path to `inventory_service`, so its migration history is stored there. No business or experiment data lives in `public`.

**Ownership defects found by this check.** Two were found and fixed. First, on a fresh database the baseline tables were owned by the `flashsale` admin account that creates them, so `order_service_user` had no privileges on them and the C0/C1 runs would have failed. The baseline schema script now hands them to `order_service_user`. Second, on a database created before the per-service accounts existed, both services shared one migration-history table in `public`. Once Inventory Service connected with its own search path, it re-ran its migrations and failed with "relation already exists". The role script now moves Inventory's history rows into `inventory_service`. Both the fresh and the existing-database paths are checked by `scripts/verify-environment.ps1`.

The Order Service schema also holds `order_status_history`, the per-order transition history required by the six-state model (Section 7.5). Each row records the from-state, the to-state, the triggering `MessageId`, the time, and whether the step was implied. An identity column, `Seq`, gives the order in which the rows were written, and every read of the history uses it.

## 7.2 Class Diagram

The domain and messaging classes below are taken from the source (`Entities/` in Order and Inventory Service and the shared `FlashSale.EventContracts` library; `docs/class-diagram.md`). `scripts/verify-design-alignment.ps1` checks that every class and property in the diagrams exists in code with the same type, and that no public property is missing. Inventory Service has its own `OutboxEvent` and `ProcessedMessage` classes in its own schema; the two services share no entity classes, only the event contracts.

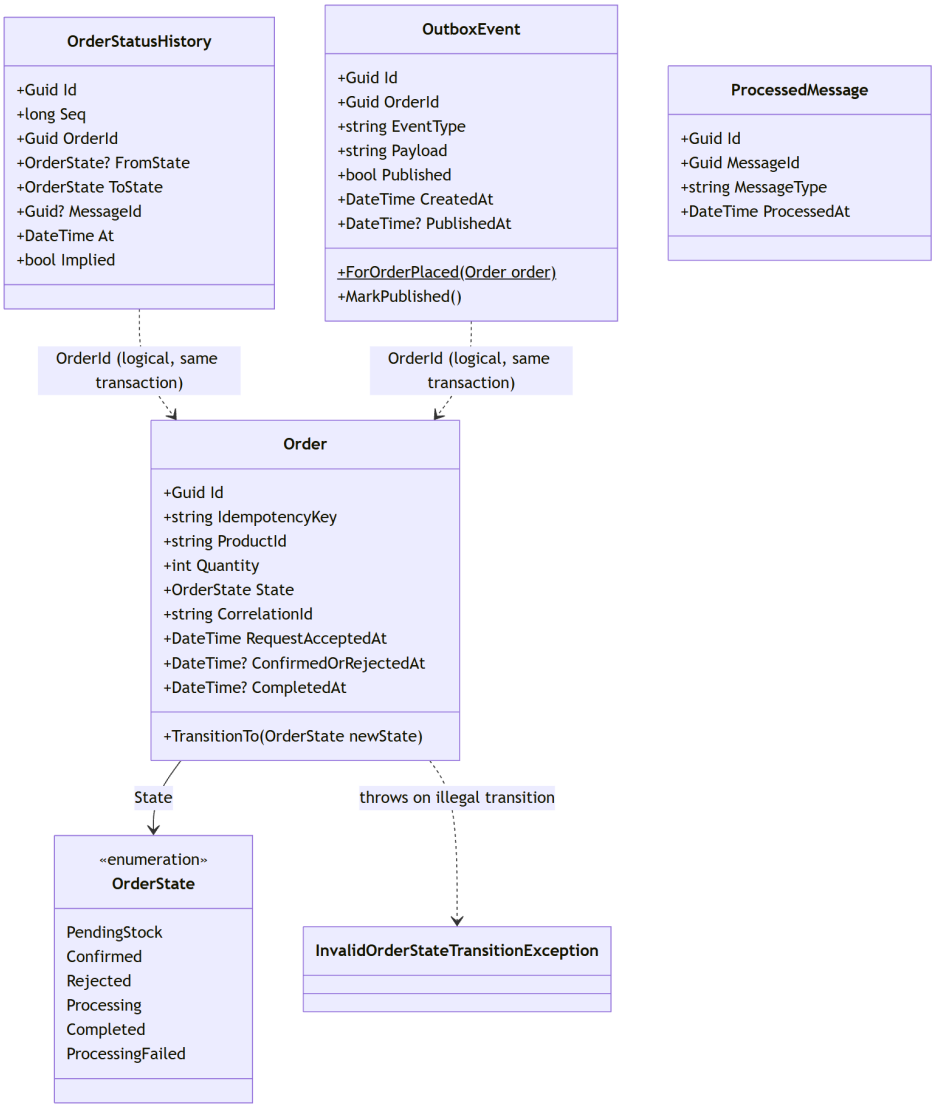



**Figure 7.4.** – Order Service domain classes. `Order.TransitionTo` enforces the state machine; the Outbox row refers to its order only logically.

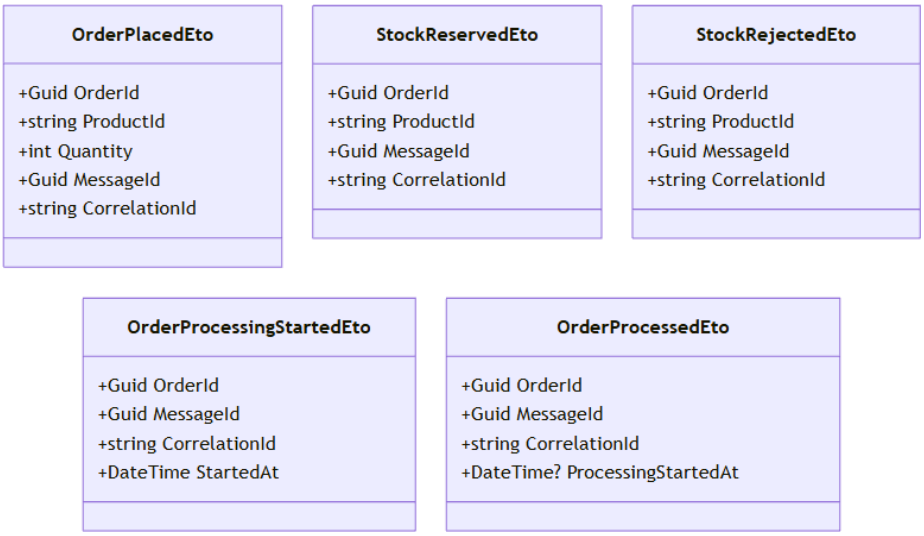



**Figure 7.5.** – Event contracts shared by all services. Every event carries a `MessageId` (Inbox key) and a `CorrelationId` (trace key).

The code has the six-state model, with `OrderState.Processing`, `OrderState.ProcessingFailed`, the `OrderProcessingStartedEto` event and the `OrderStatusHistory` entity. All of them are drawn above.

## 7.3 API Contract

ABP generates the OpenAPI document from the running controllers; it is exported to `docs/api-contract-v1.json`. Since 2026-10-01 each order endpoint declares its outcomes with `[ProducesResponseType]`, so the export lists every status code the code can return. The alignment check compares the committed file with the live export of the same build.

| Endpoint | Status | Meaning |
|---|---|---|
| `POST /api/orders` | 201 | New order accepted in `PendingStock`; body is the order with its id |
| | 200 | Same `Idempotency-Key` and same body as an earlier request: the original order |
| | 400 | `Idempotency-Key` missing, or invalid body (quantity $\neq 1$, blank product) |
| | 409 | Key already used with a different body |
| `GET /api/orders/{id}` | 200 | Current state and the stage timestamps |
| | 404 | Unknown order id |
| `POST /api/c1/orders` | 200 | C1 baseline decision: `Confirmed` with remaining stock, or `Rejected` |

Request validation (quantity must equal 1, non-blank product and key) was is verified by case TP-A02. With load shedding on, a new request is also rejected before order creation when admission capacity is exhausted (503, case TP-L01). The remaining paths in the export are ABP module scaffolding (identity, account, permissions, multi-tenancy). The scope lock excludes them, and they play no part in the order workflow.

## 7.4 Event Contract

The event classes live in the `FlashSale.EventContracts` project, and the full contract is `docs/event-contract.md`. All events go through one direct exchange, `flashsale.order.exchange`, with the event name as routing key.

| Event | Publisher | Consumer(s) | Transition |
|---|---|---|---|
| `OrderPlacedEto` | Order Service (Outbox) | Inventory Service | new → `PendingStock` |
| `StockReservedEto` | Inventory Service (Outbox) | Order Service, Process Worker | `PendingStock` → `Confirmed` |
| `StockRejectedEto` | Inventory Service (Outbox) | Order Service | `PendingStock` → `Rejected` |
| `OrderProcessingStartedEto` | Process Worker | Order Service | `Confirmed` → `Processing` |
| `OrderProcessedEto` | Process Worker | Order Service | `Processing` → `Completed` |

Each event carries `MessageId`, regenerated at every hop because each consumer keeps its own Inbox, and `CorrelationId`, copied unchanged from the inbound request so one value traces the whole journey. The Process Worker sets `MessageId` equal to `OrderId`, because it has no database of its own; a replay then carries the same `MessageId`, and the Inbox drops it. `StockRejectedEto` has no `Reason` field, because insufficient stock is the only rejection cause in scope.

## 7.5 Order State Machine

See `docs/order-state-machine.md` for the full diagram and transition table. The adopted model (decided 2026-10-01) uses the teacher's six named states: `PendingStock`, `Confirmed`, `Rejected`, `Processing`, `Completed` and `Processing-Failed`. `Processing` is reachable through a dedicated `OrderProcessingStarted`

event published by the Process Worker when it begins work, followed by `OrderProcessed` for `Processing` → `Completed`. `ProcessingFailed` is declared but unreachable by design: the scope lock gives the Process Worker a deterministic, successful outcome only, so no in-scope event produces it (the success-only interpretation). Reordered or duplicated Worker events are absorbed by explicit rules (stale events are no-ops; an early `OrderProcessed` applies an implied `Processing` step in the same transaction), and every transition is appended to an order status history. The code implements exactly this model, and the alignment check compares the transition table with `Order.LegalTransitions`. The implementation and its verification are described in Section 8.7.

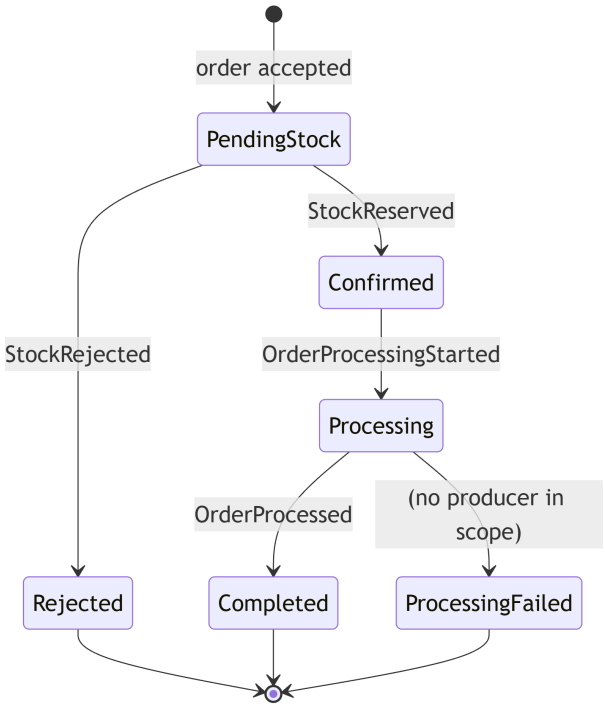



**Figure 7.6.** – Adopted six-state order model. `ProcessingFailed` has no producer in scope.

## 7.6 Sequence Diagrams

The full diagrams are in `docs/sequence-diagrams.md`, and the numbered steps are described in `docs/workflow.md` (Section 8.4.4). The diagrams show the code as built, and every arrow corresponds to a call in the source; test case TP-W04 (`scripts/verify-workflow.ps1`) checks each drawn claim against the code and configuration:

- both Outboxes, with their publishers (a 2-second poll, and the next batch at once after a full one);

- the routed-confirmation check of each event's required queues;
- the Inbox check before each consumer's business step;
- the Lua reservation, including the `NOT_OPEN` warm-up gate;
- the concurrent delivery of `StockReserved` to Order Service and to the Process Worker;
- status polling.

Clients post and poll through Nginx, which applies the C3 rate limit (Section 8.8); that hop is exercised by TP-L01 and TP-L04. The `Processing` hop of the six-state model is drawn in a separate diagram. Retry and DLQ branches are listed per step in Section 8.4.4 rather than drawn.

The diagrams are checked against the implementation by test case TP-W04 (`scripts/verify-workflow.ps1`), in two ways:

- 38 static checks compare each arrow with the code and the `appsettings.json` files.
- A live run traces real orders through all three services and checks their database rows, timestamps, Redis keys and logs against the step order.

## 7.7 Idempotency, Ordering and Ownership

The full definitions, each tied to the code that implements it, are in `docs/design-decisions.md` and are checked by `scripts/verify-design-decisions.ps1`.

**Transport versus business idempotency.** Two *transport* keys absorb retries of the same request or message. The client's `Idempotency-Key` is unique per order, and a reused key with a different body returns 409. The broker's `MessageId` is unique per consumer Inbox and is written in the same transaction as the business change. The *business* key is `OrderId`. Redis's per-product set of reserved order ids and the unique `OrderId` on Inventory's Outbox guarantee one deduction and one result per order even when the same fact arrives as a new message, for example the reconciliation job re-publishing `OrderPlaced`.

**Ordering and replay.** The design does not rely on message order. Duplicates and events for a state already reached are acknowledged as no-ops. A conflicting result goes to the service's dead-letter queue. An event that arrives before its prerequisite is retried, never dropped. Replaying any message leaves stock, state and Outbox rows unchanged.

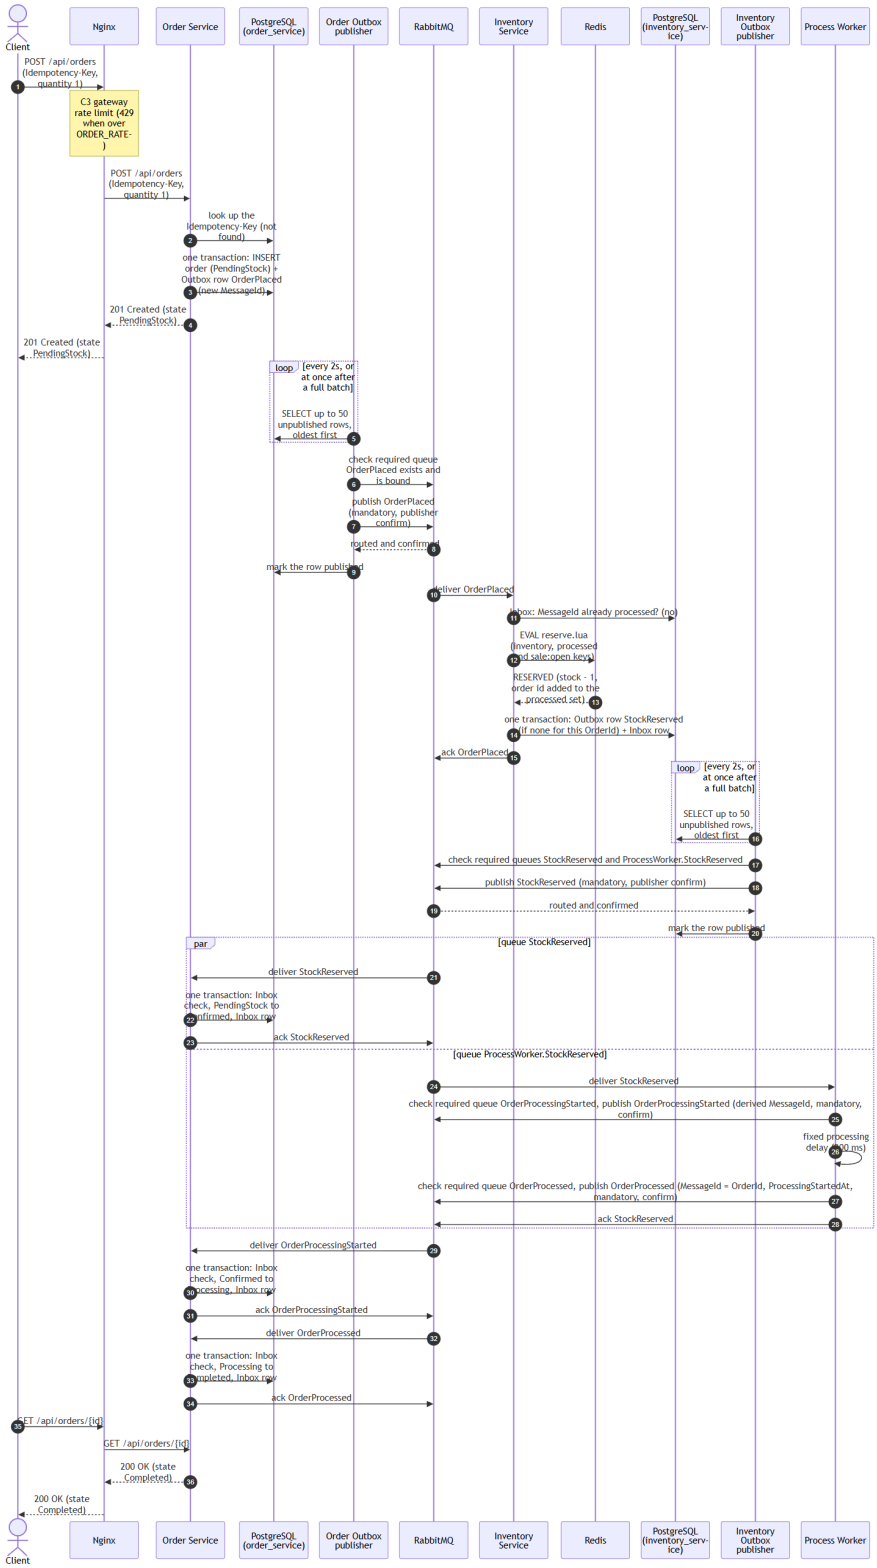



**Figure 7.7.** – Happy path as built: order accepted, stock reserved, result applied, processed, polled as `Completed`. The step numbers match Table 8.1.

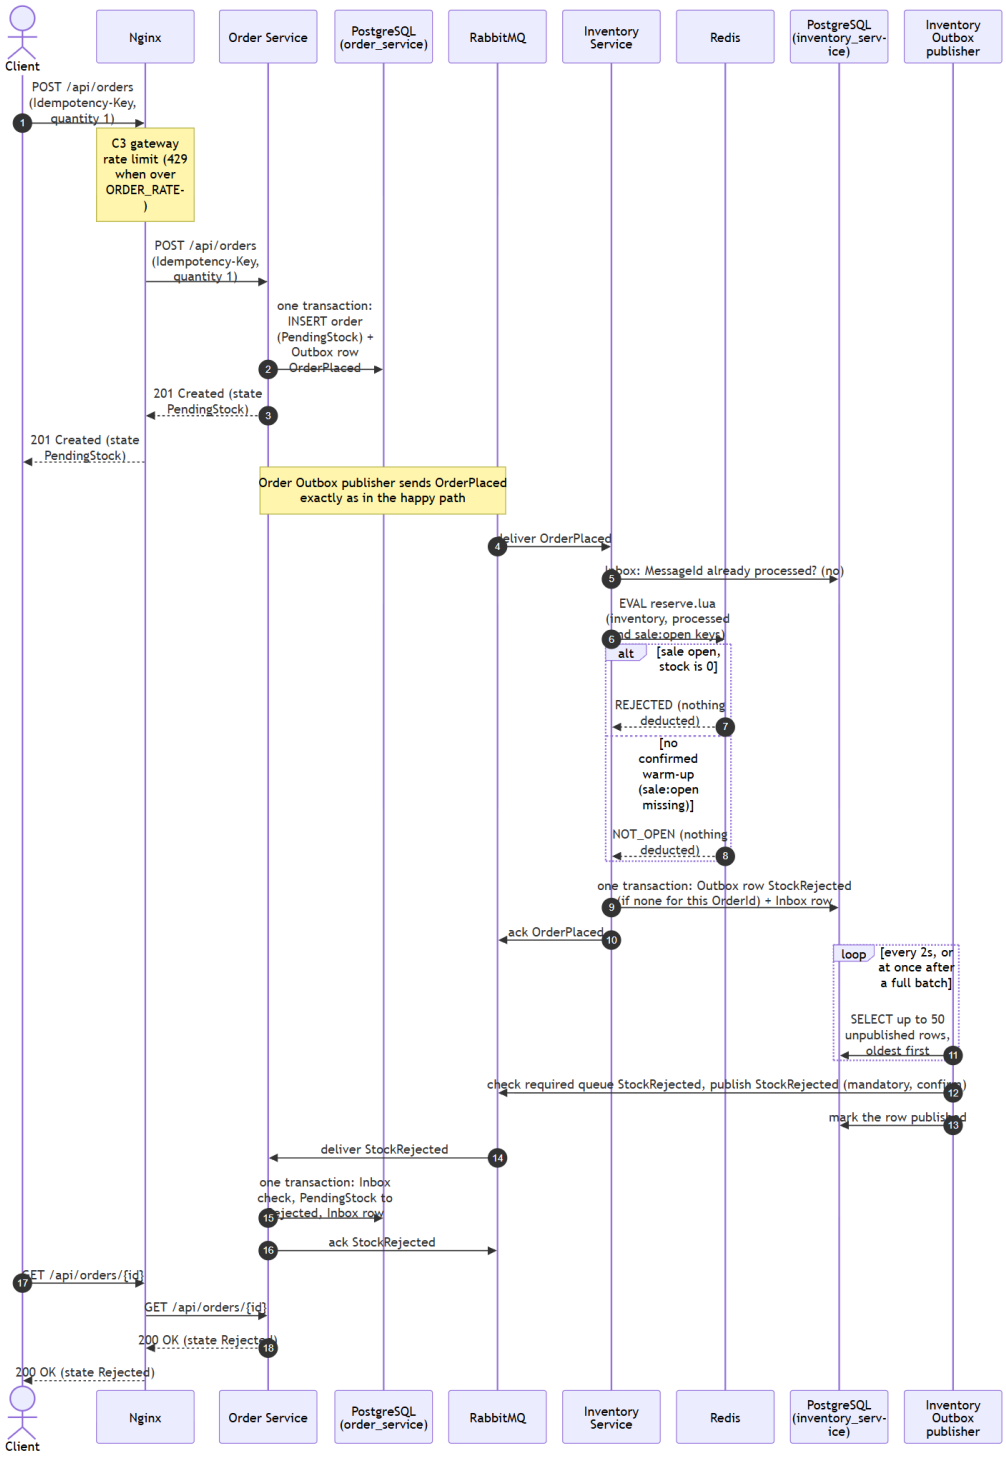



**Figure 7.8.** – Rejection path: the same as the happy path up to the Lua script. `REJECTED` (sold out) and `NOT_OPEN` (no confirmed warm-up) both lead to `StockRejected` and the terminal state `Rejected`. The Process Worker is not involved.

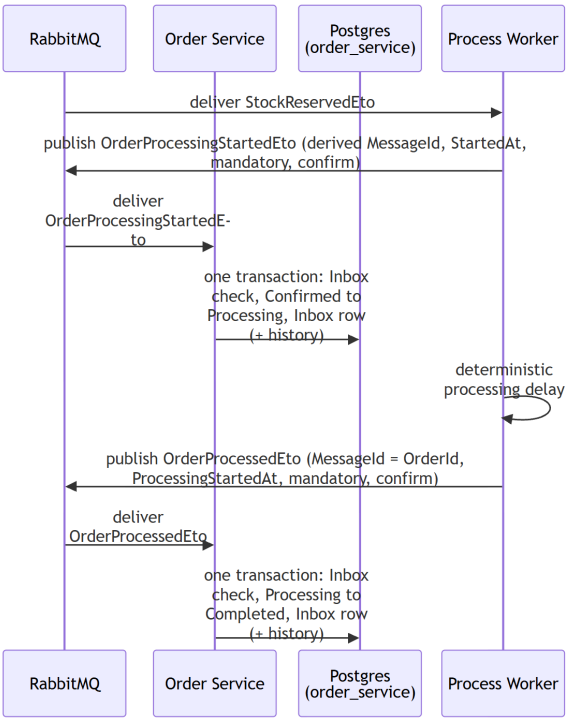



**Figure 7.9.** – The `Processing` hop of the six-state model: the Worker's start event moves the order to `Processing`, and its completion moves it to `Completed`.

**Schema ownership.** Each schema has one owner account (`order_service`, plus ABP's `public` tables, belongs to Order Service; `inventory_service` belongs to Inventory Service). Redis inventory keys belong to Inventory Service. Services never read each other's data; facts cross service boundaries only as events.

**Redis/PostgreSQL boundary.** Redis decides the reservation atomically; PostgreSQL then records the result (Outbox row and Inbox row) in one transaction, and only then is the message acknowledged. If PostgreSQL fails after Redis has reserved, the message is redelivered. The Lua script answers `DUPLICATE` without a second deduction, and the missing result is written.

## 7.8 Design Rationale

The project compares a synchronous PostgreSQL conditional update (C1) with an asynchronous, event-driven design (C2–C4) under the same correctness invariants. Each mechanism in the asynchronous design was chosen for one reason:

- **Accept first, decide later (HTTP 201 in `PendingStock`).** It separates the request acceptance rate from the processing rate, so API latency and completion latency are measured separately, as the brief requires.

- **Redis Lua for the stock decision.** It makes the idempotency check, the stock check and the decrement one atomic step in memory, instead of a row lock that every buyer of a hot product waits on in C1.
- **Transactional Outbox on both producers.** It removes the dual-write problem: an order (or a stock result) and its event commit together or not at all, and a publisher retries until the broker confirms.
- **Inbox per consumer.** RabbitMQ delivers at least once; a unique `MessageId` written with the business change makes every effect happen at most once.
- **Direct exchange, one queue per consumer.** Order Service and the Process Worker each get their own copy of `StockReserved`; sharing a queue would split the messages between them.
- **Schema-per-service on one PostgreSQL instance.** It gives ownership and isolation by account at the cost of a single shared server, which the brief accepts as a limitation (not physical isolation).
- **Success-only Process Worker.** It keeps the downstream stage deterministic, so latency variation in the results comes from the architecture rather than from simulated failures. That is why `ProcessingFailed` has no producer.

The cost of these choices is complexity: three services, two Outboxes, two Inboxes, a broker and a cache, compared with one SQL statement in C1. The Experimental Design and Results chapters quantify what this buys. Replica results (C4) are limited to processes on one host and do not show multi-node scaling.

## 7.9 Supported Failure Model

The table lists the failures the design handles, how it handles them, and where that handling is verified. “Designed” means the mechanism exists in code but has no saved verification yet; it is not a claim that it works.

| Failure | Handling | Verification |
|---|---|---|
| Client retries the same request (also concurrently) | `Idempotency-Key`: same body returns the original order, different body returns 409; a lost unique-index race is answered as a replay | Verified: TP-A03–A05 |
| Broker redelivers a message | Inbox (unique `MessageId`) in the same transaction; ack after commit | Unit tests pass (TP-E03); live: TP-M01 |
| Same order arrives as a new message | Redis `DUPLICATE`; unique `OrderId` on Inventory Outbox; guarded state machine | Verified: TP-M02 |
| Crash after commit, before ack | Redelivery hits the Inbox and is acked | Verified: TP-M01 |
| Broker unreachable while publishing | Outbox row stays unpublished; publisher retries; consumers reconnect every 5 s | Verified: TP-O01, TP-O02 |
| PostgreSQL fails after Redis reserved | Not acked: retried, then dead-lettered; a retry or replay gets Lua `DUPLICATE` and writes the missing result once | Verified: TP-I03 |
| Transient handler error | Bounded retry (4 attempts: 1 s, 2 s, 4 s), then the service's DLQ | Verified: TP-F01 |
| Poison message or state conflict | Straight to the service's DLQ, no retry | Verified: TP-F01 |
| Order stuck in `PendingStock`, `Confirmed` or `Processing` | Reconciliation job re-publishes `OrderPlaced` after a timeout, at most 3 times, then an alert; Inventory re-sends a stored result, which also reaches the Worker (safety net only) | Verified: TP-F02 (`Confirmed`/ `Processing` since the review, Section D) |
| Overload | Nginx rate limit, application concurrency limit, bounded queue; reject before creating an order, bounded Outbox backlog and bounded unfinished orders; drain and recovery after overload | Verified: TP-L01, TP-L02; TP-L04 local (after the review) and on EC2 (earlier code) |

**Known gaps in the supported model.** None remain open in the delivery path. An `OrderProcessed` that arrives while the order is still `PendingStock` used to be dead-lettered. It is now requeued onto delayed retry queues and applied once the order is `Confirmed` (TP-M02). The database-error defect, where an error was treated as a duplicate and the result lost, was fixed in Inventory Service (TP-I03) and in Order Service (TP-W03).

**Not supported (out of scope).** Redis, RabbitMQ or PostgreSQL cluster failover or replication; loss of Redis data without re-running the warm-up; payment failure and compensation (the Process Worker is success-only); multi-region or multi-node failures; authentication-related failures.

# 8 Implementation

## 8.1 Baseline Configurations: C0 and C1

Before building the real asynchronous design, two controlled baseline configurations were built inside Order Service, with no separate Inventory Service involved. Both use one raw-SQL table, `order_service.inventory`. It is deliberately *not* EF Core-migrated (see `docs/erd.md`), because C0 and C1 are baseline scaffolding, not the final design. Every result in this section was produced on 2026-10-01 from a fresh clone of the repository and a brand-new PostgreSQL database built by `scripts/verify-environment.ps1`, with Order Service connecting under its own account (`order_service_user`). The method and pass rules are in `docs/baseline-c0-c1.md`; the raw evidence is in `tests/baseline/results/` and `tests/jmeter/results/`.

### 8.1.1 Reset and seed

`scripts/reset-and-seed.ps1` applies the baseline schema, empties both baseline tables and inserts the starting inventory: `c0-demo-product` = 1, `c1-demo-product` = 1 and `flash-product-1` = 1000, with no other rows and no order rows. `scripts/verify-reset-seed.ps1` proves the script is repeatable. It runs it, then deliberately breaks every table (wrong stock, a deleted seed row, an extra product and 25 leftover order rows), then runs it twice more. All three snapshots matched the expected state exactly and were identical to each other (`20261001T090034Z-reset-seed.log`).

### 8.1.2 C0 – the naive baseline (a controlled failure demonstration)

C0 (`src/FlashSale.OrderService/Experiments/C0Naive/C0NaiveDemo.cs`) implements the textbook race condition. It reads the current stock, checks it in application code, then issues a separate, unconditional `UPDATE`: two round trips with no locking between them.

```
SELECT stock FROM order_service.inventory WHERE product_id = @p;
```

```
-- (application code checks: stock > 0 ?)
UPDATE order_service.inventory SET stock = stock - 1 WHERE product_id = @p;
```

C0 has no HTTP route. It runs only via `dotnet run -- --run-c0-demo`, which bypasses the ABP host, so no stray request can reach it later in the project. Five concurrent attempts were fired at a product seeded with `stock = 1`. All five wait on a shared start gate so they reach the read at the same instant, and a 50 ms pause between read and write widens the race window so it reproduces on every run. The captured result (`20261001T085538Z-c0-race.log`):

```
[C0] Seeded 'c0-demo-product' with stock = 1. Firing 5 concurrent naive
↪  requests...
[C0] Attempt 4: saw stock=1, Confirmed.
[C0] Attempt 1: saw stock=1, Confirmed.
[C0] Attempt 3: saw stock=1, Confirmed.
[C0] Attempt 2: saw stock=1, Confirmed.
[C0] Attempt 5: saw stock=1, Confirmed.
[C0] Result: 5 of 5 concurrent requests got 'Confirmed' for a product seeded
↪  with stock = 1.
[C0] OVER-SOLD: more than one request reserved the same single unit of stock.
↪  This is the bug C1 (Step 3.3) fixes.
[C0] Final stock in database: -4 (started at 1).
```

All five requests believed they had reserved the single unit, and the database was left at $-4$. This is the race condition C1 exists to eliminate. `order_service.inventory` deliberately has no `CHECK (stock >= 0)` constraint, so that the bug shows up as overselling instead of being turned into an unhandled exception.

### 8.1.3 C1 – the PostgreSQL atomic update

C1 (`src/FlashSale.OrderService/Controllers/BaselineOrdersController.cs`, `POST /api/c1/orders`) replaces the two round trips with one conditional statement. Its `WHERE` clause is evaluated by PostgreSQL against the row's current value while holding the row lock, not against a value the application read earlier:

```
UPDATE order_service.inventory
SET stock = stock - 1
WHERE product_id = @productId AND stock >= 1
RETURNING stock;
```

The update and the outcome row in `baseline_orders` commit in one transaction, so the log cannot disagree with the stock. A separate `SELECT ... FOR UPDATE` [16] followed by an `UPDATE` was avoided, because it re-creates C0's two-statement window unless written very carefully. C1 lives on its own route; `/api/orders` belongs to the asynchronous design, so both configurations stay independently reachable for the experiments.

**Concurrent demand below, equal to and above stock.** `scripts/run-baseline.ps1` seeds `c1-demo-product` with 100 units, starts every request before reading any response, and repeats each scenario three times:

| Scenario | Requests | Confirmed | Rejected | Final stock | HTTP 200 | Verdict |
|---|---|---|---|---|---|---|
| Below stock | 50 | 50 | 0 | 50 | 50/50 | PASS (3/3 runs) |
| Equal to stock | 100 | 100 | 0 | 0 | 100/100 | PASS (3/3 runs) |
| Above stock | 150 | 100 | 50 | 0 | 150/150 | PASS (3/3 runs) |

In all nine runs, Confirmed equalled $\min(\text{demand}, 100)$, stock never went negative, final stock equalled 100 minus Confirmed, and `baseline_orders` held exactly one row per request (`20261001T085538Z-c1-*-run*.json`).

**Connection-pool finding.** The first concurrent prototype never oversold, but 3–31 of every 150–300 requests failed with HTTP 500 (`53300: sorry, too many clients already`). Npgsql's default pool of 100 connections per service is larger than what PostgreSQL's default `max_connections = 100` leaves for ordinary roles (97), and both services share that server. The pools are now capped at 60 (Order Service) and 30 (Inventory Service). These sizes are part of the experiment configuration and are recorded with every run. C4 keeps these pools, so four Inventory replicas can open $60 + 4 \times 30 = 180$ connections; the EC2 stack therefore raises `max_connections` to 200.

### 8.1.4 Correctness criteria

The invariants in `docs/inventory-invariants.md` are applied as follows. Invariant 1 (`available_inventory >= 0`) and Invariant 2 (`successful_reservations <= initial_inventory`) are checked after every run from the database itself: final stock, and Confirmed rows in `baseline_orders`. C0 violates both under concurrency (final stock $-4$, 5 successes for 1 unit). C1 satisfied both in all nine runs. The captures add two run-level checks: every request receives a decision (HTTP 200 with `Confirmed` or `Rejected`, and no errors), and stock is conserved (final stock = initial stock − Confirmed). Invariants 3 and 4 (one reservation per order; no duplicate effect from a redelivered message) need an order identity and message delivery. C0 and C1 have neither, so those invariants are checked on the asynchronous design.

### 8.1.5 JMeter smoke test

The checked-in plan `tests/jmeter/smoke-test.jmx` runs 10 threads with one `POST /api/c1/orders` each for `flash-product-1`. Each sample carries two assertions: HTTP status 200, and a body that is a `Confirmed` decision for that product with a `remainingStock` value. The previously committed result file had been recorded against `/api/orders`, the asynchronous endpoint, so it did not match the plan. It was removed and replaced. `scripts/run-jmeter-smoke.ps1` resets and seeds the database, runs the plan with JMeter 5.6.3, saves a timestamped JTL and cross-checks it against the database.

Result (`tests/jmeter/results/20261001T090632Z-c1-smoke.jtl`): 10 of 10 samples hit `/api/c1/orders`, all returned 200 and passed both assertions, the database recorded exactly 10 Confirmed C1 decisions, and stock fell from 1000 to 990. Elapsed time was 28 ms minimum, 36.5 ms median and 162 ms maximum. These figures come from one local smoke run and are a functional check, not a performance result. A control run against a product with no stock still returned 200 but failed the content assertion on all 10 samples, which shows the assertions can fail.

## 8.2 Order Service

Order Service accepts orders, stores them with their `OrderPlaced` Outbox row, answers status polling, and applies the stock and processing results that come back as events. The behaviour below is specified in `docs/order-api.md`. Every claim in this section is backed by the saved evidence (`tests/evidence/20261001T123816Z-*`), produced from a fresh clone on a brand-new database with Order Service running under its own database account.

### 8.2.1 API design

| Request | Status | Meaning |
|---|---|---|
| `POST /api/orders` | 201 | New order in `PendingStock`; body is the order with its id and `requestAcceptedAt` |
| | 200 | Same `Idempotency-Key` and same body: the original order, unchanged |
| | 400 | Missing or blank key, quantity $\neq 1$, blank product, or malformed JSON; nothing is stored |
| | 409 | Key already used with a different body; the original order is unchanged |
| `GET /api/orders/{id}` | 200 | Current state and the stage timestamps |
| | 404 | Unknown order id |

The request carries `productId` and `quantity`. Quantity must equal 1, because flash-sale orders are single-unit and the reservation script decrements exactly one unit. A product id with no stock is *not* a validation error: the order is accepted, and Inventory Service rejects it asynchronously. The order row and its `OrderPlaced` Outbox row are written in one `SaveChangesAsync` call (Section 8.2.5). All timestamps are UTC with a `Z` suffix and are stored at microsecond precision, so a value read back from PostgreSQL equals the value returned at creation. Validation runs before any write, so a rejected request leaves no order and no Outbox row.

### 8.2.2 Idempotency strategy

The client sends an `Idempotency-Key` header. It is the *transport* key for client retries, and is distinct from the broker's `MessageId`, which the Inbox uses to absorb redelivered messages (Section 7.7). The key is enforced at two levels:

- **Lookup before insert.** A known key with the same body returns the original order (200); with a different body it returns 409.
- **Unique index as the final arbiter.** Concurrent requests with the same key can all miss the lookup. Only one insert can succeed against `IX_orders_IdempotencyKey`. A request that loses this race catches exactly that unique violation (PostgreSQL `23505` on that constraint, nothing broader), re-reads the winning order and answers as a replay or a conflict.

**What the code check found.** Before the fix, quantities 0, 2 and $-1$ and an empty product id were accepted as orders. When 20 requests with the same key were

sent at once, 6 to 9 of them returned HTTP 500: the unique index prevented duplicate rows, but the losing requests crashed. A replayed order also came back with different timestamps (no `Z`, different precision). On a fresh clone, an unknown order id returned 500 instead of 404, because ABP's themed error page needs website files that are not in the repository; the error page now applies only outside `/api`. `scripts/verify-order-api.ps1` fails 10 checks on the old code.

**Result after the fix** (`20261001T123816Z-order-api.log`, 30 of 30 checks):

- every validation case returns 400 with no row stored;
- a replay returns 200 with a body identical to the first response, and a changed body returns 409 with the original order unchanged;
- in three rounds of 20 concurrent same-key requests, each round gave exactly one 201 and nineteen 200s naming the same order, with one order row and one Outbox row;
- 200 concurrent requests over 50 keys (4 per key) produced exactly 50 orders and 50 Outbox rows, one 201 per key, and no key with more than one order in the table.

### 8.2.3 State management

`Entities/Order.cs` implements the state machine as guarded transitions (`Order.TransitionTo`). The current code has three legal transitions: `PendingStock` → `Confirmed`, `PendingStock` → `Rejected` and `Confirmed` → `Completed`. Every other pair throws `InvalidOrderStateTransitionException` and changes nothing. The adopted six-state model adds `Processing` (Section 7.5).

Result events are applied by `StockResultProcessor`:

- an event for the state the order is already in, with any `MessageId`, is acknowledged without a transition and recorded in the Inbox;
- an event for a state the order has already passed on `PendingStock` → `Confirmed` → `Completed` (for example `StockReserved` after `Completed`) is likewise acknowledged. Before the fix this case threw and would have been dead-lettered; it was found by a code check and fixed;
- a conflicting event (for example `StockRejected` after `Confirmed`) throws, nothing is recorded, and the consumer sends it to the dead-letter queue;
- an event for an unknown order is acknowledged and not recorded.

An `OrderProcessed` that arrives while the order is `PendingStock` used to be dead-lettered instead of retried. That was fixed in Week 9 (TP-M02): it is requeued until the order is `Confirmed`.

### 8.2.4 Test cases

| Case | What it shows | Status |
|---|---|---|
| TP-A01 | Intake returns 201 `PendingStock`; polling returns the order; unknown id is 404 | PASS |
| TP-A02 | 10 invalid requests (key, quantity, product, JSON) return 400 and store nothing | PASS |
| TP-A03 | Replay returns the identical original order | PASS |
| TP-A04 | Changed body returns 409; original unchanged | PASS |
| TP-A05 | Concurrent same-key retries: one 201, the rest 200, no 5xx | PASS |
| TP-A06 | Full $4 \times 4$ transition matrix; duplicate, stale, conflicting and unknown-order events | PASS |
| TP-A07 | 50 keys $\times$ 4 concurrent requests: exactly 50 orders and Outbox rows | PASS |

TP-A01–A05 and TP-A07 are run by `scripts/verify-order-api.ps1` against the running service. TP-A06 consists of the unit tests in `OrderStateBehaviourTests`. The whole unit suite passes, 43 of 43, in the saved run `tests/evidence/20261001T123816Z-unit-tests.trx`. `docs/test-plan.md` lists the inputs, expected outcomes and commands.

```
Passed!  - Failed: 0, Passed: 43, Skipped: 0, Total: 43
```

### 8.2.5 Event Publication Reliability: the dual-write problem and the Transactional Outbox

**The problem.** Once order creation needs to notify another service (Inventory Service) that stock should be reserved, the order write and the "notify" action become two separate operations against two separate systems (Postgres and RabbitMQ) that cannot be wrapped in one atomic transaction the way two SQL statements against the same database can. Naively sequencing them — write the order, then publish an event — exposes two distinct failure orderings, and

a system that only handles one of them is still broken. This is the dual-write problem that the Transactional Outbox pattern solves [25, 23]:

1. **The database commits but the publish fails.** The order now exists in `PendingStock` with no corresponding event ever sent. Nothing will ever move it out of `PendingStock` – it is silently stuck forever, and neither the client nor any operator has any signal that anything is wrong.
2. **The publish succeeds but the database transaction rolls back** (or the process crashes between the two steps). Inventory Service now receives an `OrderPlaced` event for an order that, as far as Order Service's own database is concerned, never happened. It may reserve real stock against a phantom order that no client will ever be able to query or complete.

Both failures share a root cause: two systems that must agree with each other are being updated as if they were one, with no mechanism enforcing that they actually end up agreeing.

**How the Outbox pattern eliminates both.** Rather than publishing directly, the order-creation handler writes two rows to *one* database – the `orders` row and a row in `order_service.outbox_events` recording that an `OrderPlaced` event needs to be published – inside the exact same `SaveChangesAsync` call (`Controllers/OrdersController.cs`). Because both rows are ordinary rows in the same relational database, Postgres's own transaction guarantee applies to both simultaneously: either both commit, or neither does. This directly closes both failure orderings above — there is no longer a window where the order exists without a corresponding pending event, or vice versa, because "the order exists" and "an event needs publishing" have been reduced to a single fact instead of two facts that could disagree.

This claim is verified directly, not just argued from the pattern's description, in `tests/FlashSale.OrderService.Tests/OutboxAtomicityTests.cs`: a real SQLite in-memory database (not a mock, and not EF Core's InMemory provider, which does not enforce relational constraints and so cannot demonstrate a rollback at all) is made to reject an outbox insert via a genuine primary-key collision, and the accompanying order insert is confirmed absent afterward — the whole transaction rolled back, not just the failing half.

```
Failed_outbox_insert_rolls_back_the_order_insert_too: PASS
Order_and_outbox_row_both_commit_in_one_SaveChanges_call: PASS
```

Both pass in the saved run `tests/evidence/20261001T123816Z-unit-tests.trx` (TP-E03).

**The same guarantee on the real database.** The unit test uses SQLite. `scripts/verify-outbox.ps1` repeats the check on PostgreSQL with Order Service running under its own account (`tests/evidence/20261001T163530Z-outbox.log`, 11 of 11 checks). A normal request stores exactly one order and one unpublished `OrderPlaced` row. With the Outbox `INSERT` privilege revoked for one request, the request failed and *no* order row existed afterwards. Once the privilege was restored, the same key created the order normally.

**Outbox workflow.** Writing the Outbox row only records that an event must be published. A background worker (`OutboxPublisherWorker`) reads unpublished rows, oldest first, 50 at a time, and publishes each stored payload. After a full batch that all published it reads the next batch at once; otherwise it waits 2 seconds (Section D). The event's `MessageId` is generated once, when the Outbox row is written, and stored in the payload, so every publish attempt for that row sends the same value. A failed attempt is retried after 1 s, 2 s and 4 s. After that the row stays unpublished and is tried again on the next poll, indefinitely, until it succeeds. The worker never crashes the host: a failed tick is logged and the loop continues. In the saved run, the broker was unreachable when the order was created. The publisher logged failed attempts and left the payload unchanged. Once a broker came up, exactly one message arrived, carrying the `MessageId` stored at commit time.

**Routed confirmation.** A row is marked published only when the broker has confirmed the message *and* delivered it to every queue that must receive it (`docs/outbox.md`). A code check found that this was not true. All three publishers (both Outbox publishers and the Process Worker's) used `mandatory: false`, so a message with no matching binding was silently dropped, yet confirmed and marked published. The prototype reproduced it: an `OrderPlaced` published before any queue was bound was marked published and reached nobody. A second gap is subtler. `StockReserved` must reach two queues, Order Service's and the Process Worker's. If only one was bound, the broker accepted the message while the Process Worker never saw it.

The fix is the same in all three publishers. The queues each event must reach are configured per event (`RequiredSubscriberQueues`: `OrderPlaced` → `OrderPlaced`; `StockReserved` → `StockReserved` and `ProcessWorker.StockReserved`; `StockRejected` → `StockRejected`; `OrderProcessed` → `OrderProcessed`). Before each publish, every required queue is checked with a passive declare, which fails if it does not exist, and is then bound to the exchange; binding is idempotent. The message is published with `mandatory: true` on a channel with publisher con-

firmations and tracking. `BasicPublishAsync` then throws on a nack or a return. Any exception leaves the row unpublished, and an event type with no configured queues is refused. The consumers still own their queues; the publisher never creates one.

**Failure scenarios.** `scripts/verify-publication.ps1` runs each scenario against a throwaway broker (`tests/evidence/20261001T163055Z-publication.log`, 18 of 18 checks). On the old publishers, 8 of its checks fail: the affected messages were marked published but were never delivered.

| Scenario | Observed with the fix | Old code |
|---|---|---|
| Valid route | Published; one message in the queue | Same |
| Required queue missing | Row stays unpublished, retries logged; once the queue exists (even unbound) it is delivered once and the binding is restored | Marked published, message lost |
| Binding removed | Binding restored; delivered once | Marked published, message lost |
| Broker stopped, then restarted | Orders still accepted; row unpublished while down; delivered once after restart | Marked published, message lost |
| Full queue (`reject-publish`) | Second message nacked and left unpublished; delivered once after space freed | Same (a nack was already detected) |
| Unroutable message | `PublishException` with `IsReturn = true` (broker probe) | No exception |
| `StockReserved`, Process Worker queue missing | Not published, nothing sent to the other queue; once both exist, one copy in each | Marked published, Worker copy lost |
| `OrderProcessed` queue missing | Worker retries, then dead-letters its `StockReserved`; once the queue exists, one `OrderProcessed` with `MessageId = OrderId` | Not run on the old code |

In every recoverable case the event arrived exactly once after the fault was removed, without manual intervention. A Process Worker event that cannot be published is not lost: it lands in the worker's dead-letter queue, and recovering

it from there is the subject of the failure handling (Section 8.6). ABP's own RabbitMQ event bus was not used for publishing because its options expose no documented way to enable publisher confirms; the raw `RabbitMQ.Client` 7.1.2 package is used instead.

## 8.3 Inventory Service

### 8.3.1 Scaffolding

Inventory Service was scaffolded with a minimal ABP module set (MVC, Autofac, EntityFrameworkCore.PostgreSql, Swashbuckle, Serilog). It has none of the identity, account, permission, tenant, setting or OpenIddict modules that Order Service carries from the default template: the scope lock excludes user management, authentication and multi-tenancy, so Inventory Service never adds them. It owns only the `inventory_service` schema (Section 7.7) and the Redis inventory keys. The behaviour below is specified in `docs/inventory.md`. Every result in this section comes from saved runs on a fresh clone with throwaway Redis, RabbitMQ and PostgreSQL instances (`tests/evidence/20261002T051418Z-inventory.log` and `20261002T052244Z-cross-store.log`).

### 8.3.2 Redis key and data design

| Key | Type | Meaning |
|---|---|---|
| `inventory:{productId}` | integer | Units still available |
| `processed:{productId}` | set | Order ids that hold a reservation for this product |
| `sale:open:{productId}` | string | Present only after a confirmed warm-up: the sale is open |

Stock lives only in Redis for the asynchronous design. The per-product reservation set lets the duplicate check happen inside Redis, in the same atomic step as the stock change, without consulting PostgreSQL.

### 8.3.3 Lua reservation logic

`scripts/redis/reserve.lua` runs as one atomic `EVAL`: Redis executes a script without interleaving any other command, so the check-then-act sequence below cannot race. The C# side (`InventoryReservationService`) only loads the file and passes keys and arguments; it does not reimplement any of the logic.

```
-- KEYS: inventory:{id}, processed:{id}, sale:open:{id}   ARGV: order_id
if redis.call('SISMEMBER', KEYS[2], ARGV[1]) == 1 then return 'DUPLICATE' end
if redis.call('EXISTS', KEYS[3]) == 0 then return 'NOT_OPEN' end
local stock = tonumber(redis.call('GET', KEYS[1]))
if stock == nil or stock <= 0 then return 'REJECTED' end
redis.call('DECR', KEYS[1])
redis.call('SADD', KEYS[2], ARGV[1])
return 'RESERVED'
```

The duplicate check comes first, so a redelivered order that already holds a unit is answered `DUPLICATE` even if the sale has since closed. Inventory Service maps `RESERVED` and `DUPLICATE` to `StockReserved`, and `REJECTED` and `NOT_OPEN` to `StockRejected`.

### 8.3.4 Inventory warm-up and readiness

The teacher brief requires that a product opens for sale only after warm-up is complete *and confirmed*. A code check found no such gate. An un-warmed product was answered `REJECTED` exactly like a sold-out one, and nothing recorded whether warm-up had happened.

`scripts/warm-up.ps1` now handles each product in one atomic Lua step. It sets the stock, clears the reservation set and sets `sale:open:{productId}`. It then confirms the product by reading all three back, prints `CONFIRMED` per product, and exits non-zero if any product does not confirm. Until the marker exists, `reserve.lua` answers `NOT_OPEN` and touches no stock. Re-running warm-up on a product whose sale is open is refused, because it would restore stock and forget reservations mid-sale. `-Force` exists for experiment resets only.

In the saved run, a reservation attempted before warm-up answered `NOT_OPEN` with the stock untouched. Warm-up confirmed all six test products. A re-run on an open sale was refused (stock stayed at its post-sale value) and `-Force` reset it. End to end through the running Inventory Service, an `OrderPlaced` for a never-warmed product produced `StockRejected` with no Redis key created, and one for a warmed product produced `StockReserved`.

### 8.3.5 Inventory invariants under concurrency

For every product, after any amount of concurrent traffic (`docs/inventory.md`): (1) `inventory` $\geq 0$; (2) reservations $\leq$ initial stock; (3) `inventory` + reservations $=$ initial stock (every unit is either available or held by exactly one order); (4) no order id is reserved twice, and a repeated order id is answered `DUPLICATE`

only if that order already holds a unit. `tests/InventoryProbe` drives the real `reserve.lua` with all requests in flight at once and checks these per product:

| Workload | Requests | Reserved | Duplicate | Rejected |
|---|---|---|---|---|
| Hot product: 100 units; 300 orders + 100 repeats | 400 | 100 | 52 | 248 |
| 4 products: 40/30/20/10 units; demand 50/25/15/10 %; 250 orders + 80 repeats | 330 | 100 | 45 | 185 |

All four invariants held for every product in both workloads. The number of `RESERVED` answers equalled the reservations recorded in Redis, and equalled $\min(\text{distinct demand}, \text{stock})$ for every product. Stock ended at exactly zero wherever demand exceeded supply. The probe also fails when it should: run before the sale was open, every request answered `NOT_OPEN` and the conservation checks failed.

### 8.3.6 OrderPlaced handling and the Redis/PostgreSQL boundary

`OrderPlacedConsumer` consumes with manual acknowledgement. `OrderPlacedProcessor` checks the Inbox, runs `reserve.lua`, then writes the result event to its Outbox and the Inbox row in one PostgreSQL transaction. Only after that commit is the message acknowledged. A processing error is retried after 1 s, 2 s and 4 s, and then the message is dead-lettered (`OrderPlaced.dlq`), never re-queued in a loop.

**PostgreSQL failure after the Redis reservation.** Redis and PostgreSQL cannot share a transaction, so the design makes Redis the decision and PostgreSQL the record (Section 7.7). The cross-store test (`scripts/verify-cross-store.ps1`) revokes the Outbox `INSERT` right after `reserve.lua` has run. On the old code the consumer caught *every* database error as "a duplicate already recorded this" and acknowledged the message. The `StockReserved` result was then lost for good while the unit stayed reserved, and 5 of the test's 11 checks failed. The processor now treats only a unique-key violation (PostgreSQL `23505`) as a duplicate; any other error propagates to retry and the dead-letter queue. With the fix (11 of 11 checks):

- **Short outage.** The privilege is restored inside the retry window. The retry reached `reserve.lua` again, got `DUPLICATE`, and wrote `StockReserved`. Stock was deducted exactly once.
- **Long outage.** The retries were exhausted and the message went to `OrderPlaced.dlq` with no Inbox row and no result. After the fault was removed, replaying the dead letter rebuilt `StockReserved`, again with exactly one deduction.

Order Service's `StockResultProcessor` had the same catch-all; it was closed when the stock results were added (TP-W03).

## 8.4 Stock Results and Order State

The Outbox and the Inventory Service build one direction of the pipeline: an order becomes an `OrderPlaced` event, which Inventory Service reserves against Redis. This section builds the return direction – Inventory Service telling Order Service what happened, and Order Service acting on it – which is what actually lets an order leave `PendingStock`.

### 8.4.1 Inventory Service's own Outbox – a harder dual-write problem

Order Service's Outbox writes a business row and an outbox row to the *same* Postgres database in one transaction, so atomicity is free. Inventory Service cannot do that: the business fact (stock was reserved) is recorded in Redis by `reserve.lua`, and the outbox fact (tell Order Service) must be recorded in Postgres – two different data stores that cannot share a transaction. Rather than accept a gap where a process crash between the two writes silently drops the notification, Inventory Service gets its own `outbox_events` table (`inventory_service` schema) with one deliberate difference from Order Service's: the unique index is on `OrderId`, not `Id`.

That difference is what makes the Lua script's `DUPLICATE` outcome safe. `DUPLICATE` means a *previous* delivery of the same `OrderPlaced` message already reserved the stock in Redis – so if the consumer treated it as a no-op, a redelivered message would never produce a `StockReserved` row, and that order would sit in `PendingStock` forever despite the reservation having genuinely succeeded. Instead, both `RESERVED` and `DUPLICATE` run the same step in `OrderPlacedProcessor`: check whether an outbox row for this `OrderId` already exists, and only insert

if it doesn't. The unique index turns a possible race between two redeliveries into a unique violation, which is caught, rather than a duplicate row – "ensure exists", not "insert unconditionally". The Inventory Service `RabbitMqOutboxPublisher` and `OutboxPublisherWorker` use the same design as Order Service's versions (raw `RabbitMQ.Client`, routed confirmation, 2s poll interval).

### 8.4.2 Order Service: consuming the result

`StockResultConsumer` consumes two queues, `StockReserved` and `StockRejected`. Each queue has its own dead-letter queue. Both queues share one handler, which calls `StockResultProcessor` with the target state. The processor works in this order:

1. Check the Inbox. If the `MessageId` has already been processed, acknowledge and stop.
2. Look up the order. If it does not exist, acknowledge and stop.
3. If the order is already in the target state, or has moved past it on the happy path, record the Inbox row and treat the message as a no-op.
4. Otherwise call `Order.TransitionTo` and add the Inbox row. Both are committed by one `SaveChangesAsync`.

The message is acknowledged only after that commit. Failures are handled in three ways:

- **Conflicting result.** For example, `StockReserved` for a `Rejected` order. This is not transient, so it is dead-lettered at once.
- **Database error.** It is retried after 1, 2 and 4 seconds, then dead-lettered. Only a unique violation counts as a concurrent duplicate (TP-W01, TP-W03).
- **`OrderProcessed`.** The Process Worker's event is handled by `OrderProcessedConsumer`. It reuses the same processor with the target state `Completed`.

### 8.4.3 Automated correctness validation

`scripts/validate-correctness.ps1` checks the four inventory invariants for one product after a run, with separate rules for C1 and C2 (`docs/validation.md`). It takes the configuration, product id and initial stock as parameters, so the experiments reuse it unmodified.

**What the code check found.** The earlier validator gave false passes. It could not validate C1 at all, because it read Redis and the asynchronous `orders` table while C1 lives in `order_service.inventory` and `baseline_orders`. Two of its four checks could never fail. Invariant 3 counted duplicate order *primary keys*, which the primary key forbids. Invariant 4 counted duplicate `MessageIds` in `processed_messages`, which its unique index forbids. On a fixture where 3 units were taken for 2 reserved orders (a double deduction), the old validator printed `PASS` for all four invariants and exited 0. The validator results shown in earlier drafts of this report were produced by that version, and their invariant 3 and 4 lines are therefore not evidence.

**Rules.** For C1: stock $\geq 0$; Confirmed decisions $\leq$ initial; units taken (initial $-$ stock) $=$ Confirmed decisions, so every deduction has exactly one logged decision. Invariant 4 is reported `NOT APPLICABLE` with its reason, because C1 has no broker messages. For C2: Redis stock $\geq 0$; both Redis reservations and successful orders $\leq$ initial. The Redis reservation set and the successful orders must be exactly the same order ids (one reservation per order). Units taken must equal distinct reserved orders (no double deduction), and the Inbox `MessageId` uniqueness must exist in both services. A run with no data, or with a reserved order still `PendingStock`, is `INCONCLUSIVE`; an unreachable store or a failed query is `SETUP ERROR`. Both exit non-zero, so nothing unchecked is ever reported as a pass. C3 is validated from the same evidence as C2, and a fifth check accounts for every accepted order: each order row is either terminal (`Completed`, `Rejected`) or outstanding (`PendingStock`, `Confirmed`, `Processing`), and the two add up to the orders accepted. An outstanding order makes the check `INCONCLUSIVE` and is listed with its age and re-publish count, so no accepted order can go unnoticed. The broken-fixture test now also covers check 5 under C3 (16 of 16 checks, `tests/evidence/20261020T030140Z-validator.log`).

**Evidence** (fresh clone; `tests/evidence/20261002T062442Z-validator.log` and `20261002T062442Z-real-runs.log`). `scripts/verify-validator.ps1` feeds the validator correct C1 and C2 fixtures, which pass, and one broken fixture per failure mode: oversold stock, a deduction without a logged decision, a reservation/order mismatch, a double deduction, an unsettled run, missing data and an unreachable database. Each broken fixture fails the targeted invariant or is reported `INCONCLUSIVE` or `SETUP ERROR` (12 of 12 checks). `scripts/verify-real-runs.ps1` then validates two real runs.

- **C1:** 30 concurrent requests against 20 units. All four invariants hold: stock 0, 20 Confirmed.

- **C2:** Order Service, Inventory Service and the Process Worker running together. 30 orders plus 10 client retries against 20 units settled as exactly 30 orders: 20 `Completed` and 10 `Rejected`. The Redis reservation set and the 20 successful orders were the same order ids, and stock was 0.

While this script was being developed, a second run reused a product id whose orders were still in the database from the first run. The validator correctly failed it, because the successful orders exceeded the stock that had been re-seeded into Redis.

### 8.4.4 The main workflow

`docs/workflow.md` describes the one business workflow, placing an order, from the code. Its steps are the numbered arrows of Figure 7.7. The order is accepted when its row commits, so the client receives `201 Created` with `PendingStock`. All later steps run asynchronously, and every consumer acknowledges only after its own transaction commits. Table 8.1 lists each step with its failure branch.

The workflow run on a fresh clone (TP-W04), its code-check findings and its negative control are in Appendix B.2.

## 8.5 Reliability and Idempotency

### 8.5.1 Message delivery semantics

RabbitMQ delivers at-least-once [17]. A message is removed from its queue only when the consumer acknowledges it. If the consumer dies first, or its connection drops, the broker delivers the same message again. Duplicates therefore cannot be avoided at the transport. The system's goal is the next best thing: every side effect happens effectively once, however many times a message arrives. This is the Idempotent Consumer pattern [24, 10].

Two kinds of duplicate have to be absorbed, by two different layers.

- **Transport duplicates.** The same broker message (same `MessageId`) arrives again, for example after a crash or a connection loss. The *Inbox* absorbs it. Each service has a `processed_messages` table with a unique index on `MessageId`, created by the `AddProcessedMessages` migration of each service.
- **Business duplicates.** The same fact arrives under a *new* `MessageId`. The reconciliation job does exactly this when it re-publishes `OrderPlaced`. The Inbox cannot see these, because the `MessageId` is new. Business rules absorb them instead:

| Steps | What happens | If it fails | Test |
|---|---|---|---|
| 1–4 | Validate; look up the `Idempotency-Key`; insert the order and its `OrderPlaced` Outbox row in one transaction; answer `201`. | `400`/`409`, or a replay answered `200`; a refused Outbox insert leaves no order. | A01–A07, O01 |
| 5–9 | Every 2 s, publish up to 50 unpublished rows (oldest first) after checking queue `OrderPlaced`; mark published after the routed confirm. | Not marked published; retried after 1, 2, 4 s, then next poll; same `MessageId`. | O01, O02 |
| 10–15 | Inventory checks its Inbox, runs `reserve.lua`, then writes the result's Outbox row and its Inbox row in one transaction, then acks. | Retried, then dead-lettered; a replay gets `DUPLICATE`, so there is no second deduction. | I01–I03 |
| 16–20 | Publish `StockReserved` (queues `StockReserved` and `ProcessWorker.StockReserved`) or `StockRejected`. | As for steps 5–9. | O02 |
| 21–23 | Order Service: Inbox check, `PendingStock` to `Confirmed/Rejected` and the Inbox row in one transaction. | Retried, then dead-lettered; a conflict is dead-lettered at once. | W01, W03 |
| 24–27 | Process Worker: fixed 200 ms delay, publish `OrderProcessed` with `MessageId` = `OrderId`. | Retried, then dead-lettered; a redelivery republishes the same `MessageId`. | P01 |
| 28–30 | Order Service: `Confirmed` to `Completed` with the Inbox row in one transaction. | If the order is still `PendingStock`: requeued (2, 4, 8 s), then applied. | W04, M02 |
| 31–32 | `GET /api/orders/{id}` returns the state. | `404` for an unknown id. | A01 |

**Table 8.1.** – Steps of the main workflow (test case ids without the `TP-` prefix).

| Consumer | Inbox | One local transaction | Acknowledged |
|---|---|---|---|
| Inventory: `OrderPlacedConsumer` | Inventory's | result Outbox row (one per order) and Inbox row | after the commit |
| Order: `StockResultConsumer` | Order Service's | state change and Inbox row | after the commit |
| Order: `OrderProcessedConsumer` | Order Service's | `Confirmed`→`Completed` and Inbox row; an early completion writes nothing and is requeued | after the commit, or after the confirmed requeue |
| Process Worker: `StockReservedConsumer` | no Inbox (no database) | none: it only publishes `OrderProcessed` with `MessageId` = order id | after the confirmed publish |

**Table 8.2.** – Every consumer, its Inbox, its local transaction and when it acknowledges (`docs/delivery-semantics.md`).

- Redis's `processed:{product}` set makes the Lua script answer `DUPLICATE` for an order that already holds a unit;
- Inventory's result Outbox has one row per order id;
- Order Service treats a result for a state the order already has, or has passed, as a no-op.

Table 8.2 lists every consumer. Only a PostgreSQL unique violation (23505) is treated as "already processed". Any other database error is retried and then dead-lettered, so a failed write is never acknowledged as done (TP-W03).

The Process Worker has no Inbox because it writes nothing locally. A redelivered `StockReserved` makes it publish the same `OrderProcessed` again, with the same `MessageId`. Order Service's Inbox then absorbs that copy.

### 8.5.2 Idempotent consumer

The correctness logic lives in two small classes that a test can drive directly. `OrderPlacedProcessor` serves Inventory Service, and `StockResultProcessor` serves both Order Service consumers. The consumer classes around them only deserialize, retry, and acknowledge or reject. Each processor works in this order:

1. **Check the Inbox.** If the `MessageId` is recorded, report "already processed" and touch nothing. In Inventory Service this check runs before the Lua script, so an exact redelivery never reaches Redis.

2. **Decide.**
   - Inventory runs the Lua reservation.

- Order Service compares the order's state with the result. A result for the same or an earlier state on the happy path (for example a late `StockReserved` after `Completed`) is a no-op. A completion that arrives while the order is still `PendingStock` returns `NotYetApplicable`: it writes nothing and the consumer requeues it. Any other mismatch is a genuine conflict, which throws and is dead-lettered.

3. **Commit once.** The business change (Inventory's result Outbox row, or Order Service's new state) and the Inbox row are added to one `DbContext`. One `SaveChangesAsync` commits both, so either both happen or neither does.

4. **Absorb the race.** Two deliveries can pass step 1 together. The unique index then rejects the second insert, and that unique violation, and only that one, is reported as "already processed".

`Order.TransitionTo` has no self-loop for `Confirmed` or `Rejected`. That is why the processor detects "already in this state" itself. Otherwise a legitimate redelivery would throw the same exception as a genuine conflict, and the two would be indistinguishable.

The local transaction was tested directly (TP-M01). With `INSERT` on the Inbox revoked, the business write rolled back with it in both services, the message was retried and then dead-lettered, and a replay applied it once.

### 8.5.3 Acknowledgement strategy, proven with a real crash

Every consumer follows the same rule (`docs/delivery-semantics.md`):

1. Check the Inbox.

2. Do the business step and insert the Inbox row in one local transaction.

3. Acknowledge only after that transaction commits (`autoAck: false`).

The dangerous moment is between the commit and the ack. If the process dies there, the work is done but the broker still holds the message, so it delivers it again.

**What the code check found.** An earlier draft of this section described a manual crash test. Its output was never saved, and it killed Inventory Service *before* it processed the message. That shows an unprocessed message is redelivered. It does not test the case this step is about: a crash *after* the commit.

**Fault injection.** Each of the four consumers now calls a fault-injection hook, `CrashBeforeAckIfTargeted`, between its commit and its ack:

- Inventory's `OrderPlaced` consumer;
- Order Service's stock-result consumer;
- Order Service's `OrderProcessed` consumer;
- the Process Worker.

The call does nothing unless two test settings name the consumer and one correlation id. Neither setting is present in any `appsettings.json`. When both match, the process kills itself (`Process.Kill`), with no graceful shutdown that could still acknowledge the message. Targeting one correlation id leaves all other traffic untouched.

**Process Worker.** The Process Worker has no database and therefore no Inbox. Its only effect is publishing `OrderProcessed` with `MessageId` equal to the order id. A redelivered `StockReserved` makes it publish the same message again, and Order Service's Inbox absorbs the copy.

**Evidence** (TP-M01; fresh clone and fresh database; saved as `20261002T183238Z-delivery.log` in `tests/evidence/`). `scripts/verify-delivery.ps1` passes 34 of 34 checks on the three services, a throwaway RabbitMQ and Redis, and PostgreSQL.

- **Inbox uniqueness.** Both `processed_messages` tables have a unique index on `MessageId`. A second row with the same `MessageId` is refused as a unique violation for each service's own database account.
- **Local transaction.** With `INSERT` on the Inbox revoked, the business write rolled back with it in both services: Inventory wrote no result Outbox row, and the order stayed `PendingStock`. The message was retried, then dead-lettered. After the privilege was restored, replaying the dead letter applied the message once, and Redis deducted one unit only.
- **Crash after commit, before ack, for each consumer.** The process was gone and its work was committed: the Inbox row, plus the Outbox row and Redis deduction (Inventory) or the new state (Order Service). The unacknowledged message was back in its queue. After a restart, the same `MessageId` was redelivered and acknowledged as already processed. For the Worker, `OrderProcessed` was published again and absorbed by Order

Service. Each order still had one Inbox row per message, and its decision and completion timestamps were unchanged.

- **End state.** Six orders took six of ten units, Redis recorded exactly those six orders, and every queue and DLQ was empty.

**Negative controls.** To rule out a false pass, the same run was repeated twice, each time with one deliberate break in Inventory Service.

- **The consumer acknowledged before processing.** The crashed message was not redelivered. The run failed 24 of its 34 checks: acknowledged messages were lost, and the orders behind them never settled.
- **The Inbox check was skipped.** The redelivery was no longer recognised as already processed (exactly one check failed). The Lua script's `DUPLICATE` answer still prevented a second deduction, which shows that Inventory is protected by more than one layer.

### 8.5.4 Duplicate handling

Duplicates are handled at three levels, and each level has its own test.

- **Unit level.** `DuplicateMessageIdempotencyTests` drives `StockResultProcessor` on a real SQLite engine, because the unique index is the thing under test and EF Core's in-memory provider does not enforce it. The tests cover:
  - a redelivered message, which is a no-op with one Inbox row;
  - two different messages for an order already in its target state, which are both absorbed;
  - a genuine conflict, which throws and records nothing;
  - an early completion, which is not applied and not recorded, and is then applied exactly once after `StockReserved`.

  The suite has 45 tests, and all pass in `tests/evidence/20261003T181814Z-unit-tests.log`.
- **Crash and redelivery.** A consumer killed after its commit and before its ack replays safely (Section above, TP-M01).
- **Concurrent, business-level and out-of-order duplicates.** These are covered on the running system, as described below (TP-M02).

An earlier draft showed the old validator reporting all four invariants as PASS on the state left by a crash test. That validator's invariant 3 and 4 checks could not fail (Section 8.4.3), so the output was withdrawn. The crash case is now covered by TP-M01 above.

### 8.5.5 Concurrent duplicates and out-of-order completion

Three ordering risks remain once each consumer has an Inbox:

- many copies of one message arriving at the same moment;
- the same business fact arriving again under a new `MessageId` (the reconciliation job does exactly this);
- a completion arriving before the result it depends on.

**What the code check found.** The third case was the open gap of Section 7.7. The Process Worker and Order Service both consume `StockReserved` in parallel. So `OrderProcessed` could reach Order Service while the order was still `PendingStock`. The transition to `Completed` was then illegal, so the message was dead-lettered and the completion was lost. `scripts/verify-design-decisions.ps1` still asserted this defective behaviour, and `docs/order-state-machine.md` described a retry that did not exist in the code.

**Fix.** `StockResultProcessor` has a new outcome, `NotYetApplicable`, for exactly this case. It writes nothing, not even an Inbox row, so the message can still be applied later. `OrderProcessedConsumer` then:

1. republishes the message onto a delayed retry queue (`OrderProcessed.retry.1`–`3`, with TTLs of 2, 4 and 8 s, each bound to the dead-letter exchange);
2. uses a channel with publisher confirms for that publish;
3. acknowledges the original only after the confirm.

Each retry queue dead-letters back onto `OrderProcessed`, and the completion is applied once the order is `Confirmed`. If it is still early after three requeues, it goes to the DLQ instead of waiting forever. The 1, 2, 4 s in-process retry for database errors is unchanged and kept separate.

**Evidence** (fresh clone of `b0b9d51` and fresh database; saved as `20261003T181814Z-delivery-ordering.log` in `tests/evidence/`). The verifier, `verify-delivery-ordering.ps1` in `scripts/`, passes 44 of 44 checks:

- **Concurrent duplicates.** Eight simultaneous deliveries of one `StockReserved` confirm the order once, with one Inbox row and none dead-lettered. Eight simultaneous deliveries of the same fact under eight `MessageIds` also confirm it once: all eight are recorded in the Inbox, none is dead-lettered, and the decision time is never re-stamped.
- **A new `MessageId` for the same fact.** A re-published `OrderPlaced` makes Redis answer `DUPLICATE`. No second unit is taken, and there is no second result Outbox row. A duplicate `StockReserved` is a no-op that is not dead-lettered.
- **Early completion.** `OrderProcessed` is requeued onto a bound retry queue, not dead-lettered, and writes no Inbox row while it is unapplied. It is applied exactly once after `StockReserved` lands. An orphan completion with no `StockReserved` is requeued three times, then dead-lettered.
- **Late result.** A `StockReserved` after `Completed` is a no-op, and both timestamps are unchanged.

Every order took one unit at most, and every run queue, retry queue and result DLQ ended empty.

In the same fresh clone, the earlier checks still pass: TP-M01 (34/34), TP-W04 (62/62), TP-W01 (10/10) and the unit tests (45/45 at the time, including two new tests for the early case; 98 on the final code, Section D).

**Negative control.** The fix was reverted in a scratch copy and the run repeated on a fresh database. 16 checks failed: the retry queues did not exist, the early completion was dead-lettered, and that order never reached `Completed`.

## 8.6 Failure Handling and Recovery

The reliability layer made every individual message idempotent. This section handles the failures *around* that idempotency: a handler that throws, a message nobody can ever process, and an order that slips through every other net. The mechanisms are bounded retry, a dead-letter queue per service, and a reconciliation safety net. The chapter ends with the failure model: which failures are verified, which are only designed, and which are not supported. Following the

teacher brief, payment failure, compensation, Redis Cluster, RabbitMQ Cluster, PostgreSQL replication and multi-region deployment are out of scope.

### 8.6.1 Classify, then retry a bounded number of times

A failure is classified before it is retried (`docs/failure-handling.md`). There are three classes:

- **Transient**, such as a brief database outage or a missing queue: retried.
- **Permanent (poison)**: never retried.
- **Business rejection**, a genuine state conflict: a decision, not something to retry.

Retry is implemented directly in each of the four consumers. These are Inventory's `OrderPlacedConsumer`, Order Service's `StockResultConsumer` and `OrderProcessedConsumer`, and the Process Worker's `StockReservedConsumer`. ABP's RabbitMQ event bus is not used (Section 8.2.5).

All four use the same in-process ladder as `OutboxPublisherWorker`: four attempts, with 1 s, 2 s and 4 s waits. After the fourth attempt the consumer logs an error and nacks the message without requeue, so the message is dead-lettered with its body intact rather than looping forever. Retrying the whole processing call is safe because every processor is idempotent (Section 8.5): a retry that follows an attempt which had in fact succeeded sees the Inbox row and returns cleanly. Only a PostgreSQL unique violation (23505) counts as "a concurrent duplicate already recorded this". Every other database error is retried and then dead-lettered.

The two non-transient classes skip the ladder entirely:

- **Business rejection.** `InvalidOrderStateTransitionException` is deterministic, so retrying it would reproduce the same conflict four times. It is nacked to the DLQ at once.
- **Permanent (poison).** Each consumer validates the message's identity fields straight after deserialization, before any Redis, SQL or Inbox work. An empty `MessageId`, `OrderId` or `ProductId` is permanent (`OrderProcessed` carries no `ProductId`). So is an `OrderPlaced` whose `Quantity` is not 1, because the reservation scope is exactly one unit. Such a message is nacked without requeue after one attempt, and the consumer logs `Invalid <Event> message: <Field> is empty; routing to DLQ`.

The validation fixed a real bug, not just a gap. Before it, an `OrderPlaced` with an empty `MessageId` was processed as if it were real. The Inbox then recorded

`Guid.Empty`, so a *second, different* invalid message was wrongly skipped as "already processed".

### 8.6.2 A dead-letter queue per service, and replay

Every main queue declares `x-dead-letter-exchange=flashsale.dlx`. That exchange routes each dead letter into exactly one service's DLQ:

- `OrderPlaced.dlq` for Inventory;
- `StockReserved.dlq`, `StockRejected.dlq` and `OrderProcessed.dlq` for Order Service;
- `ProcessWorker.StockReserved.dlq` for the Worker.

The Worker's queue also rewrites the dead-letter routing key. `flashsale.dlx` is a direct exchange shared by all three services. Without the rewritten key, a Worker dead letter (original key `StockReserved`) would be copied into Order Service's `StockReserved.dlq` as well. The rewrite keeps each DLQ limited to its own service's failures.

A DLQ repairs nothing by itself, so it has a documented owner and replay procedure:

1. Inspect the dead letter. Its `x-death` header names the source queue and the reason.
2. Fix the root cause.
3. Republish the message unchanged, so it keeps the same `MessageId`.

The Inbox, and `reserve.lua`'s `DUPLICATE` answer, make the replay apply exactly once.

**Verification (TP-F01).** `scripts/verify-failures.ps1` runs all three services on a throwaway broker and Redis. For each of the four consumers it checks four things:

- **Transient fault.** A revoked Inbox `INSERT`, or a deleted queue for the Worker, is restored inside the window. The message is applied once and nothing is dead-lettered.
- **Exhausted retries.** A fault that outlasts the ladder produces exactly four attempts, about 1 s, 2 s and 4 s apart according to the log timestamps. The message is then in that service's DLQ, with `x-death` reason `rejected`. The main queue is empty and every other DLQ is unchanged.

- **Poison.** Malformed JSON, an empty `MessageId` (two different such messages) and `Quantity` = 2 are each dead-lettered after one attempt. None leaves an Inbox row or a Redis effect.
- **Replay.** The dead letter, republished unchanged, applies exactly once.

The fresh-clone run passed all 74 checks (`tests/evidence/20261011T084521Z-failures.log`). A negative control disabled the Inventory empty-`MessageId` check. Five checks then failed and the script exited 1 (saved alongside it as `...-failures-negative.log`), which shows the poison checks have teeth. The delivery regressions still pass on the same clone: TP-M01 34/34, TP-M02 44/44, and the workflow and stock-result verifiers.

### 8.6.3 Reconciliation: stuck orders, a bound and an alert

Retries and the DLQ deal with *messages*. Reconciliation is the safety net for *orders*: it finds an order that is still `PendingStock` long after it should have been answered, and acts in a bounded, visible way. It does not replace the Outbox, retry or the DLQ, and it never changes an order's state to hide a problem (`docs/failure-handling.md`).

**Detection and cadence.** `ReconciliationWorker` (Order Service) polls on a configurable interval (30 s by default). It looks for orders still `PendingStock` whose request was accepted longer ago than a configurable timeout (also 30 s by default). For each one it inserts a fresh `OrderPlaced` Outbox row, which re-runs the normal pipeline. It acts on an order at most once per timeout window, so a stuck order is not re-triggered on every poll.

**The bound and the alert.** The attempt count comes from the order's own `OrderPlaced` Outbox rows: the first row is the original delivery, and every later row is one re-trigger. Because the count lives in the database, it survives an Order Service restart. An order is given up only when two things are both true: the count has reached `MaxAttempts` (3), and the last re-trigger has had its full window to work. A given-up order:

- is no longer re-triggered;
- produces one Error log line naming the order, its attempts and its age;
- stays `PendingStock`, because no `Rejected` is invented;
- is counted in three Prometheus metrics: re-triggers, orders given up, and orders currently stuck.

**Recovering a known outcome.** Before this change, a re-trigger often could not recover anything. Suppose Inventory had already published a result and Order Service lost it, for example because it was dead-lettered and the DLQ was purged. Inventory then saw that a result row existed and wrote nothing, so the order stayed stuck while being re-triggered forever. Now a re-triggered `OrderPlaced` for an order whose result was already published re-sends that *same stored result*: the same payload and the same `MessageId`. There is no second Lua deduction (`reserve.lua` answers `DUPLICATE`) and no new row. Order Service's Inbox applies the result once, or ignores it if it was already applied. A reserved order therefore stays reserved and is never rewritten as out of stock.

The operator procedure is in `docs/failure-handling.md`: inspect the order, its Outbox rows and the DLQs; fix the cause; then replay the dead letter unchanged. Stock is never reset and queues are never deleted as a "repair".

**Verification (TP-F02).** `scripts/verify-reconciliation.ps1` runs all three services with short timeouts (5 s, a 2 s poll, a bound of 3). It covers six cases:

- **A, lost result.** A reserved order's `StockReserved` is dead-lettered and the DLQ purged. Reconciliation re-triggers it, and Inventory re-sends the stored result, whose `PublishedAt` is re-stamped after the purge. The order ends `Completed`, with one deduction, one result row and the *original* result `MessageId`.
- **B, transient outage.** Inventory is stopped, three orders are placed, and only Inventory is restarted. All three drain to `Completed` with one deduction each, and none is `Rejected`.
- **C, permanent fault.** With Inventory kept down, the order is re-triggered exactly three times. The give-up Error is logged exactly once, and the metrics read 3 re-triggers, 1 given up and 1 stuck. The order stays `PendingStock`.
- **D, Order Service restart.** The restarted service resumes from the stored count. It stops at the bound and does not start again from zero.
- **E, no false positive.** A normally completed order is never re-triggered.
- **F, outcome preserved.** When Inventory returns, the given-up orders from C and D complete with exactly one result each. The stuck gauge returns to 0, and the stock is conserved: 20 units minus 7 orders leaves 13.

A fresh-clone run passed all 30 checks (`tests/evidence/20261011T102304Z-reconciliation.log`). A negative control removed the Inventory re-send. Case A then stayed `PendingStock` with its result never re-sent, and the script exited 1.

**Confirmed and Processing (after the review).** Reconciliation first watched `PendingStock` only, so an order whose Process Worker copy of `StockReserved`, start event or completion was lost stayed `Confirmed` or `Processing` for ever. It now also selects those orders once their confirmation is older than `ProcessingStuckTimeoutSeconds` (300 s by default, never shorter than the `PendingStock` timeout, because the Worker's queue legitimately holds confirmed orders after an overload). The same re-trigger recovers them: Inventory re-sends its stored `StockReserved`, which also reaches the Worker. Case G stops the Worker, lets an order be confirmed, purges the Worker's copy and restarts the Worker; the order ends `Completed` with one deduction, and all 35 checks pass (`tests/evidence/20261023T142609Z-reconciliation.log`). With the new selection removed, case G fails: the order stays `Confirmed` (`tests/evidence/20261023T143020Z-reconciliation-negative-control.log`).

### 8.6.4 Supported and unsupported failure modes

Table 8.3 is the failure model this system claims. It uses four statuses:

- **Verified**: a test case with a saved PASS log covers the failure.
- **Designed**: the mechanism exists in code, but the failure was never injected at that exact point.
- **Not supported**: a stated gap, not one hidden by wording.
- **Out of scope**: excluded by the teacher brief.

The same table is kept in `docs/failure-handling.md`. The check script for this chapter (TP-F03) fails if the two disagree, or if a row marked Verified cites a test case that has not passed.

**Reading the table.** Fifteen failure modes are verified. The crash-point matrix of the study guide is covered as follows:

- a crash before or after the accept commit is F1;
- a crash after the SQL effect but before the ack is F6;
- a failure after Redis but before the SQL result is F4 and F12.

"After the ack, before the effect" cannot happen, because every consumer acks only after its commit. The delivery negative control, which acks before processing, fails 24 checks (TP-M01).

Two rows are only designed:

**Table 8.3.** – Failure modes, how each is handled, and the evidence behind it.

| # | Failure | Handling | Status | Evidence |
|---|---|---|---|---|
| F1 | Client retries, also after commit but before the HTTP reply | `Idempotency-Key` returns the original order; a changed body gets 409 | Verified | TP-A03–A05, TP-A07 |
| F2 | Outbox write fails with the order write | One transaction: no order, no event | Verified | TP-O01 |
| F3 | Broker down; queue or binding missing; nack; return | Outbox row stays unpublished and is retried; delivered once after recovery | Verified | TP-O02 |
| F4 | PostgreSQL write fails after Redis reserved | Retried, then DLQ; replay gets `DUPLICATE` and writes the result once | Verified | TP-I03, TP-F01 |
| F5 | Order Service write fails while applying a result | Retried, then DLQ; replay applies it once | Verified | TP-W03, TP-F01 |
| F6 | Consumer crash after commit, before ack (all four) | Redelivery hits the Inbox; acked as already processed | Verified | TP-M01 |
| F7 | Duplicate deliveries, concurrent or with a new `MessageId` | Inbox, Redis `DUPLICATE`, one result row per order | Verified | TP-M02 |
| F8 | Completion arrives before the stock result | Requeued with 2/4/8 s delays; DLQ after 3 requeues | Verified | TP-M02 |
| F9 | Transient handler fault | Four attempts (1/2/4 s), then the service's DLQ | Verified | TP-F01 |
| F10 | Poison: malformed JSON, empty id, `Quantity` $\neq 1$ | The service's DLQ after one attempt, no effect | Verified | TP-F01 |
| F11 | Exhausted message | That service's DLQ only; replayed unchanged, applied once | Verified | TP-F01 |
| F12 | Published result lost (dead-lettered, DLQ purged) | Reconciliation re-triggers; Inventory re-sends the stored result | Verified | TP-F02 |
| F13 | Inventory down for a while | Work drains after restart, one outcome per order | Verified | TP-F02 |
| F14 | Inventory down for good | 3 re-triggers, one Error alert and metrics; stays `PendingStock` | Verified | TP-F02 |
| F15 | Order Service restarts while an order is stuck | Attempt count read from the database, not reset | Verified | TP-F02 |
| F16 | Crash after broker confirm, before the Outbox row is marked | Re-published with the same `MessageId`; the consumer's Inbox absorbs it | Designed | – |
| F17 | PostgreSQL server outage | Same path as F4/F5; tests revoke privileges, never stop the server | Designed | – |
| F18 | Redis data loss or restart | Not automatic: re-run warm-up before reopening; persistence not verified | Not supported | – |
| F19 | Overload beyond capacity | Nginx 429, admission 503 (concurrency and Outbox backlog) and bounded queues; backlog drains and the system recovers without a restart (local and EC2, pre-pilot) | Verified | TP-L01, TP-L02, TP-L04 |
| F20 | Downstream processing fails (`ProcessingFailed`) | The Process Worker is success-only; no event reaches this state | Out of scope | Brief |
| F21 | Payment failure and compensation | Not part of the system | Out of scope | Brief |
| F22 | Redis Cluster, RabbitMQ Cluster, PostgreSQL replication, multi-region | Single instances on one host | Out of scope | Brief |

- **F16.** Absorbing a same-`MessageId` copy is verified (TP-M01, TP-M02). A crash at exactly that point was not injected.
- **F17.** Every database fault in these tests was a revoked privilege, not a stopped PostgreSQL server.

Redis data loss (F18) is the main unsupported case. After a Redis loss, the warm-up must be repeated before sales reopen. Whether Redis persistence survives a crash without loss has not been verified.

Two rules hold for every row:

- No recovery changes an order's state to hide a failure. A stuck order stays `PendingStock` and is surfaced, never rewritten as `Rejected`.
- No recovery resets stock or deletes queues. Recovery is always a replay of the original message, or a re-send of a stored result.

## 8.7 Process Worker and Observability

This section adds the last component of the pipeline and the instrumentation the experiments will read it through. It also closes the oldest open question in this project: the `Confirmed` → `Processing` → `Completed` leg that `docs/order-state-machine.md` had refused to specify from the start.

### 8.7.1 The Process Worker, and what it settled about the state machine

`FlashSale.ProcessWorker` is a third service: it consumes `StockReserved`, waits a deterministic delay, and publishes `OrderProcessed`. Per Proposal §3 it simulates downstream processing only – there is no payment step, no failure injection and no compensation logic, all three being excluded by `docs/00-scope-lock.md`. The delay is deterministic rather than randomised on purpose: with a fixed service time, any variance the experiments measure in end-to-end latency comes from queueing and contention in the architecture, not from the simulator adding noise of its own.

It consumes from its *own* queue (`ProcessWorker.StockReserved`), bound to the same exchange with the same `StockReserved` routing key as Order Service's queue. A direct exchange copies the message to every bound queue, so both services react to the same event independently. Sharing one queue would have made them compete for messages, and roughly half of all orders would never have been processed at all.

**The six named states in the code.** An earlier draft removed `Processing` and `ProcessingFailed`, because Order Service only learned two facts after placement. The project then adopted the teacher's six named states (Section 7.5), and the code now implements them.

- **A real trigger for `Processing`.** When the Process Worker begins work on a reserved order, it publishes `OrderProcessingStarted` (routed, with publisher confirms). Its `MessageId` is derived from the order id: a name-based UUID that differs from the `OrderProcessed` id (`MessageId = OrderId`). This keeps the two events apart in the Inbox, and a replay still regenerates the same id.
- **A consumer like the others.** Order Service consumes the event on its own queue, with the Inbox, the 1/2/4 s retry ladder, validation and a DLQ.
- **`ProcessingFailed` is declared but unreachable.** The Worker is success-only by design, so no event and no code path sets it. A unit test and a source scan prove this.

**History, and events that arrive out of order.** Every transition writes a row to `order_status_history`, in the same transaction as the state change. The order's creation writes the first row. A duplicate or stale event is a no-op and writes no row. The API's polling response returns the history.

The Worker consumes `StockReserved` in parallel with Order Service, so its events often arrive before the order is `Confirmed`. They are then requeued on bounded delayed retry queues, never dropped. If the completion arrives before the start event, Order Service applies `Confirmed` → `Processing` → `Completed` in one transaction. It marks the `Processing` row as implied, and the start event later becomes a no-op.

The review found two defects in the first version:

- The implied row took the Worker's start time. That time can be earlier than the moment Order Service recorded `Confirmed`, so the history sorted `Processing` before `Confirmed`.
- The two rows written together could be inserted in either order.

The fix has three parts:

- The history is read by the identity column `Seq`, not by time.
- The implied row's time is the later of the Worker's start time and the confirmation time.

- The implied path saves the `Processing` row and the `Completed` row in two steps inside one transaction, so their order is fixed and the change stays atomic.

A completion without a start time, such as one published by an older Worker, uses the time it is applied, instead of the year 0001.

The unit tests that cover the state machine (TP-P02) are listed in Appendix B.3.

**Idempotency with no database.** The Process Worker is the only service here with no persistent store, and deliberately so: it holds no business state, so there is no local write that a publish could disagree with, and therefore no dual-write problem and no need for an Outbox – the reasoning that forced Inventory Service to add one simply does not apply. The brief's requirement that it "use `order_id` as its own idempotency key" is met by deriving the published message's `MessageId` from the order id (they are set equal) instead of minting a fresh one per hop as every other event does. A redelivered `StockReserved` therefore regenerates an `OrderProcessed` with the same `MessageId`, which Order Service's Inbox recognises and drops (only its start time can differ): the idempotency key travels in the message rather than living in a store.

A restart defect found by the code check, its fix and the Worker verifier (TP-P01) are in Appendix B.3.

### 8.7.2 Correlation IDs across three services

Each event now carries a `CorrelationId`, copied unchanged at every hop. That invariance distinguishes it from the two identifiers already in the contract: `MessageId` is regenerated at every hop (each consumer needs its own Inbox key), and `OrderId` only exists once an order does, whereas a correlation id identifies the *request*.

Order Service does not mint the value. ABP's own `app.UseCorrelationId()` middleware was already populating `ICorrelationIdProvider` from the caller's `X-Correlation-Id` header (generating one per request when absent), and `app.UseAbpSerilogEnrichers()` was already stamping that value onto every log line written during the request. Generating a second id in the controller would have made the HTTP log lines and the order row disagree about what the request is called – the precise failure this step exists to prevent – so the controller takes ABP's value and carries it onto the order and every event that follows. Across the message hops, where no HTTP middleware exists, each consumer re-establishes it with `LogContext.PushProperty`, which flows through the awaits into everything that logs downstream of it.

Every log line also carries a `Service` property, so one search over the three JSON logs shows which service wrote each line. The Process Worker's `Received` line now names the incoming `MessageId`, so the `StockReserved` it consumed can be matched to the one Order Service consumed.

The trace of one order across the three services (TP-P03) is in Appendix B.3.

### 8.7.3 Structured logging and metrics

**Logging.** Serilog was already configured in all services with `Enrich.FromLogContext()`; what changed is the file sink's format, from plain text to one JSON object per line (`CompactJsonFormatter`). Structure is what makes the correlation id above actually *queryable* – the experiments need to filter thousands of lines by a field and read timestamps back as values, not regex them out of a rendered string. The console sink deliberately stays human-readable: it is watched live by a person, not parsed.

**Metrics.** Prometheus and Grafana were added to `infra/docker-compose.yml`, with the Grafana datasource provisioned from a file so a fresh `docker compose up` returns a working stack (the same reproducibility reasoning behind `reset-and-seed.ps1`). All three services expose `/metrics` via `prometheus-net`. Because the services run on the host rather than in Compose, Prometheus scrapes `host.docker.internal`; the two ABP services are scraped over HTTPS with `insecure_skip_verify`, since they run on the ASP.NET Core development certificate. The scrape interval is 5s rather than Prometheus's 15s default: a load run lasting minutes would otherwise produce too few points to read a ramp or a recovery from.

`docs/metrics.md` is the metric dictionary. For every metric in the teacher's brief and in the experiment plan, it gives:

- the definition, with its boundaries and denominator;
- the one source the value is read from;
- how the value is extracted;
- whether that source existed then or came with the deployment and the experiments.

Table 8.4 maps each metric the brief requires to its source and its status today. "Collected" means the run-time collector records the value during a run. "Extracted" means the extraction script computes it after the run, from the JTL, the database

**Table 8.4.** – Metric definitions: source and status of every metric in the brief. Prometheus names omit the `flashsale_` prefix. Full definitions, denominators and extraction are in `docs/metrics.md`.

| Metric | Source | Status |
|---|---|---|
| API latency p50/p95/p99 | JMeter JTL (`elapsed`), submissions only | Extracted |
| Stock-decision latency | Request start to Inventory's result `CreatedAt` (C2–C4); JTL (C1) | Extracted |
| End-to-end completion latency | Request start to `CompletedAt` | Extracted |
| Incoming, accepted, completed throughput | JTL; `orders_accepted_total`; `orders_outcome_total{Completed}` | Extracted |
| Rejected request rate (overload) | JTL 429/503 | Extracted; the limits that cause it are in Section 8.8 |
| Internal error rate | JTL 5xx | Extracted |
| Reservation success / rejection rate | `stock_decisions_total{outcome}`; Inventory results | Extracted |
| Queue depth | RabbitMQ management API | Collected |
| Oldest message age | Each message's publish timestamp, read from the queue's head message | Collected |
| Backlog drain time | Queue depth, Outbox gauges, pending orders | Extracted |
| Recovery time | The time series above | Extraction ready; thresholds from the pilot |
| Retry and duplicate count | `consumer_retries_total`, `consumer_duplicates_total` | Extracted |
| DLQ message count | `consumer_dead_lettered_total`; DLQ depth | Extracted |
| Pending order count | Each order's own timestamps | Extracted |
| CPU, RAM, DB connections | `process_*` per service; `pg_stat_activity`; host counters | Collected (Linux path checked in a container and on EC2; with C4 replicas, process CPU and memory are summed per service, TP-P08) |
| Redis latency | Redis `INFO commandstats` (Lua calls) | Collected |
| RabbitMQ publish, deliver, ack rates | Management API `message_stats` locally; on EC2, deltas of the broker's Prometheus counters (port 15692, TP-L08) | Collected |

or the collected samples. Both scripts are described below. Every collected value is also summarised by the extraction.

The exported metrics fall into five groups:

- **Business results.** `flashsale_orders_accepted_total` counts orders, and only after the commit, so it can be compared with JMeter's request count. `flashsale_orders_outcome_total{outcome}` counts state changes that were actually applied, never an idempotent no-op, so it cannot drift from the database under redelivery. Inventory's `flashsale_stock_decisions_total{outcome}` has the values `reserved`, `rejected`, `not_open` and `duplicate`. Each counts a business result, never an attempt.
- **Work attempts, kept apart from results.** The Worker's `flashsale_orders_processed_total` and `flashsale_process_worker_duration_seconds` count every processing run, including replays. A replay therefore raises the attempt count but not the completion count.
- **Reliability.** All three consumers export `flashsale_consumer_retries_total` and `flashsale_consumer_dead_lettered_total`, both labelled by consumer. The dead-letter counter also has a reason: `exhausted`, `invalid` or `conflict`. Order and Inventory add `flashsale_consumer_duplicates_total{consumer}`, and Order adds `flashsale_consumer_requeued_early_total{consumer}`. The reconciliation metrics come from the failure handling.
- **Backlog.** Order and Inventory export `flashsale_outbox_unpublished` and `flashsale_outbox_oldest_unpublished_age_seconds`, refreshed on every publisher poll.
- **Resources.** The `prometheus-net` defaults give each process's CPU seconds and working set.

Labels hold only a few fixed values (consumer, outcome, reason). Order ids and message ids stay in logs and database rows. A label per order would give one series per order and overload Prometheus under the very load being measured. Every labelled series is created at start-up, so a rate over a run that saw no retries reads 0 and is never missing.

The metrics verifier (TP-P04) is described in Appendix B.3.

**Run-time collection and extraction.** Several brief metrics exist only while a run is in progress, and Prometheus does not hold them: queue depth, the age of the oldest queued message, broker rates, Redis latency, database connections and host

load. Three additions make every metric recordable and computable before the pilot:

- **Message timestamps.** Every publish (both Outbox publishers, both Worker publishers and both delayed requeues) now stamps the AMQP `timestamp` property. RabbitMQ then reports the oldest queued message's age per queue, at the resolution of its statistics interval (5 s by default). A unit test scans the source, so a future publisher cannot forget the stamp. TP-P06 checks all six paths on a live broker.

- **A run-time collector** (`scripts/collect-run-metrics.ps1`). Every 5 s it appends the queue counts and ages, the broker rates, the Redis Lua call totals, the connections per service account, every service metric, and host CPU and memory to one long-format CSV. A source that fails is recorded as `unavailable`, never as 0, and the other sources keep sampling. One sample takes about 4 s on the local host, so 5 s is the shortest usable interval. TP-P07 checks it with Inventory stopped (the backlog grows) and Redis stopped (its rows become `unavailable`).

- **An extraction script** (`scripts/extract-run-metrics.ps1`). It turns one run's JTL, database rows and collected samples into the numbers the Results tables ask for. Percentiles use the nearest-rank method. Negative and missing stage intervals are counted, never hidden. Counter increases survive a restart, because each series is handled on its own. Drain time waits for the queues, the Outbox gauges and the run's own pending orders to reach 0. Recovery time stays `unavailable` until the pilot sets its thresholds. TP-P08 checks it against hand-computed answers, including a counter reset, a negative interval and a late completion, and against a real run.

Writing these checks found four defects that a single test run would have hidden: a seven-hour shift in every time window (this machine is UTC+7, the EC2 host is not), a false 0 from a broker statistic that had not arrived yet, a counter sum that over-counted after one service restarted, and a pending count that included older orders and so could never drain. The time window, the counter reset and the older orders each have a known-answer check whose negative control fails as designed. The broker statistic is now recorded as `unavailable` until it arrives. That path is shown in the code and the test design, not by a separate test. From a fresh clone on a fresh database, TP-P06, TP-P07 and TP-P08 passed 40, 15 and 35 checks, and every earlier runtime verifier still passed (`tests/evidence/20261014T140055Z-message-timestamps.log`, `20261014T140223Z-run-collector.log`, `20261014T140415Z-extract.log`).

**Table 8.5.** – Stage timestamp schema. "Order" is `order_service`, "Inventory" is `inventory_service`.

| Stage | Column | Moment recorded |
|---|---|---|
| Request accepted | Order `orders.RequestAcceptedAt` | When Order Service builds the order, just *before* the order and its Outbox row commit. |
| Event published | Order `outbox_events.PublishedAt` (`OrderPlaced` row) | When the publisher marks the row, *after* the broker's routed confirm. |
| Stock decided | Inventory `outbox_events.CreatedAt` (the result row) | When Inventory writes the result, in the same transaction as its Inbox row, right after the Lua decision. |
| Decision applied | Order `orders.ConfirmedOrRejectedAt` | When Order Service applies `StockReserved` or `StockRejected`. |
| Processing started | Order `order_status_history.At` (`Confirmed` → `Processing`) | When Order Service applies `OrderProcessingStarted`. For an implied row, the later of the Worker's start and the confirmation. |
| Completed | Order `orders.CompletedAt` | When Order Service applies `OrderProcessed`. |

Latency percentiles are deliberately *not* computed in-process. JMeter measures client-observed latency directly, and end-to-end pipeline latency is reconstructed from the per-order timestamp schema below. A Prometheus histogram of the same quantity would be a third, bucketed copy that disagrees with both at the tail – which is exactly where this project's research question lives.

**Timestamp schema (Proposal §4d).** Table 8.5 lists every stage time the experiments use, with the column it is read from and the exact moment it records. The columns are EF Core columns in each service's own schema, so their names are PascalCase. All values are UTC, at microsecond precision, and come from one host's clock, because the experiments run every backend service on one EC2 instance. `docs/metrics.md` is the full version.

Two of these boundaries are not where a reader might assume, and both are declared rather than corrected:

- `RequestAcceptedAt` is set before the commit, so the order only becomes durable slightly later.
- `PublishedAt` is the time the confirmed publish was *sent*. Until the external review it was the time the confirm came back; since the broker delivers

before it confirms, 714 of 773 publish-to-decision intervals in the first TP-L04 run were negative. With the send time there were none in the following runs. A negative interval would still be reported as an anomaly, never clamped to zero, and a missing value is reported as missing, never as 0.

Publication time is read from the order's own Outbox row, joined by order id, and is not copied onto `orders`. Copying it would add a second write to the publish path of the very system whose throughput is being measured.

**Replays after completion.** When a `StockReserved` for an order that has already completed is delivered again, the two consumers behave differently, and both are correct:

- The Process Worker has no store, so it does the work again and republishes `OrderProcessed` with the same message id. Order Service's Inbox recognises that id, so the completion is not applied twice. TP-P04 case H measures this: the Worker's attempt counter rises by one, and the order still has one completion Inbox row.
- Order Service's own consumer treats a copy with the same message id as a duplicate (TP-P04 case C: duplicates $+1$, confirmed count unchanged). A stock result with a new message id, or one arriving after `Completed`, is a no-op, because the order has already moved past `Confirmed` (TP-M02). Neither case is dead-lettered. A dead letter is kept for poison messages and exhausted retries, and each service's dead letters stay in its own DLQ (TP-F01).

## 8.8 Load Shedding

C3 adds three limits in front of the parts that cost real work, as brief §4 asks: rate limiting at Nginx, concurrency limiting in the application and bounded queues in RabbitMQ. A new request is refused early with a response code that means "too busy". Every limit is off by default, so C2 behaves exactly as before until a C3 configuration switches the limits on. The design is in `docs/load-shedding.md`; Figure 8.1 shows where each layer refuses work.

**Nginx.** `infra/nginx.conf` is a reverse proxy to Order Service. Its upstream, rate and burst come from the environment. Only `POST /api/orders` is limited, in any letter case and with or without a trailing slash: a `map` on the method and path gives every other request an empty key, which `limit_req` ignores, so status polling

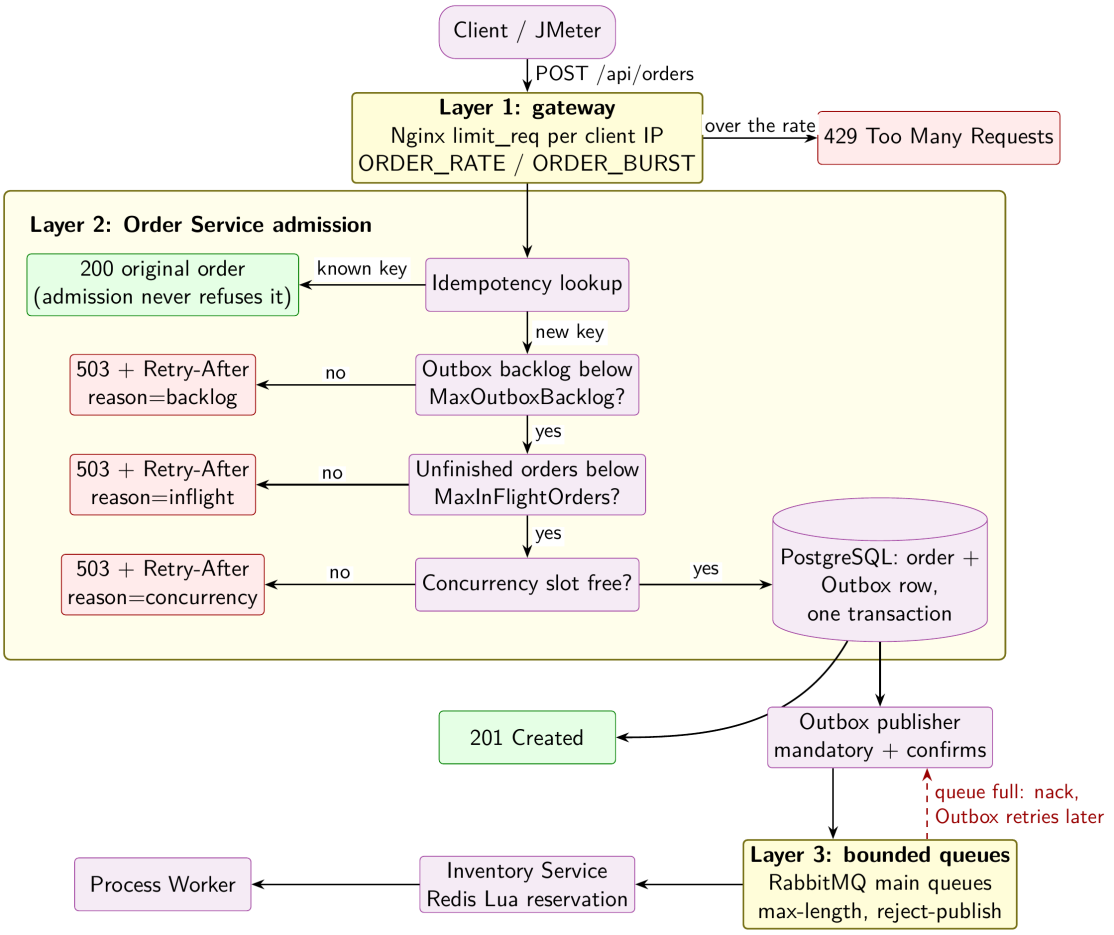



**Figure 8.1.** – The three load-shedding layers of C3. Order Service answers a retry of an accepted order before its own limits, but Nginx can still refuse the retry with 429, so clients retry with back-off. A refused request stops before the database write, and a full queue only delays publication: the Outbox keeps the event and retries it.

| Layer | What is refused | Client sees | Counted in |
|---|---|---|---|
| Nginx rate limit | `POST /api/orders` above `ORDER_RATE` | 429 | Nginx access log |
| Order Service admission | A new order while the concurrency gate is full | 503, `Retry-After: 1` | `flashsale_admission_rejected_total` |
| Outbox backlog | A new order while the unpublished Outbox is at `MaxOutboxBacklog` | 503, `Retry-After: 1` | `flashsale_admission_rejected_total (reason=backlog)` |
| In-flight orders | A new order while `MaxInFlightOrders` orders are not yet `Completed` or `Rejected` | 503, `Retry-After: 1` | `flashsale_admission_rejected_total (reason=inflight)` |
| Bounded queue | A publish to a main queue at `max-length` | Nothing (order already 201) | `flashsale_outbox_unpublished` |

**Table 8.6.** – The load-shedding layers of C3 (the in-flight bound was added after the review, Section D).

is never refused. The key is the client IP, which acts as one global bucket because JMeter runs from one machine.

**Admission.** Order Service holds a zero-wait semaphore whose size is `Admission: MaxConcurrentNewOrders`. The check sits after the idempotency lookup and before any database write. A retry of an accepted order therefore always gets its original order back, even when the gate is full, and a refused order leaves no row and no Outbox event. The slot is released in a `finally` block, so an exception or a cancelled request cannot leak it.

**Backlog bound.** A bounded queue alone does not bound admission: when a queue is full or the broker is down, accepted orders wait in the Outbox, which could grow without limit. Order Service therefore also refuses a new order (503, `reason=backlog`) when the unpublished Outbox has reached `Admission: MaxOutboxBacklog`. The check runs after the idempotency lookup and before the concurrency gate. The backlog is not counted per request: the Outbox publisher measures it on every poll, and each order accepted since that measurement is added at once. The bound therefore holds even while a poll is stuck retrying an unavailable broker. It can be overshot only by requests that pass the check at the same moment, which the concurrency gate caps.

**Bounded queues.** A RabbitMQ policy with a `max-length` and the overflow mode `reject-publish` [19] bounds the six main input queues and never the retry or dead-letter queues. It is set and removed at run time by `scripts/set-queue-bounds.ps1`, with no change to any queue declaration. A publish to a full queue is nacked; the publisher's mandatory publish with confirms (Section 8.4.4) leaves the Outbox row unpublished, and it is retried until the queue has room. Every consumer takes at most 20 unacknowledged messages (a prefetch, added after the review), so the bound covers real work; without it the Process Worker took its whole backlog as unacknowledged messages, which `max-length` does not count.

**In-flight bound (after the review).** The Outbox bound protects only the first hop. Order Service therefore also refuses a new order (503, `reason=inflight`) while `Admission:MaxInFlightOrders` orders are still unfinished anywhere in the pipeline. The count is estimated the same way as the backlog (a measurement about once a second, plus every order accepted since) and is only measured while the bound is on, so C2 pays nothing. Section D explains why it was needed.

**Verification.** Test case TP-L01 (`scripts/verify-load-shedding.ps1`) passed 18 of 18 checks on local services:

- **Gateway**, at 5 requests per second: 40 rapid POSTs gave 4 accepted and 36 refused with 429. Ten more POSTs each to `/api/orders/` and `/API/orders` were all refused, since they share the same limit. No refused key has an order row, and 15 polls through Nginx were never refused.
- **Admission**, with 2 slots held for 1.5 s: 10 parallel POSTs gave 2 accepted and 8 refused with 503 and `Retry-After`. The rejection counter rose by exactly 8, no refused key has an order row, and a replay of an accepted key returned 200 with the original order while the gate was full.
- **Bounded queue**, at a length of 3 with Inventory stopped: all 8 orders were accepted, `OrderPlaced` held 3, and the Outbox held the other 5. After Inventory started, the Outbox drained to 0, every order completed, and stock fell by exactly 8.
- **C2 unchanged**: with every limit off, 8 orders were accepted and completed.

Each limit was then removed in turn (rate 10 000 per second, admission off, no queue policy), and each removal made its case fail, so the checks detect a missing limit. Run against the earlier Nginx configuration, which limited only the exact path, the trailing-slash and upper-case check fails, as it should. The unit tests (91 at that point) and the earlier runtime test cases still pass.

Test case TP-L02 (the same script, 29 of 29 checks in total) covers the backlog bound and the accounting. With the broker stopped and a bound of 5, the first 5 new orders were accepted and the next 5 were refused with 503 and `Retry-After`. The `backlog` counter rose by exactly 5, and no refused key left an order row, an Outbox row or any change to Redis stock or the reservation set. A retry of an accepted key still returned its original order. Once the broker returned, the Outbox drained to 0, all 5 orders completed, stock fell by exactly 5, and new orders were admitted again. The metrics collector recorded the backlog rising, the `backlog` rejections and the queue depth. The validator then passed the run with `-Config C3` (Section 8.4.3). With the bound switched off, all 10 orders were accepted and the case fails, as it should.

A preliminary overload-and-recovery run before the pilot (TP-L04) is in Appendix B.4.

## 8.9 Deployment on AWS EC2

The brief requires the system under test on one EC2 instance with JMeter on a separate machine. Figure 8.2 shows the deployment that Terraform creates (`infra/terraform/`) and the runbook `docs/deployment.md` drives.

**Design.** Two instances, a backend (`m7i-flex.large`) and a JMeter host (`c7i-flex.large`), in `ap-southeast-2`. The account's AWS plan fixes that Region and these instance types. The design creates no NAT gateway, no Elastic IP, no load balancer and no managed database. Instances require IMDSv2, use encrypted gp3 disks that are deleted with them, and terminate themselves after four hours if a session is forgotten. Every container image is pinned to the exact version the local tests ran on. The database passwords on EC2 are generated on the host and never leave it.

**Who does what.** The owner runs `terraform apply` and `terraform destroy`. Everything else uses a read-only identity: `terraform plan`, checks, and commands on the two tagged instances through Systems Manager. That identity can create, change or delete nothing.

**Evidence (TP-L03, TP-L04).** The offline checker `scripts/verify-deployment.ps1` passes 19 of 19 checks: format and validation, no open ingress, no forbidden resources, allowed instance types, pinned images, only Nginx published, and the three images build. Three live sessions passed and were destroyed the same day, after which no instance, disk, address or security group was left. In the first, every

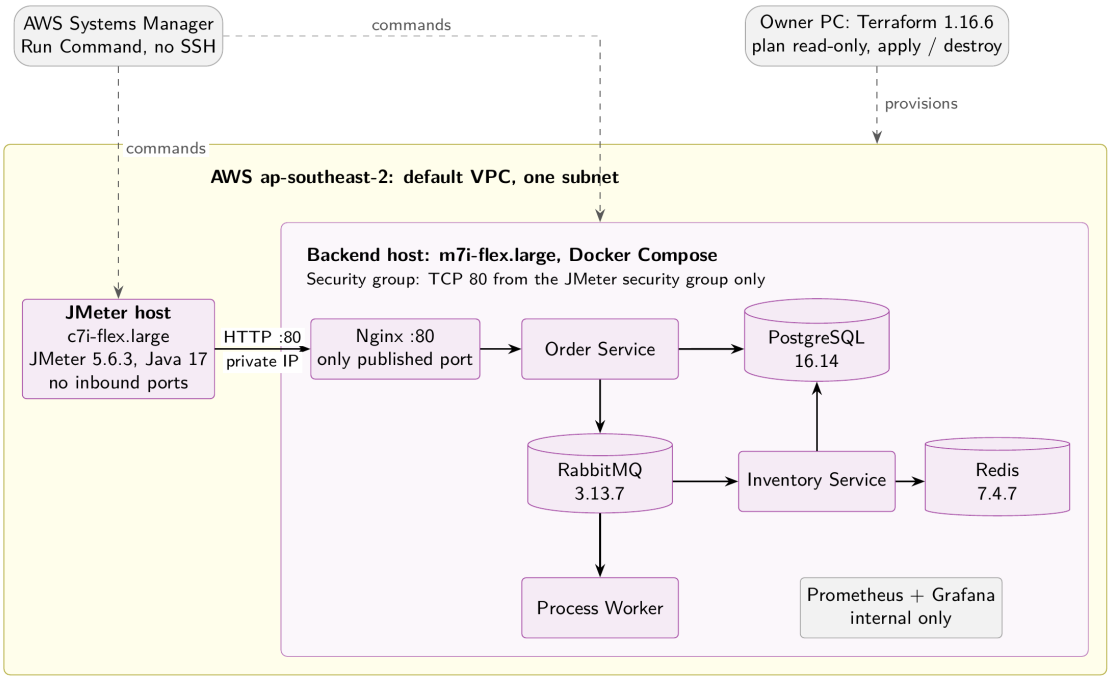



**Figure 8.2.** – EC2 deployment. Both hosts sit in one subnet of the account's Region. The backend runs every service with Docker Compose, and only Nginx publishes a port; its security group admits TCP 80 from the JMeter host's group and nothing else. Both hosts are reached through AWS Systems Manager, so neither opens SSH.

service came up, and from the JMeter host only port 80 answered; ports 22, 3000, 5432, 5672, 6379, 8080, 9090 and 15672 were closed. A JMeter smoke test of 44 requests passed with 5 orders completed (`tests/evidence/20261022T093449Z-ec2-deployment.log`). The second was the overload run in Table B.1 (`tests/evidence/20261022T163505Z-ec2-overload.log`), and the third its rerun on the reviewed code (`tests/evidence/20261024T104902Z-ec2-overload.log`).

# 9 Experimental Design

This chapter fixes how the official runs were made: a pilot and the fix it led to, the values locked for the runs, the workload profiles and the capacity of the host. The official, repeated measurements fill the Results chapter.

## 9.1 Pilot and calibration

Before the official runs, an 18-run pilot on the same EC2 deployment, one run per cell, checked the matrix end to end (Appendix C). Every pilot run passed the validator, but C3 and C4 drained slowly. A local diagnosis (Section C.2) found three causes that compound under load: Order Service applied stock results one message at a time; the queue bound and the Process Worker's retry ladder made dead letters; and reconciliation republished every order waiting longer than 30 s into the backlog. The fix gave Order Service four concurrent consumers, moved reconciliation to 120 s and set the Worker's concurrency to 20. On EC2 it removed reconciliation at 100/s, cut duplicates by 75–99 % and the end-to-end p95 by about 40 %; dead letters on C4 at 100/s fell from 22 per run to 0 and 2, so it reduced the second cause but did not remove it (Section C.3). The values below were locked after that confirmation.

## 9.2 Values locked for the official runs

The owner signed off these values on 4 November 2026 (Table 9.1). They are in `infra/ec2.env.example` and in the defaults of `scripts/run-matrix.ps1`, and section 5f of `docs/deployment.md` applies them per configuration. The full freeze manifest, with the frozen source commit, the Terraform file hashes, the tool and image versions, the workload, the retry limits and the metric definitions, is `docs/week14-freeze.md`. `scripts/verify-freeze.ps1` checks every value in it against its source file (TP-X09, Appendix F).

**Table 9.1.** – Values locked for the official runs, after the pilot and the EC2 confirmation.

| Setting | Value |
|---|---|
| Order Service consumer concurrency | 4 |
| Inventory consumer concurrency | 1 |
| Process Worker concurrency | 20 (prefetch 20) |
| Reconciliation stuck timeout | 120 s |
| Queue bound (C3, C4) | 1000 messages, `reject-publish` |
| Outbox-backlog admission limit | 2000 |
| Concurrent new orders (admission) | 64 |
| Gateway rate limit (C3, C4) | 200 requests/s, burst 100 |
| Stock per run | 100,000 units |
| Load levels | 50, 100, 200/s; 400/s for C3, C4 |
| Inventory replicas (C4) | 1, 2 and 4 |
| Run length and repeats | 60 s of open-loop load, 3 repeats |

## 9.3 Workload profiles

The brief lists several load profiles. The official matrix measures one of them across every configuration: **steady load on one hot product**, at 50, 100 and 200/s, with 400/s for C3 and C4 as a sustained overload above capacity. The other profiles are **coverage only**. They show that the JMeter plan and the system handle each shape correctly, but they are not repeated or compared across configurations. All of them ran on the EC2 Compose stack on a local machine at low rates, and every validator passed (TP-X04, `tests/evidence/20261031T161516Z-ec2-stack.log`; the plans are in `docs/workload-profiles.md`):

- **Ramp-up** (5, 15 then 30/s) and a **spike** (3, 40 then 3/s): every request accepted, one order per accepted request.
- **Overload with recovery** (3, 60 then 3/s against a low gateway limit): 86 requests in the overload stage were refused with 429, every request in the recovery stage was accepted, and the backlog drained.
- **One hot product** and **skewed products** (four products at 70/15/10/5 %): every product got orders, the most popular one the most (46, 10, 7 and 4).
- **Requests below, equal to and above inventory** (10, 20 and 30 requests for 20 units): reservations were exactly 10, 20 and 20, so above-inventory demand sells the stock and no more.

The overload-with-recovery shape is the one most likely to belong in a later comparison. Its recovery phase is not in the official matrix, which measures the 400/s overload as a steady load.

## 9.4 Capacity and the 2,000/s target

On this hardware the asynchronous path sustains between 50 and 100 orders/s: at 50/s it keeps up with no backlog, and at 100/s orders back up even with the fix. The API front end accepts up to about 180 requests/s. Both are far below the brief's initial target of about 2,000 reservation attempts/s, which the brief itself states for the chosen hardware. The backend stays on `m7i-flex.large` (the owner's decision), so this study reports the achieved rate with the hardware it ran on, as a limitation against that target, rather than scaling the hardware to reach it.

# 10 Results

This chapter gives the official results: the 66 runs, three repeats of every cell, with the values locked in Section 9.2. Their tables follow the teacher's evaluation plan (§6 of the brief) and templates fixed before any official run, so the measures were chosen before the numbers were known. The pilot's results are in Appendix C.4.

## 10.1 Measurement Method

The configurations are those of the brief:

- **C0**, a naive read-then-write. It only shows the race condition and is not a baseline.
- **C1**, a synchronous PostgreSQL conditional atomic update. This is the main baseline.
- **C2**, the asynchronous pipeline: Redis Lua, RabbitMQ, Outbox, Inbox and retry.
- **C3**, C2 with rate limiting, concurrency limiting and bounded queues.
- **C4**, C3 with 1, 2 and 4 Inventory consumers on the same EC2 host.

Every run uses the same JMeter plan, run from a separate machine, and the same seeded stock (`scripts/reset-and-seed.ps1`, `scripts/warm-up.ps1`). Rate measurements use the plan's open-loop mode (`-Jmode=open`, TP-X05), in which threads only submit: when threads also polled each order to completion, the submit rate fell to the Process Worker's completion rate (3.7/s at a requested 10/s and 6.5/s at 50/s on local Docker), so C1 and C2 would not have received equal load. A closed loop like that hides overload [26]. Each table states the rate achieved, read from the JTL, not the rate requested. After each run, `scripts/validate-correctness.ps1` gives its correctness verdict. A configuration that is fast but over-sells has not won anything, so no performance number is reported without that verdict.

Each cell runs 3 times under the same conditions. For every run, latency is reported as p50, p95 and p99. A table cell gives the median of those values across runs, followed by the spread (range) across runs, for example "412 (398–431)".

Latency comes from two sources that are kept apart. JMeter measures what the client sees. The stage timestamps (Section 8.7) measure the pipeline inside the system. Where the two disagree, the disagreement is a result to report, not an error to reconcile away. API throughput and business throughput are always reported separately, because an accepted request is not a completed order.

An order counts as accepted when its submission got a 2xx response; in every run that count equals the orders the database holds after the run (`db_accepted` in each manifest). Stage intervals and completion percentiles come from the stage timestamps of the orders accepted between the first and the last submission, which leaves out the few accepted just after the last send (at most 0.7 % of a run's orders in the official runs and 1.0 % in the supplementary ones).

Every number below comes from the saved runs in `tests/evidence/20261105T104832Z-official/`, and every table shows the steady-load, one-hot-product workload of the official matrix. The other workload profiles of the brief were run as coverage (Section 9.3).

## 10.2 Official Runs

The official matrix ran on 5 November 2026 on one pair of EC2 hosts (backend `m7i-flex.large`, JMeter `c7i-flex.large`) with every value frozen in `docs/week14-freeze.md` (frozen commit `9d00bea`; both hosts ran `a37f082`, whose service code and settings are identical). The plan is `docs/week14-official-runs.md`. There are 22 cells (C1, C2 and C3 at 50, 100 and 200/s, C3 also at 400/s, and C4 with 1, 2 and 4 Inventory consumers at 50, 100, 200 and 400/s), each run 3 times: 66 runs, in repeat-major order (repeat 1 of every cell, then repeat 2, then repeat 3). Every run had 60 s of open-loop load on one hot product with 100,000 units, after a full reset, seed and warm-up. All raw data, manifests and validator logs are in `tests/evidence/20261105T104832Z-official/`; its `summary.log` lists every run (TP-X02). The tables and figures below are generated from that folder by `report/figures/analyze_official.py`, which also writes one row per run (`report/figures/official/runs.csv`).

A table cell is the median of the 3 runs, with the range across runs in brackets when the runs differ. Percentiles are nearest-rank. Client latency comes from the raw JTL (2xx submissions only). Stock-decision and completion latency come from the stage timestamps in the database, per order. Drain is the matrix's own measurement: the seconds from the end of the load until no order is outside `Completed` or `Rejected` and both Outboxes are empty. The extractor's own drain field does not apply to matrix runs, because the collector stops as soon as that drain check passes, so no sample is taken after the drain.

## 10.3 Correctness by Configuration

Table 10.1 comes first, because a performance number only counts for a configuration that passed these checks. Every one of the 66 runs passed every check that applies to it, and no unit was ever over-sold. C0 is not part of the official matrix: it exists only to show the race, which it did (TP-B01, Section 8.1).

| Check | C1 | C2 | C3 | C4 |
|---|---|---|---|---|
| 0b. Run isolation (no data from before the run) | 9/9 | 9/9 | 12/12 | 36/36 |
| 1. Available inventory $\geq 0$ | 9/9 | 9/9 | 12/12 | 36/36 |
| 2. Successful reservations $\leq$ initial inventory | 9/9 | 9/9 | 12/12 | 36/36 |
| 3. One reservation per order (at most one successful reservation) | 9/9 | 9/9 | 12/12 | 36/36 |
| 4. A duplicate message never deducts twice | n/a | 9/9 | 12/12 | 36/36 |
| 5. Accepted orders terminal; the states add up to the accepted orders | n/a | 9/9 | 12/12 | 36/36 |
| 6. Queue bound off (C1, C2 only) | 9/9 | 9/9 | n/a | n/a |
| 7. Status history complete (one downstream result applied per order) | n/a | 9/9 | 12/12 | 36/36 |
| All checks hold (validator exit 0) | 9/9 | 9/9 | 12/12 | 36/36 |
| Units over-sold (worst run) | 0 | 0 | 0 | 0 |

**Table 10.1.** – Validator checks per configuration: runs that passed out of runs made, over the 66 official runs. "n/a" marks a check that does not apply: C1 is synchronous, so it has no broker duplicates (4), no asynchronous accounting (5) and no status history (7); check 6 is defined for C1 and C2 only. Check 7 requires an unbroken chain of transitions ending at the order's state, and extttCompleted has no outgoing transition, so an order can have only one: it also shows one applied downstream result per order.

## 10.4 Latency by Configuration

**What the client sees.** Table 10.2 and Figure E.2 (Appendix E) give the latency of order submissions. At 50 and 100/s, C1 answers fastest: p50 10–11 ms and p95 30–39 ms, against p50 35–223 ms and p95 137–791 ms for C2 to C4 at 50/s. The asynchronous design does not buy a faster acknowledgement on this host. Its request path still writes the order and its Outbox row in one PostgreSQL transaction, and every service, the broker, Redis and the database

| Config. | Rate | Achieved (/s) | p50 | p95 | p99 |
|---|---|---|---|---|---|
| C1 | 50 | 50.5 | 11 | 30 (21–43) | 96 (34–110) |
| C1 | 100 | 101.2 | 10 (10–11) | 39 (33–44) | 99 (82–151) |
| C1 | 200 | 198.8 | 45 (27–74) | 919 (744–935) | 1,384 (1,200–1,455) |
| C2 | 50 | 50.6 | 51 (50–69) | 199 (196–221) | 317 (284–366) |
| C2 | 100 | 100.6 | 388 (343–407) | 739 (672–897) | 887 (804–1,087) |
| C2 | 200 | 167.8 | 1,115 (1,089–1,133) | 1,628 (1,598–1,675) | 1,831 (1,756–1,850) |
| C3 | 50 | 50.3 | 223 (197–248) | 504 (483–527) | 661 (659–706) |
| C3 | 100 | 100.6 | 417 (392–431) | 888 (885–1,069) | 1,240 (1,113–1,361) |
| C3 | 200 | 189.0 | 838 (823–976) | 1,721 (1,693–1,787) | 2,071 (1,813–2,105) |
| C3 | 400 | 360.1 | 1,148 (1,058–1,302) | 2,578 (2,526–2,663) | 2,826 (2,777–2,940) |
| C4, 1 cons. | 50 | 50.7 | 35 (31–36) | 137 (114–181) | 239 (186–334) |
| C4, 1 cons. | 100 | 101.0 | 341 (329–376) | 718 (714–788) | 945 (942–971) |
| C4, 1 cons. | 200 | 190.4 | 822 (817–934) | 1,669 (1,556–1,791) | 1,944 (1,724–2,262) |
| C4, 1 cons. | 400 | 362.6 | 1,007 (847–1,223) | 2,584 (2,151–2,602) | 2,864 (2,481–2,867) |
| C4, 2 cons. | 50 | 50.8 | 106 (84–111) | 382 (334–396) | 516 (467–563) |
| C4, 2 cons. | 100 | 101.1 | 376 (343–376) | 757 (722–782) | 1,051 (942–1,153) |
| C4, 2 cons. | 200 | 187.8 | 886 (825–899) | 1,774 (1,525–1,830) | 2,088 (1,720–2,323) |
| C4, 2 cons. | 400 | 362.6 | 1,177 (809–1,405) | 2,227 (2,077–2,586) | 2,656 (2,533–2,906) |
| C4, 4 cons. | 50 | 50.5 | 213 (198–215) | 791 (704–850) | 1,150 (998–1,206) |
| C4, 4 cons. | 100 | 100.7 | 412 (381–473) | 849 (811–959) | 1,038 (1,038–1,189) |
| C4, 4 cons. | 200 | 185.5 | 973 (939–983) | 1,769 (1,675–1,771) | 2,044 (1,943–2,338) |
| C4, 4 cons. | 400 | 358.1 | 1,181 (1,140–1,359) | 2,568 (2,387–2,680) | 2,917 (2,694–3,097) |

**Table 10.2.** – Client-observed latency (ms) of order submissions (2xx only), from the raw JTL, with the rate JMeter achieved (median). The maximum of every run is in `runs.csv`. Cells: median of 3 runs (range).

share the backend's two vCPUs, which run at 85–99 % during the load from 50/s on (Table 10.10). At 200/s every configuration slows down sharply: C1's p95 rises to 919 ms as requests queue on the hot row, and C2 to C4 reach p50 0.8–1.1 s.

At 200/s C2 achieved only 168/s. The plan's open mode keeps 200 threads, and each thread waits for its response; at about 1.1 s per response 200 threads can offer only about 180 requests a second. The shortfall is therefore part of the result, not a load-generator fault: the backend's latency limited the offered rate. The JMeter host itself had spare capacity (Section C.1).

**Inside the system.** Table 10.3 starts both measures at the moment the order is accepted. For C1 the stock decision is made inside the request, so its decision latency is its API latency, and it has no completion stage. For C2 to C4 the decision and the completion come much later than the acknowledgement. At 50/s the p95 decision is 2.0–3.6 s and the p95 completion 3.7–15 s; at 100/s and above, orders wait tens of seconds, and C2's p95 completion reaches 120 s at 200/s. The backend accepts orders faster than it can complete them, so a backlog forms and is worked off after the load ends.

**Where the time goes.** Table 10.4 splits C2's pipeline. At 100 and 200/s the largest share is between acceptance and publication: the Order Service Outbox

| Config. | Rate | Stock decision | | Completion | |
|---|---|---|---|---|---|
| | | p50 | p95 | p50 | p95 |
| C1 | 50 | 0.011 | 0.030 (0.021–0.043) | n/a | n/a |
| C1 | 100 | 0.010 (0.010–0.011) | 0.039 (0.033–0.044) | n/a | n/a |
| C1 | 200 | 0.045 (0.027–0.074) | 0.919 (0.744–0.935) | n/a | n/a |
| C2 | 50 | 1.5 (1.4–1.5) | 2.1 (2.0–2.1) | 3.1 (3.1–3.2) | 4.3 (4.2–4.3) |
| C2 | 100 | 20.9 (20.8–22.8) | 39.6 (37.9–39.7) | 46.8 (46.7–47.4) | 47.9 (47.7–48.2) |
| C2 | 200 | 79.8 (79.7–83.2) | 108.7 (107.2–115.3) | 85.4 (82.9–87.4) | 119.9 (116.0–122.9) |
| C3 | 50 | 1.7 (1.6–1.7) | 2.6 (2.5–2.6) | 7.5 (5.3–7.5) | 10.3 (7.6–11.8) |
| C3 | 100 | 19.5 (17.6–22.4) | 30.9 (28.4–31.0) | 50.6 (49.6–52.8) | 58.2 (56.5–58.2) |
| C3 | 200 | 36.1 (35.6–38.7) | 45.4 (45.1–48.1) | 55.7 (55.3–58.7) | 61.1 (59.3–63.9) |
| C3 | 400 | 40.5 (38.1–40.6) | 47.5 (45.4–49.3) | 56.1 (55.0–57.7) | 57.7 (57.5–58.9) |
| C4, 1 cons. | 50 | 1.4 (1.3–1.4) | 2.0 | 2.7 (2.6–2.9) | 3.7 (3.5–4.0) |
| C4, 1 cons. | 100 | 18.0 (17.4–18.6) | 31.4 (29.8–34.0) | 49.9 (49.9–53.4) | 57.5 (57.5–61.3) |
| C4, 1 cons. | 200 | 35.7 (30.7–39.1) | 45.7 (40.6–51.0) | 56.3 (55.3–56.5) | 61.6 (59.9–62.1) |
| C4, 1 cons. | 400 | 38.4 (38.2–39.3) | 46.7 (46.7–48.9) | 56.8 (53.0–59.7) | 58.2 (54.9–61.2) |
| C4, 2 cons. | 50 | 1.5 (1.3–1.5) | 2.3 (2.2–2.6) | 3.6 (3.1–3.9) | 5.1 (4.6–6.7) |
| C4, 2 cons. | 100 | 18.9 (16.9–19.4) | 23.4 (21.3–24.3) | 53.1 (52.3–54.0) | 59.9 (58.3–60.5) |
| C4, 2 cons. | 200 | 29.5 (27.1–31.5) | 42.4 (38.9–44.5) | 59.4 (57.6–59.7) | 66.6 (63.3–66.7) |
| C4, 2 cons. | 400 | 35.2 (34.0–37.0) | 45.5 (42.9–50.3) | 58.2 (55.5–59.5) | 61.4 (58.3–64.4) |
| C4, 4 cons. | 50 | 1.7 (1.7–1.8) | 3.6 (3.3–3.7) | 9.7 (8.1–9.9) | 15.0 (14.3–15.5) |
| C4, 4 cons. | 100 | 18.5 (17.6–19.0) | 26.0 (24.4–26.3) | 58.3 (56.3–59.3) | 63.9 (63.3–65.9) |
| C4, 4 cons. | 200 | 28.7 (27.0–30.8) | 41.8 (39.9–42.3) | 62.7 (61.7–64.8) | 68.8 (68.5–71.3) |
| C4, 4 cons. | 400 | 34.1 (33.0–34.5) | 42.5 (42.0–43.3) | 60.7 (60.6–61.7) | 63.6 (62.7–64.1) |

**Table 10.3.** – Stock-decision and completion latency (s), from the acceptance of the order, per order from the stage timestamps. For C1 the decision is made inside the request, so the decision values are its API latency and there is no completion stage. Cells: median of 3 runs (range).

publisher cannot keep up, so unpublished rows pile up (peak about 8,200 at 200/s, Figure E.1, Appendix E). The publisher already batches: it claims 50 rows, sends them on one channel, waits for all their confirms together and claims the next batch at once while batches are full. But it is one serial loop per service, and it runs in the Order Service process, whose CPU the API is using to accept the load (Table 10.9). After the load ends the backlog moves on into the `OrderPlaced` queue, and the Process Worker's 200 ms per order at concurrency 20 bounds the rest. No publish-to-decision interval was negative.

## 10.5 Throughput, Rejection and Errors

Table 10.5 keeps API throughput apart from business throughput. C1 and C2 accept every request, because neither sheds load. C3 and C4 refuse part of the load early: 2.6–11 % at 100/s (the Outbox-backlog admission limit), 63–65 % at 200/s and 83–84 % at 400/s (the gateway's 200 requests/s and the admission limits). Every refusal is a 429 from the gateway or a 503 with `Retry-After` from the admission control; no run had a server error or another non-2xx response. With 100,000 units the stock never ran out, so every decided order was reserved.

| Stage | Rate | p50 | p95 | Negative |
|---|---|---|---|---|
| Accepted → published | 50 | 1.0 | 2.0 | 0 |
| Accepted → published | 100 | 15.2 (14.6–16.5) | 23.5 (22.7–24.7) | 0 |
| Accepted → published | 200 | 45.4 (43.8–47.5) | 49.5 (48.4–50.4) | 0 |
| Published → decided | 50 | 0.4 (0.3–0.4) | 0.9 | 0 |
| Published → decided | 100 | 0.9 (0.7–1.0) | 28.4 (25.8–30.2) | 0 |
| Published → decided | 200 | 33.4 (30.8–35.2) | 71.3 (70.9–74.7) | 0 |
| Decided → applied | 50 | 0.9 (0.8–1.0) | 2.1 (2.1–2.2) | 0 |
| Decided → applied | 100 | 21.2 (20.2–22.3) | 36.6 (36.4–37.9) | 0 |
| Decided → applied | 200 | 1.9 (1.8–1.9) | 37.0 (35.2–40.8) | 0 |
| Applied → completed | 50 | 0.5 | 1.2 (1.1–1.2) | 0 |
| Applied → completed | 100 | 0.6 (0.6–0.9) | 2.8 (2.5–4.0) | 0 |
| Applied → completed | 200 | 3.2 (1.8–4.5) | 7.3 (6.1–9.5) | 0 |
| Accepted → completed | 50 | 3.1 (3.1–3.2) | 4.3 (4.2–4.3) | 0 |
| Accepted → completed | 100 | 46.8 (46.7–47.4) | 47.9 (47.7–48.2) | 0 |
| Accepted → completed | 200 | 85.4 (82.9–87.4) | 119.9 (116.0–122.9) | 0 |

**Table 10.4.** – Time spent in each stage of the C2 pipeline (s), per order from the stage timestamps. Negative counts publish-to-decision intervals below zero (publication is marked after the broker's confirm); none occurred. Cells: median of 3 runs (range).

Two rates describe the pipeline. *Done/s in load* counts the orders that reached a terminal state per second while the load ran. At 50/s every configuration keeps pace (46–51 a second). At 100/s it falls to 21–30 a second, and at 200/s and above to 4–10 a second: while the API is busy accepting, little work leaves the pipeline, and the backlog is worked off after the load ends. *99 % done* is how long that takes: 42 and 124 s for C2 at 100 and 200/s, and 36–59 s for C3 and C4 at 100/s and above. Section 11.3 explains the starvation from the CPU split.

*Completed/s* divides the completed orders by the load time plus the matrix's drain. For C2 it is 60–66 a second at 100/s and above. For C3 and C4 it is lower, because in many of their runs at 100/s and above the drain waited about 300 s for the reconciliation of a few dead-lettered orders (Section 10.6). That wait is in the divisor, so the column understates their rate three to four times in the cells that waited; it is kept because the frozen table template defined it, and the two columns before it are the ones to read.

## 10.6 Overload, Backlog and Recovery

Table 10.7 shows the backlog each configuration built. Without load shedding, C2 lets the Outbox grow to about 8,200 rows and the `OrderPlaced` queue to about 6,000 messages at 200/s; it drains them in about 110 s after the load. With the C3 limits, at 100/s and above, the Order Service Outbox is held near its 2,000-row admission limit: the summed peak is 2,000–3,400 for C3 and for C4 with one

| Config. | Rate | Achieved | Accepted | Done/s in load | 99 % done (s) | Completed/s* | Overload rej. % |
|---|---|---|---|---|---|---|---|
| C1 | 50 | 50.5 | 3,025 (3,024–3,036) | 50.4 (50.4–50.6) | 0 | n/a | 0.0 |
| C1 | 100 | 101.2 | 6,067 (6,049–6,068) | 101.1 (100.8–101.1) | 0 | n/a | 0.0 |
| C1 | 200 | 198.8 | 11,938 (11,934–12,003) | 199.0 (198.9–200.1) | 0 | n/a | 0.0 |
| C2 | 50 | 50.6 | 3,031 (3,029–3,037) | 51.3 (50.0–51.7) | 4 | 50.5 (50.5–50.6) | 0.0 |
| C2 | 100 | 100.6 | 6,036 (6,027–6,059) | 23.5 (22.1–28.1) | 42 | 65.9 (61.6–66.2) | 0.0 |
| C2 | 200 | 167.8 | 10,091 (9,971–10,136) | 4.2 (3.5–4.9) | 124 (122–126) | 59.7 (57.0–60.3) | 0.0 |
| C3 | 50 | 50.3 | 3,012 (3,007–3,020) | 46.3 (43.6–50.2) | 2 (2–4) | 50.2 (50.1–50.3) | 0.0 |
| C3 | 100 | 100.6 | 5,804 (5,421–5,831) | 23.4 (22.7–27.3) | 54 (53–55) | 53.2 (16.1–54.2) | 3.5 (3.3–10.3) |
| C3 | 200 | 189.0 | 4,034 (3,926–4,090) | 8.9 (7.7–11.5) | 43 (41–45) | 10.7 (10.5–48.0) | 64.5 (63.5–65.5) |
| C3 | 400 | 360.1 | 3,665 (3,439–3,702) | 6.7 (3.0–16.2) | 36 (35–39) | 9.7 (9.1–9.8) | 83.3 (83.1–84.3) |
| C4, 1 cons. | 50 | 50.7 | 3,034 (3,032–3,035) | 51.3 (49.6–52.0) | 2 (2–4) | 50.6 (50.5–50.6) | 0.0 |
| C4, 1 cons. | 100 | 101.0 | 5,901 (5,736–5,933) | 26.0 (23.8–27.8) | 56 (53–61) | 16.1 (15.2–16.1) | 2.6 (2.0–5.3) |
| C4, 1 cons. | 200 | 190.4 | 4,104 (3,814–4,436) | 9.0 (8.6–9.8) | 45 | 12.1 (11.0–42.9) | 64.2 (60.8–66.8) |
| C4, 1 cons. | 400 | 362.6 | 3,608 (3,583–3,789) | 5.0 (4.6–9.4) | 38 (33–38) | 10.3 (9.9–44.5) | 82.8 (82.8–84.3) |
| C4, 2 cons. | 50 | 50.8 | 3,039 (3,035–3,040) | 50.0 (47.3–50.3) | 3 (2–4) | 50.6 (50.6–50.7) | 0.0 |
| C4, 2 cons. | 100 | 101.1 | 5,704 (5,643–5,875) | 30.1 (28.9–31.5) | 59 (56–60) | 52.7 (14.7–55.4) | 6.0 (3.0–6.3) |
| C4, 2 cons. | 200 | 187.8 | 4,199 (4,186–4,305) | 9.5 (7.9–17.6) | 49 (48–50) | 11.5 (11.5–46.3) | 62.8 (62.6–62.9) |
| C4, 2 cons. | 400 | 362.6 | 3,493 (3,475–3,496) | 8.1 (3.4–9.2) | 36 | 40.9 (39.3–41.6) | 84.3 (83.5–84.7) |
| C4, 4 cons. | 50 | 50.5 | 3,023 (3,013–3,038) | 50.2 (49.4–50.8) | 4 (2–5) | 50.4 (50.2–50.6) | 0.0 |
| C4, 4 cons. | 100 | 100.7 | 5,394 (5,319–5,476) | 21.4 (20.4–27.3) | 59 (58–60) | 14.7 (14.1–49.8) | 11.0 (9.1–11.7) |
| C4, 4 cons. | 200 | 185.5 | 4,130 (3,888–4,150) | 6.8 (6.6–8.1) | 51 (51–54) | 10.7 (9.9–11.1) | 63.0 (62.7–65.4) |
| C4, 4 cons. | 400 | 358.1 | 3,535 (3,419–3,550) | 5.6 (5.1–5.8) | 46 (45–47) | 9.0 (8.8–9.1) | 83.8 (83.7–84.4) |

**Table 10.5.** – Throughput and rates per cell. Achieved is the submission rate JMeter reached (/s). Accepted counts the 2xx responses, equal to the orders in the database (C1: requests decided). Done/s in load is the orders that reached `Completed` or `Rejected` per second during the 60 s load (C1: requests decided). 99 % done is the seconds after the last submission until unfinished orders fall to 1 % of their count (Table 10.6; C1 builds no backlog). *Completed/s is completed orders divided by 60 s plus the drain; for C3 and C4 the drain usually includes the 300 s reconciliation wait, so it is not the pipeline's speed. Overload rejection counts 429 and 503 responses. Not shown because they are the same in every run: 100 % of stock decisions reserved a unit, and no run had any other non-2xx response. Cells: median of 3 runs (range).

consumer, and up to about 4,000 with 2 consumers and 9,400 with 4, whose Inventory Outboxes add to the total. The ready messages of the main queue stay at its 1,000-message bound; with the messages its consumers hold unacknowledged, the measured depth peaked at 1,032.

**Recovery after overload.** Every run at 200 and 400/s is an overload: it offers more than the backend completes (about 50–66 orders a second, Table 10.5). When the 60 s load ends, the backlog it left behind has to be worked off. Table 10.6 and Figure 10.1 follow that backlog in the collector's samples, which keep running until the drain check passes. Unfinished orders are the orders accepted during the run minus those completed or rejected, from the Order Service counters.

Without load shedding, C2 at 200/s ends the load with about 9,800 unfinished orders and 8,200 unpublished Outbox rows; the Outbox empties within about 30 s, the queues fill and drain behind it, and 99 % of the orders are done after 124 s. With the C3 limits the system ends the load with only about 3,000–3,700 unfinished orders, and 99 % of them are done after 36–51 s in every C3 and C4 cell. The number of Inventory consumers makes no difference to how fast it recovers.

The stable point, where the matrix's drain check passes, is later in most C3 and C4 runs: about 300–330 s. The remaining orders are the handful whose `StockReserved` message the Process Worker dead-lettered (2–27 per run, Table 10.8). They are too few to see on the figure's scale, and each waits for the reconciliation of `Confirmed` orders after the frozen 300 s timeout. The last column of Table 10.6 counts those runs. So recovery has two parts: the bulk of the backlog clears in under a minute with load shedding, and a short tail of dead-lettered orders then waits for reconciliation. No service restarted in any run, and every run ended with every accepted order in a terminal state.

**A defect the experiment found.** The drain splits into two groups. Every run without a dead letter drained within 115 s. Every drain longer than that came from a run with dead letters: 24 of the 29 runs with dead letters drained in 302–332 s, and the other 5 in 33–50 s. The dead letters are the Process Worker's. When an Order Service queue it publishes its result to is full at the C3 bound, RabbitMQ refuses the publish (`reject-publish`); the Worker's bounded retries (1, 2 and 4 s) run out, and it dead-letters the `StockReserved` message it was processing. That order stays `Confirmed` until reconciliation picks it up after the frozen 300 s timeout for `Confirmed` or `Processing` orders, and only then completes. No order was lost and every validator passed. But in most overload runs reconciliation became a routine recovery path, and the brief allows it only as a safety net that

| Config. | Rate | Unfinished | Outbox | Queues | 99 % done (s) | Stable (s) | Reconc. |
|---|---|---|---|---|---|---|---|
| C2 | 200 | 9,810 (9,566–9,851) | 8,188 (8,112–8,294) | 6,230 (6,193–6,351) | 124 (122–126) | 109 (108–115) | 0/3 |
| C3 | 200 | 3,448 (3,396–3,595) | 2,356 (2,241–2,376) | 3,974 (3,609–3,994) | 43 (41–45) | 313 (24–322) | 2/3 |
| C3 | 400 | 3,205 (2,696–3,329) | 1,970 (616–2,210) | 3,624 (3,367–3,817) | 36 (35–39) | 318 (317–319) | 3/3 |
| C4, 1 cons. | 200 | 3,629 (3,233–3,940) | 2,440 (2,123–2,736) | 3,978 (3,540–4,054) | 45 | 306 (29–313) | 2/3 |
| C4, 1 cons. | 400 | 3,324 (2,954–3,510) | 2,156 (1,968–2,212) | 3,628 (3,128–3,778) | 38 (33–38) | 303 (21–309) | 2/3 |
| C4, 2 cons. | 200 | 3,709 (3,213–3,753) | 3,206 (2,121–3,238) | 3,670 (3,519–4,150) | 49 (48–50) | 305 (33–305) | 2/3 |
| C4, 2 cons. | 400 | 3,027 (2,978–3,244) | 1,972 (1,961–2,135) | 3,646 (3,335–3,733) | 36 | 25 (24–29) | 0/3 |
| C4, 4 cons. | 200 | 3,690 (3,455–3,697) | 2,926 (2,876–4,461) | 3,665 (3,478–3,783) | 51 (51–54) | 328 (313–332) | 3/3 |
| C4, 4 cons. | 400 | 3,155 (3,135–3,223) | 2,398 (2,340–2,434) | 3,576 (3,386–3,645) | 46 (45–47) | 332 (327–332) | 3/3 |

**Table 10.6.** – Recovery after the overload cells (200 and 400/s). Unfinished, Outbox and Queues are the backlog when the load ends: unfinished orders, unpublished Outbox rows (Order Service plus every Inventory replica) and the peak of the messages summed over the main queues afterwards. 99 % done is the seconds from the last submission until unfinished orders first fall to 1 % of their count at the end, at the collector's 5 s resolution. Stable is the matrix's drain time, whose clock starts when its post step begins, a few seconds after the last submission. Reconc. counts the runs with dead-lettered orders that waited for the 300 s reconciliation. Cells: median of 3 runs (range).

does not replace the Outbox, retries or the dead-letter queue. The bounded queue pushes back on the Worker, and the Worker has no way to wait for room other than a retry ladder shorter than the time a queue stays full. The pilot diagnosis had already seen this cause, and the fix before the official runs reduced it without removing it (Section 9.1). Section 11.4 gives the fix, which was not made because the code was frozen for the official runs.

The earlier overload-and-recovery profile (Appendix B.4) shows the same behaviour from the client's side: refusals during the overload, then full acceptance again and a backlog drained without a restart (TP-L04, Figure B.2 in Section 8.8).

## 10.7 Consumer Replicas on One Host

Figure 10.2 compares C4 with 1, 2 and 4 Inventory consumers. More consumers did not help. At 100/s the accepted rate fell from 98 to 90 orders a second and the p95 completion rose from 57 to 64 s; at 50/s four consumers raised the p95 completion from 3.7 to 15 s. The reason is the host: its CPU was already at 96–99 % during the load at 100/s and above, and at 85 % with one consumer at 50/s, rising to 99 % with four. Each extra consumer is another process competing for the same two vCPUs and the same database connections (peak 32–70 of 200), so on one host it adds contention, not capacity. This is the shared-resource contention the brief asks C4 to show; it says nothing about replicas on separate machines.

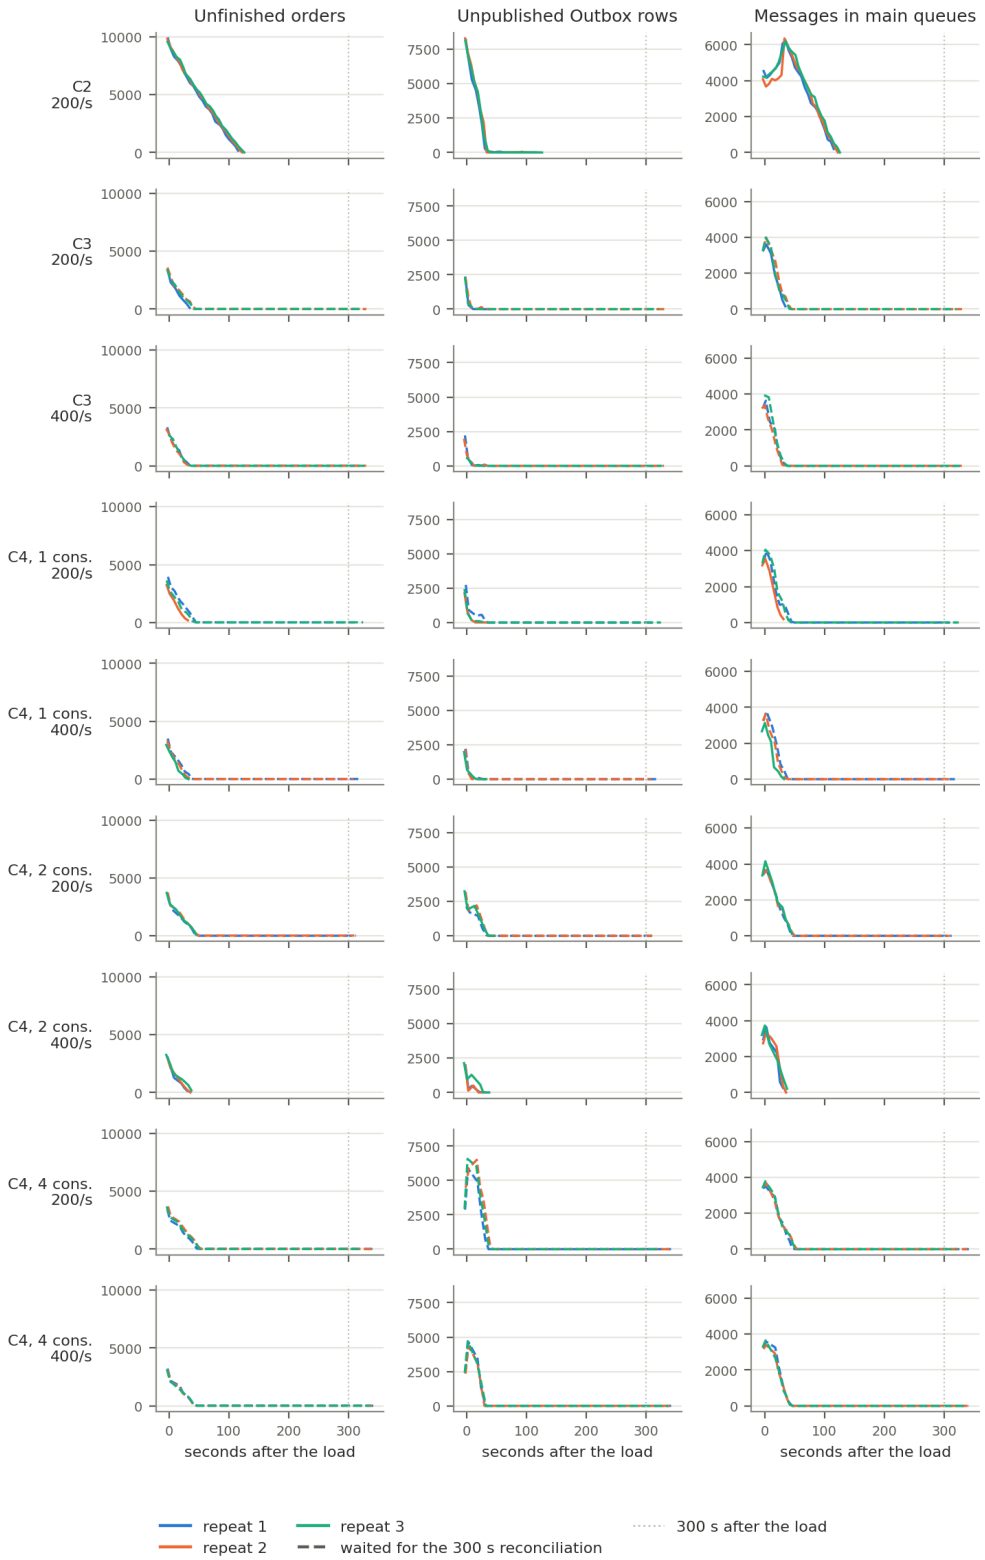



**Figure 10.1.** – The backlog after each overload cell, one line per repeat, against seconds since the last submission: unfinished orders (from the Order Service counters), unpublished Outbox rows and messages in the main queues (from the collector's samples). A dashed line marks a run whose dead-lettered orders waited for the 300 s reconciliation; those few orders do not show at this scale.

| Config. | Rate | Peak queue | Oldest (s) | Outbox peak | Drain (s) |
|---|---|---|---|---|---|
| C2 | 50 | 64 (61–83) | 1 (1–2) | 106 (30–110) | 0 |
| C2 | 100 | 1,647 (1,450–1,800) | 31 (27–33) | 2,347 (2,259–2,358) | 32 (31–38) |
| C2 | 200 | 5,956 (5,878–6,243) | 76 (74–77) | 8,188 (8,112–8,294) | 109 (108–115) |
| C3 | 50 | 77 (55–81) | 1 (0–1) | 174 (172–191) | 0 |
| C3 | 100 | 992 (941–1,011) | 15 (15–16) | 3,060 (2,974–3,341) | 49 (40–302) |
| C3 | 200 | 966 (965–1,004) | 17 (16–17) | 2,356 (2,241–2,376) | 313 (24–322) |
| C3 | 400 | 955 (945–962) | 17 (16–19) | 2,046 (1,990–2,210) | 318 (317–319) |
| C4, 1 cons. | 50 | 87 (82–94) | 1 | 109 (107–116) | 0 |
| C4, 1 cons. | 100 | 975 (916–1,002) | 16 (15–18) | 3,364 (3,154–3,448) | 309 (306–317) |
| C4, 1 cons. | 200 | 964 (964–1,001) | 16 (13–16) | 2,440 (2,123–2,736) | 306 (29–313) |
| C4, 1 cons. | 400 | 998 (902–1,013) | 16 (16–18) | 2,156 (1,994–2,228) | 303 (21–309) |
| C4, 2 cons. | 50 | 48 (26–80) | 1 (0–1) | 133 (123–272) | 0 |
| C4, 2 cons. | 100 | 645 (489–659) | 8 (5–8) | 4,025 (3,900–4,512) | 47 (46–328) |
| C4, 2 cons. | 200 | 666 (502–855) | 10 (8–11) | 3,206 (2,866–3,238) | 305 (33–305) |
| C4, 2 cons. | 400 | 935 (701–1,032) | 10 (3–11) | 2,028 (2,005–2,135) | 25 (24–29) |
| C4, 4 cons. | 50 | 35 (0–36) | 1 (0–1) | 296 (291–331) | 0 |
| C4, 4 cons. | 100 | 36 (0–39) | 1 (0–1) | 9,379 (7,796–9,618) | 306 (50–318) |
| C4, 4 cons. | 200 | 152 (0–217) | 2 (0–3) | 6,500 (5,850–6,565) | 328 (313–332) |
| C4, 4 cons. | 400 | 0 | 0 | 4,640 (4,331–4,700) | 332 (327–332) |

**Table 10.7.** – Backlog per cell (C2 to C4). Peak queue is the largest depth of the `OrderPlaced` queue (ready plus unacknowledged). Oldest is the age of its oldest message (s). Outbox peak is the largest number of unpublished Outbox rows, summed over Order Service and every Inventory replica. Drain is the matrix's drain time (s). Cells: median of 3 runs (range).

| Config. | Rate | Retries | Duplicates | Dead-lettered | Reconciliation |
|---|---|---|---|---|---|
| C2 | 50 | 0 | 166 (159–166) | 0 | 0 |
| C2 | 100 | 0 | 43 (38–69) | 0 | 0 |
| C2 | 200 | 0 | 307 (129–438) | 0 | 0 |
| C3 | 50 | 0 | 103 (84–107) | 0 | 0 |
| C3 | 100 | 316 (296–325) | 2,321 (2,147–2,378) | 6 (3–7) | 0 |
| C3 | 200 | 225 (139–227) | 1,072 (613–1,130) | 14 (0–22) | 8 (0–14) |
| C3 | 400 | 104 (101–125) | 347 (97–591) | 7 (2–9) | 7 (2–9) |
| C4, 1 cons. | 50 | 0 | 115 (112–117) | 0 | 0 |
| C4, 1 cons. | 100 | 345 (328–354) | 2,457 (2,270–2,462) | 8 (5–9) | 6 (2–6) |
| C4, 1 cons. | 200 | 217 (138–323) | 1,054 (421–1,763) | 14 (0–20) | 13 (0–13) |
| C4, 1 cons. | 400 | 122 (0–210) | 432 (79–769) | 13 (0–17) | 0 (0–17) |
| C4, 2 cons. | 50 | 0 | 149 (110–254) | 0 | 0 |
| C4, 2 cons. | 100 | 320 (300–364) | 2,738 (2,522–2,822) | 4 (0–6) | 0 (0–3) |
| C4, 2 cons. | 200 | 223 (222–249) | 1,846 (1,799–1,892) | 14 (10–21) | 0 (0–21) |
| C4, 2 cons. | 400 | 0 (0–124) | 844 (635–1,277) | 0 | 0 |
| C4, 4 cons. | 50 | 0 | 96 (63–150) | 0 | 0 |
| C4, 4 cons. | 100 | 315 (278–328) | 3,189 (3,187–3,269) | 5 (3–5) | 0 (0–2) |
| C4, 4 cons. | 200 | 270 (237–284) | 2,450 (2,261–2,587) | 22 (19–27) | 19 (0–27) |
| C4, 4 cons. | 400 | 106 (83–109) | 2,039 (1,948–2,078) | 11 (8–12) | 11 (8–12) |

**Table 10.8.** – What the reliability mechanisms did, as totals per run. Retries and duplicates are attempts absorbed by the Inbox, not business effects. Dead-lettered messages all came from the Process Worker (its own counter shows the same numbers). Reconciliation counts re-triggers and give-ups of the reconciliation job. Cells: median of 3 runs (range).

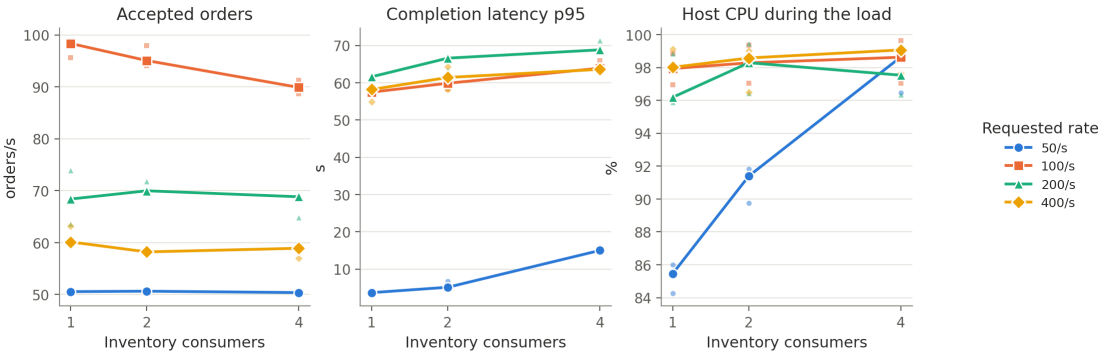



**Figure 10.2.** – C4 with 1, 2 and 4 Inventory consumers on one host: accepted orders per second, p95 completion latency and mean host CPU during the load. Each run is a small point and the median a line. All replicas share one machine, so this shows contention on that host, not multi-node scaling.

## 10.8 Resource Use

Table 10.10 shows the backend during the load window. C1 used 46–57 % CPU at 50 and 100/s and 88 % at 200/s. Every asynchronous configuration used 85–99 % already at 50/s, because more processes run: two services with Outbox publishers and consumers, the Worker, RabbitMQ and Redis. Redis answered in 0.04–0.06 ms on average, so the Lua reservation was never the bottleneck. Database connections peaked at 28–70, well below the limit of 200.

Table 10.9 splits the host CPU during the load window. Each .NET service exports its own CPU-seconds counter, sampled every 5 s; the share is its increase over the load window as a percentage of the two vCPUs, the same scale as the host figure. Whatever the services do not account for is the infrastructure: PostgreSQL, RabbitMQ, Redis, Nginx, the collector and the operating system, which the saved data measure only together. In every asynchronous cell the Order Service took 26–51 % of the host, Inventory 4–17 %, the Worker 2–6 %, and the infrastructure 39–51 %. C1 at 200/s used 88 %: 46 % in Order Service and 41 % in the infrastructure. At 50/s, where both keep up, C2 used 90 % of the host and C1 46 %.

## 10.9 Supplementary Runs

After the official matrix, one more session on 6 November ran 18 runs with the same frozen code and only command-line values changed (`docs/week14-supplementary-runs.md`): C1 at 400/s; a sell-out of 2,000 units at 200/s for C1, C2 and C3; the official C2 100/s cell as an anchor; and C2 at 400/s. Each ran three times, repeat-major, on a second host pair of the same types and AMI.

| Config. | Rate | Host | Order Svc. | Inventory | Worker | Infrastructure |
|---|---|---|---|---|---|---|
| C1 | 50 | 46 (37–47) | 20 (16–22) | 0 | 0 | 25 (20–26) |
| C1 | 100 | 57 (53–57) | 29 | 0 | 0 | 28 (24–28) |
| C1 | 200 | 88 (86–89) | 46 (45–46) | 0 | 0 | 41 (40–42) |
| C2 | 50 | 90 (87–90) | 31 (30–32) | 8 (7–8) | 5 | 46 (45–46) |
| C2 | 100 | 99 (98–99) | 34 (33–35) | 9 (9–10) | 6 | 49 (48–50) |
| C2 | 200 | 98 (97–99) | 49 (48–50) | 4 (4–5) | 2 | 43 (41–44) |
| C3 | 50 | 97 (96–98) | 42 (40–43) | 8 (7–8) | 4 (4–5) | 42 (41–46) |
| C3 | 100 | 97 (96–99) | 35 (34–36) | 11 | 6 (5–6) | 46 (43–48) |
| C3 | 200 | 98 (97–98) | 47 (46–48) | 6 | 3 | 42 (41–43) |
| C3 | 400 | 96 (94–98) | 51 (50–52) | 5 (4–6) | 2 (2–3) | 39 (33–41) |
| C4, 1 cons. | 50 | 85 (84–86) | 31 (30–31) | 7 | 5 (4–5) | 43 (41–43) |
| C4, 1 cons. | 100 | 98 (97–99) | 34 (33–34) | 11 | 6 (5–6) | 48 (46–48) |
| C4, 1 cons. | 200 | 96 (96–99) | 48 (46–48) | 6 (5–6) | 3 | 40 (39–44) |
| C4, 1 cons. | 400 | 98 (96–99) | 49 (49–50) | 4 (4–5) | 2 | 41 (41–43) |
| C4, 2 cons. | 50 | 91 (90–92) | 28 (27–29) | 12 (12–13) | 4 (4–5) | 46 (44–48) |
| C4, 2 cons. | 100 | 98 (97–99) | 34 | 14 (14–15) | 6 | 44 (43–45) |
| C4, 2 cons. | 200 | 98 (96–99) | 47 (46–47) | 7 (6–8) | 3 (3–4) | 41 (40–42) |
| C4, 2 cons. | 400 | 99 (96–99) | 50 | 4 (4–5) | 2 | 42 (40–43) |
| C4, 4 cons. | 50 | 99 (96–99) | 26 (26–27) | 17 (16–18) | 4 (4–5) | 51 (47–53) |
| C4, 4 cons. | 100 | 99 (97–100) | 33 (32–34) | 16 (15–20) | 5 (5–6) | 43 (40–48) |
| C4, 4 cons. | 200 | 98 (96–99) | 45 (45–46) | 8 (7–8) | 3 | 42 (39–43) |
| C4, 4 cons. | 400 | 99 (98–99) | 49 | 5 (5–6) | 2 | 42 (41–43) |

**Table 10.9.** – Where the CPU goes during the 60 s load, as % of the 2-vCPU host. Order Svc., Inventory (summed over its replicas) and Worker come from each process's own CPU-seconds counter; Infrastructure is the host CPU minus those three (PostgreSQL, RabbitMQ, Redis, Nginx, the collector and the OS). In C1 the Inventory Service and the Worker run but take no part, so they show 0. Cells: median of 3 runs (range).

| Config. | Rate | CPU in load % | CPU peak % | RAM (GB) | DB conns | Redis (ms) |
|---|---|---|---|---|---|---|
| C1 | 50 | 46 (37–47) | 73 | 2.6 | 28 | n/a |
| C1 | 100 | 57 (53–57) | 62 | 2.7 | 44 | n/a |
| C1 | 200 | 88 (86–89) | 96 | 2.9 | 63 | n/a |
| C2 | 50 | 90 (87–90) | 97 | 3.0 | 64 | 0.05 |
| C2 | 100 | 99 (98–99) | 100 | 3.2 | 64 | 0.06 |
| C2 | 200 | 98 (97–99) | 100 | 3.2 | 64 | 0.06 |
| C3 | 50 | 97 (96–98) | 100 | 3.1 | 47 | 0.05 |
| C3 | 100 | 97 (96–99) | 100 | 3.2 | 64 | 0.06 |
| C3 | 200 | 98 (97–98) | 100 | 3.3 | 64 | 0.06 |
| C3 | 400 | 96 (94–98) | 100 | 3.4 | 64 | 0.06 |
| C4, 1 cons. | 50 | 85 (84–86) | 95 | 3.1 | 32 | 0.04 |
| C4, 1 cons. | 100 | 98 (97–99) | 100 | 3.4 | 64 | 0.06 |
| C4, 1 cons. | 200 | 96 (96–99) | 100 | 3.4 | 64 | 0.06 |
| C4, 1 cons. | 400 | 98 (96–99) | 100 | 3.4 | 65 | 0.06 |
| C4, 2 cons. | 50 | 91 (90–92) | 100 | 3.4 | 47 | 0.04 |
| C4, 2 cons. | 100 | 98 (97–99) | 100 | 3.5 | 67 | 0.04 |
| C4, 2 cons. | 200 | 98 (96–99) | 100 | 3.6 | 66 | 0.05 |
| C4, 2 cons. | 400 | 99 (96–99) | 100 | 3.7 | 66 | 0.04 |
| C4, 4 cons. | 50 | 99 (96–99) | 100 | 4.0 | 70 | 0.04 |
| C4, 4 cons. | 100 | 99 (97–100) | 100 | 4.0 | 70 | 0.04 |
| C4, 4 cons. | 200 | 98 (96–99) | 100 | 4.1 | 70 | 0.04 |
| C4, 4 cons. | 400 | 99 (98–99) | 100 | 4.2 | 70 | 0.04 |

**Table 10.10.** – Backend host during each run. CPU in load is the mean host CPU over the 60 s load window; peak is the highest sample of the run. RAM is the peak host memory in use. DB conns is the peak number of PostgreSQL connections. Redis is the mean time per Redis command. Cells: median of 3 runs (range).

All 18 runs passed every validator check (Table 10.11). These runs are labelled supplementary and are never pooled with the 66 official runs: the anchor cell shows that the second host pair was slower (Appendix C.5).

**C1's ceiling.** Offered 400/s, C1 accepted 194.5–203.8 requests a second, about what it accepted at 200/s. Each client thread waits for its answer, so the requests queued instead: the API p50 rose to 1.9–2.0 s and the p95 to 2.8–3.0 s, with the host CPU 96 % busy (Order Service 48–50 %, the infrastructure 46–47 %). On this host C1 stops at about 200 requests/s. The data cannot tell whether the row lock or the CPU sets that limit, because both saturate at the same point.

**Sell-out under load.** With 2,000 units and 200/s for 60 s, every run of C1, C2 and C3 sold exactly 2,000 units and ended with stock 0. The validator found one reservation per order and no double deduction. The other accepted orders were rejected: 10,047–10,103 per run for C1, inside the request; 7,716–8,251 for C2 and 403–835 for C3, through the asynchronous stock-rejected path, each order ending in `Rejected` (accepted-order accounting). C3 admitted only 2,403–2,835 orders, because its admission control refused 6,576–7,239 requests per run with 503. This is the scarce-stock case the official matrix could not show, under load.

**C2 at 400/s.** C2 accepted every request, at 180.2–184.2 a second, with an API p95 of 2.7–2.9 s, and completed the orders with a p95 of 140–147 s; the backlog drained 134–148 s after the load. No message was dead-lettered. But many orders waited past the 120 s reconciliation timeout, so reconciliation re-triggered 190–971 orders per run, and every one completed. At 400/s C2 accepted fewer requests than C1, at about the same p95, so the asynchronous design did not overtake C1 at the higher rate either.

| Config. | Rate | Stock | Achieved | Accepted | API p95 (ms) | Sold | Rejected | Stock left | Completion p95 (s) | Checks |
|---|---|---|---|---|---|---|---|---|---|---|
| C1 | 400 | 100,000 | 197.7 | 11,962 (11,755–12,364) | 2,909 (2,799–2,994) | 11,962 | 0 | 88,038 | n/a | 3/3 |
| C1 | 200 | 2,000 | 201.1 | 12,083 (12,047–12,103) | 462 (187–561) | 2,000 | 10,083 (10,047–10,103) | 0 | n/a | 3/3 |
| C2 | 200 | 2,000 | 166.7 | 10,011 (9,716–10,251) | 1,623 (1,566–1,678) | 2,000 | 8,011 (7,716–8,251) | 0 | 71.7 (71.6–74.2) | 3/3 |
| C3 | 200 | 2,000 | 158.6 | 2,428 (2,403–2,835) | 2,613 (2,451–2,669) | 2,000 | 428 (403–835) | 0 | 60.6 (56.7–60.7) | 3/3 |
| C2 | 100 | 100,000 | 95.1 | 5,698 (5,514–5,753) | 1,400 (1,353–1,574) | 5,698 | 0 | 94,302 | 58.1 (55.1–61.7) | 3/3 |
| C2 | 400 | 100,000 | 182.7 | 11,052 (10,852–11,115) | 2,856 (2,737–2,875) | 11,052 | 0 | 88,948 | 142.2 (140.0–146.7) | 3/3 |

**Table 10.11.** – Supplementary runs, 6 November, on a second host pair (not pooled with the official tables). Accepted counts the 2xx responses, which equal the orders in the database in every run. Sold is the units reserved; Rejected is the accepted orders that got no unit; Stock left is the final stock. Completion is acceptance to the terminal state, for the asynchronous configurations. Checks counts the runs in which every validator check held. Cells: median of 3 runs (range); Achieved, Sold and Stock left show the median only. Source: `tests/evidence/20261106T135523Z-supplementary/`.

# 11 Discussion

This chapter answers the four questions of the scope (`docs/00-scope-lock.md`) from the official results in the Results chapter (Section 10.2 onwards), and states how far each answer goes. Every number below is from the 66 official runs unless another source is named.

## 11.1 Correctness under concurrency

*Does each valid implementation preserve the inventory invariants under concurrent requests?* Yes, in everything that was tested. All 66 official runs passed every validator check that applies to them, no unit was over-sold, and every accepted order reached a terminal state (Table 10.1). The deliberately unsafe C0 broke the same invariants at once (TP-B01), which shows the checks can fail.

The official matrix seeds 100,000 units, more than any run can sell, because it measures performance; it never makes the stock scarce. Scarce stock was tested separately, and the same rules held there: C1 with 50, 100 and 150 concurrent requests for 100 units (TP-B02), the Lua reservation with 400 concurrent requests for 100 units and with skewed demand over four products (TP-I02), and requests below, equal to and above the stock on the EC2 stack, where reservations always equalled the smaller of requests and stock (TP-X04). The supplementary sell-out repeated this under load: at 200/s against 2,000 units, every run of C1, C2 and C3 sold exactly 2,000 and ended with stock 0, and C2 and C3 rejected the rest through the asynchronous path (Section 10.9). Duplicate and redelivered messages never caused a second deduction (TP-M01, TP-M02), and the official runs absorbed between 38 and 3,269 duplicates per run (Table 10.8) with no effect on stock. The conclusion is limited to the failure modes those tests cover (Table 8.3).

## 11.2 C1 against C2: what the asynchronous design buys and costs

*How do C1 and C2 trade request latency, completion latency, throughput and complexity?* On this one 2-vCPU host the comparison favours C1 more than the usual argument for asynchronous designs would suggest.

**Request latency.** C1 acknowledged faster at every rate it was run at: p95 30–39 ms at 50 and 100/s against 199–739 ms for C2. The asynchronous path does not avoid the database: it still writes the order and its Outbox row in one transaction before it answers. And it runs four more processes (Inventory Service, the Worker, RabbitMQ and Redis) on the same two vCPUs, which were 90–99 % busy during C2's load (Table 10.10). The benefit asynchrony usually brings, a short request path because the slow work happens later, is cancelled here by CPU contention from that later work on the same machine.

**Completion.** C1 finishes the order inside the request. C2 finishes it later: p95 4.3 s at 50/s, about 48 s at 100/s and 120 s at 200/s, because it accepts faster than it completes and builds a backlog. The C2 stage split shows where that backlog sits: in the Outbox, between acceptance and publication (Table 10.4). The publisher already claims 50 rows at a time and waits for their confirms together, so it is not a per-message confirm that limits it. It is one serial loop per service in the same process as the API, and during C2's load at 200/s only about 4 orders a second completed (Table 10.5); the backlog was worked off only after the load stopped.

**Throughput.** C1 accepted and decided 199 requests a second at 200/s. C2 accepted 168 a second there, limited by its own latency and the plan's thread cap, and completed only about 50–66 orders a second at any rate. For the hot product, the conditional `UPDATE` on one row was not the bottleneck at these rates: its p95 rose to 919 ms at 200/s, the first sign of lock contention, but it still kept up. The study therefore found no rate at which C2's Redis reservation pays for its extra machinery on this hardware. The supplementary runs found that limit on a second, somewhat slower host (Section 10.9). Offered 400/s, C1 still accepted about 200 requests a second, at a p50 of about 2 s, with the host CPU 96 % busy. The row lock and the CPU cannot be told apart as the cause there. C2, offered the same 400/s on that host, accepted about 183 a second at the same p95, so a higher rate did not turn the comparison either.

**Complexity.** C1 is one service and one table. C2 adds two more services, a broker, Redis, an Outbox and an Inbox in each service, bounded retries, dead-letter queues and a reconciliation job; the failure-mode table lists 22 cases it has to handle (Table 8.3). What C2 buys for that is decoupling: an order is accepted when Inventory or the Worker is slow or down, and the work is done later without being lost, which C1 cannot do. The official runs show that guarantee holding under load (every accepted order completed), and they also show its price in latency and CPU.

## 11.3 Why C1 wins on this host, and when the asynchronous design would

The CPU split (Table 10.9) shows why C1 wins here. Both designs spend most of their CPU in the Order Service and in the infrastructure, but C2 does more work per order: PostgreSQL writes the order, its Outbox row, Inbox rows and status history; RabbitMQ carries several messages per order; and three .NET processes run instead of one. At 50/s, where both keep up, C2 used 90 % of the host against C1's 46 %, about twice the CPU per order. C1 also does less: it has no processing stage, so the Worker's 200 ms step is not part of its path at all.

At 100/s and above the two vCPUs are saturated, and the asynchronous pipeline then starves itself. The API, the Outbox publisher and the result consumers share the Order Service process, and the infrastructure shares the rest. The API wins that contention, because every request waits for it: orders are accepted at the offered rate while only 4–30 a second complete (Table 10.5), and the backlog clears only when the load stops. Decoupling acceptance from processing, which is the point of the design, here means that processing gets what is left.

None of the conditions under which the asynchronous design is expected to win was present in this study, so these are expectations, not findings:

- **Slow or remote work after acceptance.** If the Worker's step were part of a synchronous request (a payment call, for example), C1 would hold a request thread and a database connection for it; C2 answers once the order is durable.
- **Separate hosts.** With the database, broker and Redis on their own machines, the infrastructure's 39–51 % would no longer come out of the API's CPU, and Inventory replicas would add cores instead of contention.
- **Contention beyond the row lock.** C1's p95 rose to 919 ms at 200/s, the first sign of queueing on the hot row. Above the rate at which that lock serialises

requests, C1's latency grows with every request, while the Redis reservation stays at about 0.05 ms. On this hardware the host's CPU saturates at about the same rate as the lock (Section 10.9), so this case did not arise.

- **A slow or unavailable downstream.** C2 keeps accepting while Inventory or the Worker is slow or down, and finishes the work later (Table 8.3); C1 cannot.

## 11.4 Overload control

*At overload, do the C3 controls reject excess work predictably and recover after the load falls?* Yes, at the tested rates on this host. At 200 and 400/s, C3 and C4 refused 63–65 % and 83–84 % of requests, every refusal a 429 from the gateway or a 503 with `Retry-After`, and never another error (Table 10.5). Refusal kept the backlog bounded: about 3,000–3,700 unfinished orders at the end of the load, against 9,800 for C2 at 200/s, and 99 % of them were done 36–51 s later, against 124 s for C2 (Table 10.6). No service restarted.

The experiment also found a defect. The queue bound and the Worker's bounded publish retries together dead-letter a few messages per run when a queue stays full longer than the retries last (2–27 per run). Those orders complete only through reconciliation, after its 300 s timeout for `Confirmed` orders, so most C3 and C4 overload runs reach a fully stable state only after about 300–330 s. Nothing is lost, but reconciliation became a routine recovery path, which the brief rules out: it is meant as a safety net, not a substitute for retries and the dead-letter queue. The fix belongs at the Worker, in order of preference:

1. **Back-pressure.** Treat a refused publish (a negative confirm from a full queue) as "wait", not as a failure: stop taking new `StockReserved` messages and retry the publish until the queue has room, so the bound slows the Worker instead of making dead letters.

2. **A longer retry ladder** for that one cause, long enough to outlast a full queue (the bulk backlog clears in under a minute).

3. **A shorter `Confirmed` timeout** for reconciliation. This shortens the tail but keeps reconciliation in the normal path, so it treats the symptom.

None was implemented. The code was frozen before the official runs (Appendix F), and changing it would have meant measuring a different system from the one the 66 runs describe.

## 11.5 Consumer replicas on one host

*How do 1, 2 and 4 Inventory consumers on one host affect throughput, drain and contention?* They did not improve anything measured. At 100/s the accepted rate fell slightly as consumers were added (98 to 90 a second) and the p95 completion rose (57 to 64 s); at 50/s four consumers made completion four times slower than one (3.7 to 15 s at p95). The host's CPU was already 96–99 % busy at 100/s and above, so each replica is one more process competing for the same two vCPUs. Inventory was not the stage that limited the pipeline (the Outbox and the Worker were), so more Inventory consumers had nothing to speed up. This is the shared-resource contention the brief asks C4 to expose. It says nothing about replicas on separate machines, where the same change could behave differently.

## 11.6 The 2,000 attempts per second target

The brief sets an initial target of about 2,000 reservation attempts a second for the chosen hardware. The study reached about 200 requests a second at the API and 50–66 completed orders a second, an order of magnitude below it, and reports that as a result with its hardware rather than scaling the hardware (Section 9.4). The measurements point to where the limit lies. Redis was never the limit: its commands took 0.04–0.06 ms on average. The limits were the host's two vCPUs, shared by every component (Table 10.9), and the Order Service process, which runs both the API and the Outbox publisher's serial batch loop. Reaching the target would need some combination of more cores or separate hosts for the database, the broker and the services, and a publisher that does not share its CPU with the API, or several publishers claiming in parallel (the claim already uses `SKIP LOCKED`). None of these was tested, so this is a direction, not a finding.

## 11.7 Threats to validity

- **One session, one host pair.** All 66 runs ran on one backend and one JMeter host on one day, so the comparison between configurations is fair, but a different host or AMI could shift every number. The supplementary session on another pair of the same type and AMI found the same cell about 5 % slower in achieved rate and up to twice as slow in latency (Appendix C.5), so absolute numbers depend on the host. That is why the supplementary runs are not pooled.

- **Three repeats, 60 s each.** The ranges in the tables are narrow for most cells, but three runs cannot show rare events. The drain, in particular, is bimodal: a run either has dead letters or not, and three repeats only show that both outcomes occur, not how often.
- **The offered rate.** In open mode each of $\max(20, r)$ threads waits for its response, so a slow backend lowers the rate it is offered. C2 at 200/s reached 168/s for this reason. Every table reports the rate achieved, not the rate requested.
- **One workload in the matrix.** The official matrix is steady load on one hot product. The other profiles of the brief were run as coverage (TP-X04), once each and at low rates, not compared across configurations.
- **Two clocks for draining.** The matrix's drain clock starts when its post step begins, a few seconds after the last submission, and the collector samples every 5 s; recovery times are accurate to a few seconds.
- **The CPU split is partial.** The three .NET services are measured from their own counters; PostgreSQL, RabbitMQ, Redis and Nginx only together, as the rest of the host figure. The split shows that the infrastructure takes about half the host, not which part of it.

# 12

# Conclusion

This project built and measured an event-driven flash-sale backend against a synchronous PostgreSQL baseline, as the brief asks. The asynchronous design uses a Transactional Outbox, an atomic Redis Lua reservation, RabbitMQ with publisher confirms, idempotent consumers with an Inbox, bounded retries, dead-letter queues, reconciliation and three layers of load shedding. Both designs were deployed on AWS EC2 with Terraform and measured with JMeter from a separate host, in 66 validated runs of a frozen matrix.

The main findings, each limited to this hardware and workload:

1. Every configuration kept every inventory invariant, under load and in the separate scarce-stock and duplicate-message tests, including a sell-out of 2,000 units at 200/s; no unit was ever over-sold and no accepted order was lost.

2. On one 2-vCPU host the synchronous atomic update was faster for the client at every tested rate and kept up to 200 requests a second, which is also where it stopped when offered 400. The asynchronous design accepted the same load but completed only 50–66 orders a second: it spent about twice C1's CPU per order, and once the host was saturated its Outbox publisher, sharing the Order Service process with the API, completed only 4–30 orders a second during the load.

3. Load shedding worked as designed: excess requests were refused early with 429 or 503, the backlog stayed bounded, and 99 % of it cleared within a minute after the load. A few dead-lettered orders per overload run then waited about 300 s for reconciliation, a defect found by the experiment: the Worker needs back-pressure on a full queue, not a short retry ladder.

4. More Inventory consumers on the same host added contention, not capacity.

The asynchronous design's value here is decoupling and the guarantee that accepted work is never lost, not speed. Its speed would need more hardware than one small host, a publisher that does not share the API's CPU, and replicas on separate machines. Those are the natural next steps; this study measured the single-host case the brief defines and reports its limits as found.

# References


[1] ABP.IO. *ABP Documentation*. https://abp.io/docs/latest. Accessed 5 November 2026.

[2] Amazon Web Services. *Amazon EC2 M7i and M7i-flex instances*. https://aws.amazon.com/ec2/instance-types/m7i/. Accessed 5 November 2026.

[3] Amazon Web Services. *AWS Systems Manager Run Command*. AWS Systems Manager User Guide. https://docs.aws.amazon.com/systems-manager/latest/userguide/run-command.html. Accessed 5 November 2026.

[4] Apache Software Foundation. *Apache JMeter User's Manual: Component Reference*, section Constant Throughput Timer. https://jmeter.apache.org/usermanual/component_reference.html#Constant_Throughput_Timer. Accessed 5 November 2026.

[5] J. Dean and L. A. Barroso. The tail at scale. *Communications of the ACM*, 56:74–80, 2013. https://research.google/pubs/the-tail-at-scale/.

[6] A. Forero Cuervo. Handling overload. In *Site Reliability Engineering*, chapter 21. Google and O'Reilly Media, online edition 2017. https://sre.google/sre-book/handling-overload/. Accessed 5 November 2026.

[7] HashiCorp. *Terraform* (source repository). https://github.com/hashicorp/terraform. Accessed 5 November 2026.

[8] G. Hohpe and B. Woolf. *Enterprise Integration Patterns: Designing, Building, and Deploying Messaging Solutions*. Addison-Wesley, 2003.

[9] G. Hohpe and B. Woolf. Dead Letter Channel. https://www.enterpriseintegrationpatterns.com/patterns/messaging/DeadLetterChannel.html. Accessed 5 November 2026.

[10] G. Hohpe and B. Woolf. Idempotent Receiver. https://www.enterpriseintegrationpatterns.com/patterns/messaging/IdempotentReceiver.html. Accessed 5 November 2026.

[11] M. Kleppmann. *Designing Data-Intensive Applications*. O'Reilly Media, 2017. https://dataintensive.net/.

[12] Microsoft. *What's new in .NET 10*. Microsoft Learn, 2025. https://learn.microsoft.com/en-us/dotnet/core/whats-new/dotnet-10/overview. Accessed 5 November 2026.

[13] nginx. *Module ngx_http_limit_req_module*. https://nginx.org/en/docs/http/ngx_http_limit_req_module.html. Accessed 5 November 2026.

[14] PostgreSQL Global Development Group. *PostgreSQL 16 Documentation*, section 13.2, Transaction Isolation. https://www.postgresql.org/docs/16/transaction-iso.html. Accessed 5 November 2026.

[15] PostgreSQL Global Development Group. *PostgreSQL 16 Documentation*, section 13.3, Explicit Locking. https://www.postgresql.org/docs/16/explicit-locking.html. Accessed 5 November 2026.

[16] PostgreSQL Global Development Group. *PostgreSQL 16 Documentation*, SELECT (the locking clause). https://www.postgresql.org/docs/16/sql-select.html. Accessed 5 November 2026.

[17] RabbitMQ. *Consumer Acknowledgements and Publisher Confirms*. https://www.rabbitmq.com/docs/confirms. Accessed 5 November 2026.

[18] RabbitMQ. *Dead Letter Exchanges*. https://www.rabbitmq.com/docs/dlx. Accessed 5 November 2026.

[19] RabbitMQ. *Queue Length Limit*. https://www.rabbitmq.com/docs/maxlength. Accessed 5 November 2026.

[20] RabbitMQ. *.NET Client API Guide*. https://www.rabbitmq.com/client-libraries/dotnet-api-guide. Accessed 5 November 2026.

[21] Redis. *EVAL* (command reference). https://redis.io/docs/latest/commands/eval/. Accessed 5 November 2026.

[22] Redis. *Scripting with Lua*. https://redis.io/docs/latest/develop/programmability/eval-intro/. Accessed 5 November 2026.

[23] C. Richardson. *Microservices Patterns*. Manning Publications, 2018.

[24] C. Richardson. Pattern: Idempotent Consumer. https://microservices.io/patterns/communication-style/idempotent-consumer.html. Accessed 5 November 2026.

[25] C. Richardson. Pattern: Transactional outbox. https://microservices.io/patterns/data/transactional-outbox.html. Accessed 5 November 2026.

[26] B. Schroeder, A. Wierman, and M. Harchol-Balter. Open versus closed: a cautionary tale. In *Proceedings of the 3rd USENIX Symposium on Networked Systems Design and Implementation (NSDI '06)*, 2006. https://www.usenix.org/conference/nsdi-06/open-versus-closed-cautionary-tale.

# A

# Test Plan Summary

The full test plan is `docs/test-plan.md`. For every case it gives the inputs, the expected result, the command, the status and the saved evidence. A case is PASS only when its evidence file is committed and shows the pass; `scripts/verify-test-plan.ps1` enforces that rule. Table A.1 counts the cases by area.

| Area | Cases | PASS | NOT RUN |
|---|---|---|---|
| Environment and build | TP-E01–E04 | 4 | 0 |
| Baseline (C0, C1) | TP-B01–B04 | 4 | 0 |
| Documentation consistency | TP-D01–D04 | 4 | 0 |
| Order API (Week 5) | TP-A01–A07 | 7 | 0 |
| Outbox and publication (Week 6) | TP-O01–O02 | 2 | 0 |
| Inventory reservation (Week 7) | TP-I01–I03 | 3 | 0 |
| Workflow and correctness (Week 8) | TP-W01–W04 | 4 | 0 |
| Delivery semantics (Week 9) | TP-M01–M03 | 3 | 0 |
| Failure handling (Week 10) | TP-F01–F03 | 3 | 0 |
| Worker and observability (Week 11) | TP-P01–P08 | 8 | 0 |
| Overload, deployment and experiments (Weeks 12–14) | TP-L01–L08, TP-X01–X13 | 21 | 0 |
| Total | 63 | 63 | 0 |

**Table A.1.** – Test cases by area. Every case has passed with committed evidence; the last, the supplementary EC2 session (TP-X13), ran on 6 November 2026.

# B

# Implementation Verification Detail

This appendix holds the verification detail that the Implementation chapter summarises: the verifier overview, the evidence, findings and negative control of the main workflow, the Process Worker and observability verifiers, and the first overload run.

## B.1 Verification Summary

Figure B.1 summarises the runtime verifiers' latest results; the counts are read from the saved logs by the chart script, not typed in. Each verifier starts its own throwaway broker and Redis against a throwaway verification database, and all of them were run again on the final code after the review fixes. Each was checked, when it was built, with a negative control that must make it fail, and every fix in Section D has one too.

## B.2 The main workflow: evidence

**What the code check found.** The earlier diagrams did not match the code in five places:

- They drew Nginx in front of Order Service, but Nginx forwards nothing yet.
- They drew a plain publish and confirm, without the required-queue check and the `mandatory` flag added in Week 6.
- They left out the Inbox steps.
- They left out the Week 7 warm-up gate (`NOT_OPEN`).
- They drew the two consumers of `StockReserved` one after the other, although they run concurrently.

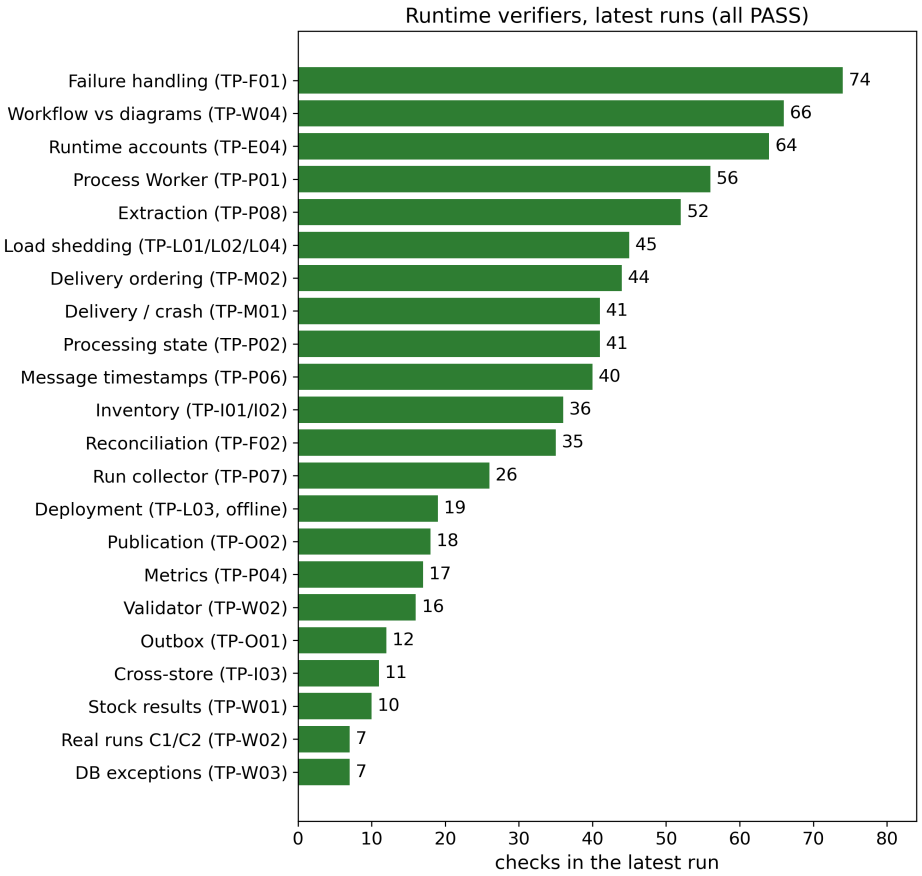



**Figure B.1.** – Checks per runtime verifier in its latest run (no failures), plus 98 unit tests. Test-case IDs refer to `docs/test-plan.md`; each PASS links to a saved log in `tests/evidence/`.

This section had the same problem. It described a handler that nacked with requeue and "no DLQ yet". Both points have been out of date since the Week 10 retry and DLQ code. The diagrams and the text are now rewritten from the code.

**The concurrent fork.** The two `StockReserved` consumers are independent. If `OrderProcessed` reaches Order Service before step 22 commits, the order is still `PendingStock`. The transition to `Completed` is not yet legal. Until Week 9 the message was then dead-lettered. Now Order Service writes nothing for it, republishes it onto a delayed retry queue (2, 4, then 8 s) and applies it once the order is `Confirmed` (TP-M02).

**Evidence** (TP-W04; fresh clone; `tests/evidence/20261002T152659Z-workflow.log`). The verifier passes its 35 static checks. Each check is tied to the code or configuration. For example:

- Each event's drawn required queues must equal the `RequiredSubscriberQueues` setting.
- The drawn processing delay must equal the configured one.
- The diagram files in `report/figures/` must be identical to the diagrams in the document.

The previous diagrams fail 20 of these checks. Changing one setting, such as the publish flag, the worker delay or a required queue, fails exactly one check.

The live part ran Order Service, Inventory Service and the Process Worker on a throwaway RabbitMQ and Redis, with three orders:

- **A reserved order.** A client replay of the same key returned `200` with the same order. The order reached `Completed`. Its rows appeared in the drawn order: the Order Outbox row, then Inventory's Inbox and Outbox rows, then `Confirmed` with its Inbox row, then `Completed` with the Inbox row whose `MessageId` is the order id. Redis deducted one unit.
- **A sold-out order.** `REJECTED`, then `Rejected`. Nothing was deducted, and the Process Worker never saw it.
- **An order for a product that was never warmed up.** `NOT_OPEN`, then `Rejected`. No Redis key was created.

At the end, every queue and every DLQ was empty (27 of 27 live checks). Only orderings that cause and effect guarantee are compared, because a publisher marks a row published only after the confirm returns. Reconstructing the same path from the three services' logs by `CorrelationId` is the Week 11 trace (TP-P03).

**Negative control.** To rule out a false pass, the same live run was repeated with one deliberate break: the Process Worker was configured to require a queue that does not exist before publishing `OrderProcessed`. The verifier then failed 6 checks, all on the broken steps. The order stayed `Confirmed`, the completion step and its logs were missing, and the message was in `ProcessWorker.StockReserved.dlq` (`20261002T152659Z-workflow-negative-control.log`).

## B.3 Process Worker and observability: verification

**Verification (TP-P02).** The unit tests (90 at that point) cover:

- the transition table;
- every 5-event sequence over the three Worker-facing events, 150 in total, each ending `Completed` with the four-step history;
- the clamped, kept and missing start times;
- the `Seq` order.

`scripts/verify-processing.ps1` runs all three services and covers these cases:

- normal orders by either legal path;
- a deterministic direct path, with the derived start id;
- duplicates, which change nothing;
- the late start event, which gives an implied row clamped to the confirmation time, then a no-op;
- 10 orders on the implied path, all in `Seq` order;
- Worker events while `PendingStock`, which are requeued and then applied;
- no `ProcessingFailed` anywhere;
- a poison start event, which goes to its DLQ.

The fresh-clone run passed all 41 checks (`tests/evidence/20261013T145229Z-processing.log`). A negative control that writes the implied row as not implied fails two checks, and the script exits 1.

**A restart defect found and fixed.** The code check found that a *graceful* shutdown of the Worker (Ctrl+C, or SIGTERM from `docker stop`) dead-lettered accepted work. Stopping the host cancels the processing delay. The cancellation was caught as a failed attempt, the retry wait then threw again, and the message was nacked to the DLQ. The broker had already pushed every queued message to the Worker, so each of those failed the same way. A throwaway prototype with 10 queued orders dead-lettered 9 of them on one Ctrl+C. Now a cancellation caused by shutdown is not a failed attempt. The message is left unacknowledged, so the closing channel returns it to the queue, and one Information line names the order. Real failures still take the 1/2/4 s ladder to the DLQ.

**Verification (TP-P01).** `scripts/verify-worker.ps1` runs all three services on a throwaway broker and Redis (`docs/process-worker.md`). It covers seven cases:

- **Deterministic success.** With a 500 ms delay, 5 orders complete. Each Worker duration is at least 500 ms; the measured values were 517–643 ms. Each applied completion has `MessageId = OrderId`.
- **Replay with the same identity, a duplicate with a new `MessageId`, and 5 concurrent copies.** The Worker repeats the work, and its attempt counter rises by the number of copies. Order Service still has one completion Inbox row, an unchanged `CompletedAt`, and no dead letter. Attempts and applied results are counted separately.
- **Graceful restart (a real Ctrl+C) and a crash.** Each restart happens with 5 orders in flight. The DLQ stays empty and the Worker logs no DLQ routing or error. After the restart, all 5 orders complete with one applied completion each.
- **Reordering.** A completion that arrives while the order is still `PendingStock` is requeued, not dead-lettered. It is applied exactly once after the stock result, with `ConfirmedOrRejectedAt` $\leq$ `CompletedAt`. A late stock result after completion is a no-op.

The fresh-clone run passed all 51 checks (`tests/evidence/20261011T160720Z-worker.log`). With the shutdown fix reverted, the Worker logged 5 DLQ routings and 5 errors during shutdown, and the script exited 1. The dead-letter count alone was not a reliable signal: the reverted Worker's rejections sometimes reached the broker after the channel had closed, and those messages were requeued anyway. So the check reads what the Worker did, not only where the messages ended up.

**A test defect found and fixed.** A later fresh-clone run failed the graceful-restart case although the Worker was correct. The cause was Windows: a script started from Git Bash or a background task runs with Ctrl+C ignored, and the Worker inherited that. The test's Ctrl+C call then succeeded, but no Ctrl+C reached the Worker. The same run exposed a second defect: the check for the Worker's shutdown line searched the whole log file, so a line from an earlier run made it pass. Now the script turns Ctrl+C back on before it starts the Worker. It proves delivery from the Worker's own "Application is shutting down" line, and it reads only the log lines written after the Ctrl+C. Started from Git Bash, the fixed script passed all 51 checks twice, and then again from a fresh clone on a fresh database (`tests/evidence/20261014T090016Z-worker.log`). Without the Ctrl+C fix it fails the delivery check, the exit check and the shutdown-line check, and exits 1.

**Verification (TP-P03).** `scripts/trace-order.ps1` places three orders, each with its own `X-Correlation-Id`:

- one that completes;
- one that Inventory rejects;
- one that completes after a recovered fault, with Order Service's Inbox `INSERT` grant revoked for about 3 s.

For each order it searches the three JSON logs for that one id and checks that:

- every expected hop is present, each line tagged with its service;
- the `MessageId`s link up: the id in each Outbox row is the id the next consumer logs;
- every stage timestamp is present and ordered (acceptance $\leq$ publication, and acceptance $\leq$ decision $\leq$ applied $\leq$ completion);
- the history, read by `Seq`, and the API's polling response agree.

The completed order from the fresh-clone run reads (ids shortened):

```
OrderService     16:33:12.38  Executing endpoint
↪  'OrdersController.CreateOrderAsync'
InventoryService 16:33:14.81  Received OrderPlaced 6eeb0972-... for order
↪  32fe1f82-...
InventoryService 16:33:15.19  OrderPlaced 32fe1f82-... for product tr-163219 ->
↪  Reserved
OrderService     16:33:16.49  Received StockReserved 631ba675-... for order
↪  32fe1f82-...
```

```
OrderService     16:33:16.60  Order 32fe1f82-... -> Confirmed
ProcessWorker    16:33:16.84  Received StockReserved 631ba675-... for order
↪  32fe1f82-...; starting downstream processing
OrderService     16:33:16.96  Received OrderProcessingStarted 24eaf83a-... for
↪  order 32fe1f82-...
OrderService     16:33:16.98  Order 32fe1f82-... -> Processing
OrderService     16:33:17.28  Received OrderProcessed 32fe1f82-... for order
↪  32fe1f82-...
ProcessWorker    16:33:17.30  Order 32fe1f82-... processed in 434ms; published
↪  OrderProcessed
OrderService     16:33:17.30  Order 32fe1f82-... -> Completed
```

Three details in this trace are worth explaining:

- Order Service and the Worker log the same `StockReserved` id (`631ba675`), because the exchange copies one message to both queues.
- The `OrderProcessed` id is the order id, which is the idempotency design above.
- Order Service logs receiving `OrderProcessed` 20 ms before the Worker logs publishing it. This is not a clock error. The Worker writes its line after the broker's confirm returns, but the broker delivers the message as soon as it routes it. For the same reason, an Outbox row is marked published only after the confirm. In the fault trace, taken while `PublishedAt` still held the confirm time, the `OrderPlaced` row's `PublishedAt` came 1.1 ms after Inventory's decision. It now holds the send time (Section D). The script prints such a case as an anomaly and does not count it as a failure (`docs/metrics.md`).

In the fault trace, both of the Worker's events arrived while the order was still `PendingStock`. They were requeued, and the order ended `Completed` with the full four-step history once the grant came back. The fresh-clone run passed all 28 checks (`tests/evidence/20261013T163219Z-trace.log`). A negative control that drops the `MessageId` from the Worker's `Received` line fails four checks: the missing Worker hop and the broken `MessageId` link, in both the success trace and the fault trace. The script exits 1.

**Verification (TP-P04).** `scripts/verify-metrics.ps1` reads each service's `/metrics` before and after eight cases. It checks that each case moved the expected series by the expected amount:

- three normal orders: accepted, completed, reserved and Worker attempts each $+3$;

- a stock rejection: both rejection counters $+1$;
- a duplicate `StockReserved`: duplicates $+1$, and the confirmed count unchanged;
- a transient Inbox fault: retries $\geq 1$, no new dead letter, and the order completes;
- a poison message: `dead_lettered{invalid}` $+1$;
- an early completion: requeued-early $\geq 1$;
- a paused broker: the Outbox gauges rise while it is paused and return to 0 afterwards;
- a Worker replay: attempts $+1$, but still one completion Inbox row.

It then checks that each service exports every metric the dictionary lists for it (13, 8 and 7), and that no label value is an id. The fresh-clone run passed all 17 checks (`tests/evidence/20261013T163454Z-metrics.log`). A negative control that stops counting duplicate stock results fails case C (duplicates $+0$), and the script exits 1.

## B.4 Overload, drain and recovery before the pilot

**Scenario.** Test case TP-L04 drives the full C3 stack through Nginx with a three-phase JMeter plan (`tests/jmeter/overload-recovery.jmx`): 30 s at 3 orders/s (baseline), 60 s at 60 orders/s (overload), and 60 s back at 3 orders/s (recovery). Every limit is on: Nginx at 20 requests/s with a burst of 1, admission at 8 concurrent new orders and an Outbox backlog of 20, and a queue bound of 5. These values are local and pre-pilot; the Week 13 pilot fixes the official ones. The baseline rate is deliberately below the slowest stage: the Process Worker spends a fixed 200 ms per order, and the run measured it at about 3.7 orders/s. At 5 orders/s, an earlier run showed its in-flight backlog still growing during "recovery", so that phase could not show a return to a stable state.

**What is measured.** The Week 11 collector samples the queues, the Outbox and the services during the run, and the extraction script turns them into numbers. The *backlog drain after overload* is the time from the end of the overload phase until all queued work (both services' unpublished Outbox rows and the main queues' ready and unacknowledged messages) is back at its baseline level, while recovery load continues. The *final drain* is the time from the last submission until

every queue, the Outbox and every pending order are empty. The *recovery time* runs from the start of the recovery phase to the first 10 s window whose requests are back in range: no refusals, no errors, p95 at most 1 s, and at least one accepted order per second. The review after Week 12 tightened both the backlog and the recovery definition; the earlier ones missed the Worker's backlog and could count a phase that refused everything as recovered.

**Preliminary observations (local PC, one run each).** Table B.1 compares three local runs and two EC2 runs. The first local run (22 October) passed every check of the time: the 2,390 refusals logged by Nginx and the 832 counted by the admission metric matched JMeter exactly, all 773 accepted orders completed with one unit of stock each, and no service restarted. Its 3.9 s backlog drain, however, missed the Process Worker's backlog. Once every consumer set a prefetch and all queued work was counted (second run), the real picture showed: Order Service accepted about 13 orders/s during the overload while the Worker finishes about 3.7/s, orders took about 40 s from acceptance to completion, and the backlog took 105 s to clear, failing the 60 s target. The Worker's bounded queue also held back Inventory's result to Order Service, so orders sat in `PendingStock` for about 32 s. With the in-flight bound at the database baseline plus 30 (third run), Order Service refuses what the Worker cannot finish (Figure B.2): 548 orders were accepted, each completed in about 6 s (p95 6.8 s), the backlog cleared in 6.9 s, and all 45 checks passed (`tests/evidence/20261023T144923Z-load-shedding.log`, with the run's raw JTL, samples and summary saved beside it). With the in-flight check removed from the code, its case fails and the backlog drain is 105 s again (`tests/evidence/20261023T145745Z-load-shedding-negative-inflight-off.log`). In every run the refusals matched JMeter, the Nginx log and the admission metric exactly, no sampled refused key left an order, and every accepted order completed with exactly one unit of stock. With every limit switched off, 3,747 orders got in and the backlog had not drained when the case gave up, so the test detects missing limits.

**Repeat on the EC2 deployment (preliminary, one run, earlier code).** The same plan and limits ran on the EC2 stack deployed with the Week 12 Terraform and Compose files, with JMeter on its own `c7i-flex.large` host and the backend on an `m7i-flex.large`. Of 4,029 order submissions, Nginx refused 2,411 with 429 and the admission limits 720 with 503; both counts matched JMeter exactly, and ten sampled refused keys of each kind had no order row. All 898 accepted orders completed, stock fell from 10,000 to 9,102 and the validator passed C3. Everything had drained 48 s after the last submission, the recovery phase had no

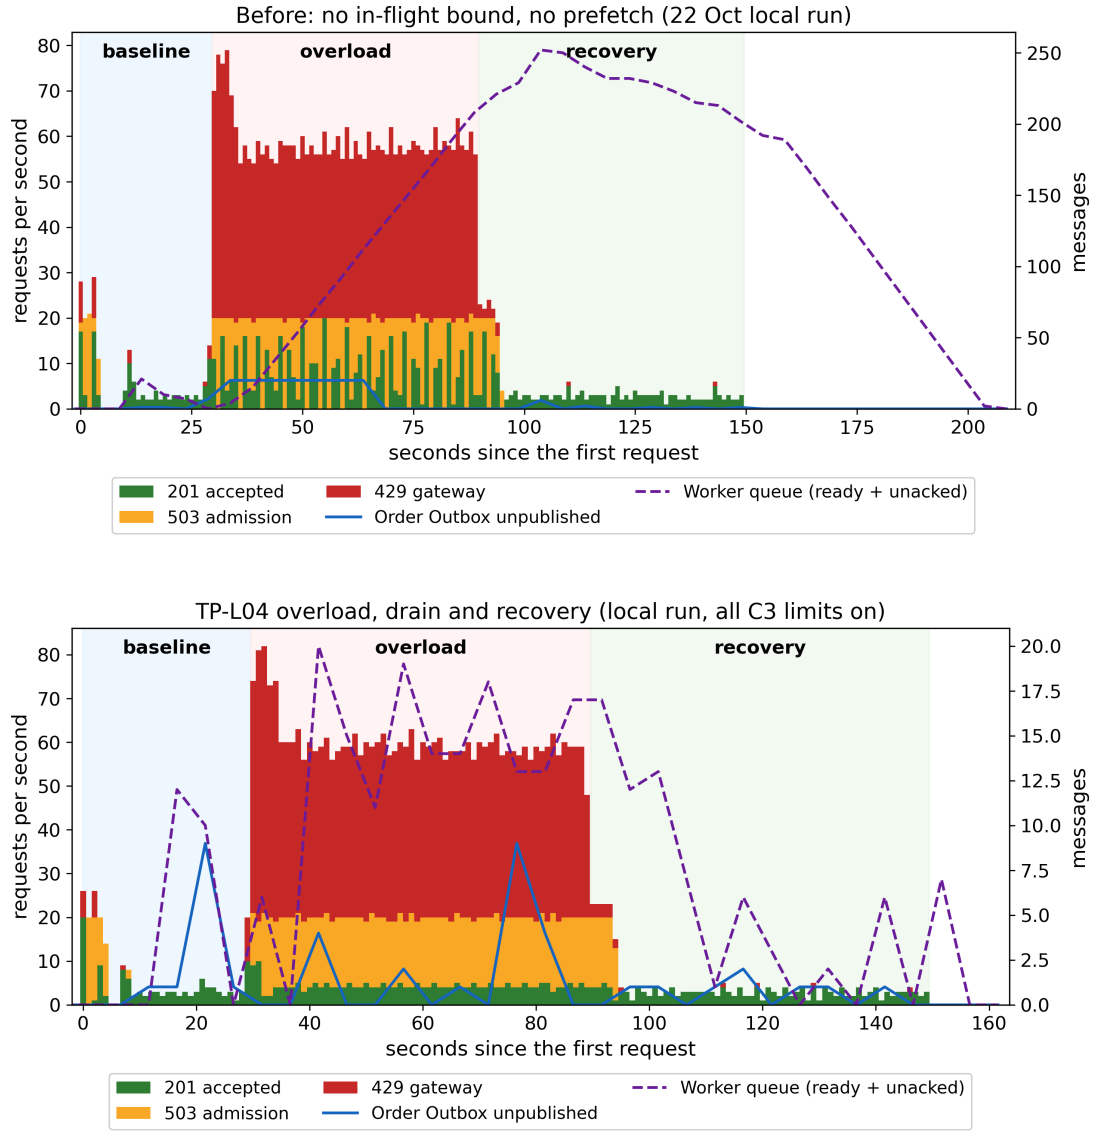



**Figure B.2.** – TP-L04, local runs before (top) and after (bottom) the review fixes. Bars: requests per second by outcome (accepted, admission 503, gateway 429). Lines: the Order Outbox backlog and the Process Worker's queue (ready + unacknowledged; note the different scales). Before, the Worker's queue grew to about 250 and drained only after the load stopped; after, it stays below 20 and the run settles within seconds. Data: `tests/evidence/20261022T152931Z-overload-*` and `tests/evidence/20261023T144923Z-overload-*`; chart: `report/figures/plot_week12.py`.

| TP-L04 run (pre-pilot) | Local 22 Oct (before) | Local 23 Oct (+ prefetch) | Local 23 Oct (+ in-flight) | EC2 22 Oct (before) | EC2 24 Oct (after) |
|---|---|---|---|---|---|
| Order submissions (3 phases) | 3,995 | 4,027 | 4,084 | 4,029 | 4,069 |
| Refused by Nginx (429) | 2,390 | 2,403 | 2,464 | 2,411 | 2,445 |
| Refused by admission (503) | 832 | 816 | 1,072 | 720 | 1,042 |
| Accepted and completed | 773 | 808 | 548 | 898 | 582 |
| Lost orders / extra stock | 0 / 0 | 0 / 0 | 0 / 0 | 0 / 0 | 0 / 0 |
| Accepted to Completed p50/p95 | 38 / 64 s | 40 / 66 s | 6.1 / 6.8 s | – | 5.5 / 6.1 s |
| Backlog drain after overload | 3.9 s[a] | 105 s | 6.9 s | 2.4 s[a] | 6.2 s |
| Final drain after last request | 59 s | 55 s | 7.1 s | 48 s | 6.5 s |
| Recovery time | 7 s | 5 s | 7 s | – | 6 s[b] |
| Recovery-phase p95 latency | 63 ms | 55 ms | 34 ms | 19 ms | 19 ms |
| Service restarts | 0 | 0 | 0 | 0 | 0 |

**Table B.1.** – The same overload plan, one run each. Counts match JMeter, the Nginx log and the admission metric in every run. [a]The earlier, narrower measure that missed messages already delivered to the Worker; not comparable with the other two. The 22 October local run was re-extracted with the current extractor; the 22 October EC2 run could not be. [b]With the second-pass definition (p95 of accepted responses only, no 1 s gap in the window).

errors (p95 19 ms), and no container restarted. Every admission refusal came from the Outbox-backlog bound, including a few during the slow phases, so that threshold, like the others, must be set at the Week 13 pilot. This run used the code from before the review, and its raw JTL and samples were not copied back before the stack was destroyed, so it cannot be re-measured with the new definitions; its numbers describe the earlier code only.

On 24 October the same plan ran again on EC2 on the code after the review (`main-test-bug-fix` `45486aa`, in-flight bound 30 on a fresh database), and every raw file was copied back over SSM with its sha256 checked (`tests/evidence/20261024T104902Z-ec2-overload-*`). Of 4,069 order submissions, Nginx refused 2,445 with 429 and admission 1,042 with 503 (30 backlog, 1,012 in-flight); both counts matched JMeter exactly, and *every* one of the 3,487 refused keys, not a sample, was checked: none has an order row. All 582 accepted orders completed with exactly 582 units taken, the validator passed C3, no container restarted, the backlog after the overload drained in 6.2 s, the final drain took 6.5 s and recovery 6 s. The same session confirmed the three EC2 fixes of the review's second pass: the Worker's metrics answer, Prometheus scrapes all three services, and the queue policy and collector work through `docker exec` without the management port.

# C

# Pilot and Calibration on EC2

The pilot ran on the official deployment before the values were locked; the Experimental Design chapter summarises it (Section 9.1).

## C.1 Pilot on EC2

The pilot ran on the declared deployment (Section 8.9): one `m7i-flex.large` backend (2 vCPU) and a separate `c7i-flex.large` JMeter host in `ap-southeast-2`. The driver was `scripts/run-matrix.ps1` over SSM Run Command, with `workload.jmx` in open-loop mode, 60 s of steady load on one hot product and 100,000 units of stock. Before any number counted, the live check of `docs/deployment.md` (section 11a) passed: three runs, all five Prometheus targets up, numeric service metrics, and only port 80 reachable from the JMeter host. Every run in the pilot passed the correctness validator, and no container restarted (`tests/evidence/20261101T204940Z-ec2-pilot.log`).

Table C.1 lists every run with its error counters. Dead letters are counted once per message. The first report counted each one twice, because the Process Worker increments two metric families for one dead letter; `extract-run-metrics.ps1` now reads one family (commit `c6280c6`). Retries, dead letters, duplicates and reconciliations are internal recovery events, not lost orders: every accepted order finished and every validator passed.

Three things stood out. C1 and C2 both stopped near 180 accepted requests/s whatever the offered rate, with Order Service, PostgreSQL and RabbitMQ each near one full core of the two: the backend's CPU, not JMeter, set the ceiling (JMeter used 13–17 % CPU on average, and the C3 run reached 306.6/s because early refusals are cheap). The queued path finished work far more slowly than the API accepted it: C2 kept up at 50/s with no backlog, but at 100/s an order took more than a minute to complete. And the C3/C4 settings drained more slowly than C2, with dead letters and thousands of reconciliations, while extra Inventory replicas did not help.

**Table C.1.** – EC2 pilot, one run per row (60 s load). Drain is the time after the load until no order or Outbox row is unfinished. DL = dead-lettered messages. Sources: `tests/evidence/20261101T204940Z-ec2-pilot.log` and the per-run summaries in the pilot bundles.

| Run | Req./s | Ach./s | Accepted | Drain (s) | Retries | DL | Dupl. | Reconcil. |
|---|---|---|---|---|---|---|---|---|
| C1 | 100 | 100.5 | 6,024 | 0 | 0 | 0 | 0 | 0 |
| C1 | 200 | 186.9 | 11,246 | 0 | 0 | 0 | 0 | 0 |
| C1 | 400 | 180.4 | 11,017 | 0 | 0 | 0 | 0 | 0 |
| C2 | 100 | 94.9 | 5,693 | 110 | 0 | 0 | 9,168 | 2,851 |
| C2 | 200 | 157.0 | 9,457 | 166 | 0 | 0 | 3,258 | 2,015 |
| C2 | 400 | 177.9 | 10,843 | 674 | 0 | 0 | 28,363 | 9,383 |
| C3 | 100 | 94.0 | 5,592 | 360 | 629 | 28 | 10,067 | 2,210 |
| C3 | 200 | 177.4 | 6,270 | 326 | 666 | 52 | 17,401 | 4,624 |
| C3 | 400 | 306.6 | 4,432 | 137 | 344 | 0 | 12,042 | 3,008 |
| C4, 1 replica | 100 | 99.9 | 5,976 | 149 | 564 | 38 | 13,788 | 3,271 |
| C4, 1 replica | 200 | 179.6 | 7,140 | 164 | 771 | 20 | 11,209 | 2,298 |
| C4, 1 replica | 400 | 302.0 | 4,242 | 91 | 367 | 0 | 7,115 | 1,269 |
| C4, 2 replicas | 100 | 98.4 | 5,901 | 335 | 494 | 29 | 16,231 | 3,900 |
| C4, 2 replicas | 200 | 175.7 | 7,327 | 366 | 660 | 33 | 22,447 | 5,981 |
| C4, 2 replicas | 400 | 293.4 | 4,257 | 133 | 67 | 0 | 11,115 | 2,836 |
| C4, 4 replicas | 100 | 96.3 | 5,765 | 348 | 581 | 49 | 16,638 | 3,927 |
| C4, 4 replicas | 200 | 176.9 | 6,503 | 357 | 673 | 78 | 19,097 | 4,505 |
| C4, 4 replicas | 400 | 295.0 | 4,284 | 113 | 280 | 11 | 10,716 | 2,322 |
| C3, Outbox limit 500 | 200 | 160.9 | 1,084 | 9 | 28 | 0 | 1,117 | 580 |
| C3, Outbox limit 2000 | 200 | 147.0 | 2,960 | 67 | 281 | 1 | 5,414 | 1,118 |
| C3, Outbox limit 5000 | 200 | 137.5 | 4,649 | 356 | 395 | 5 | 6,846 | 1,341 |
| C3, Outbox limit 2000 | 400 | 170.0 | 2,043 | 32 | 39 | 0 | 2,605 | 508 |
| C2, Worker concurrency 8 | 200 | 114.7 | 6,908 | 167 | 0 | 0 | 1,772 | 1,603 |
| C2 | 25 | 25.4 | 1,519 | 0 | 0 | 0 | 173 | 0 |
| C2 | 50 | 50.7 | 3,031 | 0 | 0 | 0 | 305 | 0 |
| C4, 2 replicas | 50 | 49.6 | 2,974 | 303 | 351 | 6 | 2,053 | 26 |

## C.2 Why C3 and C4 drained slowly, and the fix

A local diagnosis isolated one variable at a time on a scratch Compose stack pinned to two CPU cores, 60 s per run, two repeats per point and 90 runs in three sets (`tests/evidence/20261103T150800Z-slowdown-diagnosis.log`). Local absolute numbers are not EC2 numbers; each comparison is made within one set. It found three causes that compound under load.

**Order Service applied results one message at a time.** None of Order Service's three consumers set the RabbitMQ client's dispatch concurrency, and its default is 1, so stock results were applied serially however many Inventory replicas fed them. At 100/s the time from the stock decision to the order update was 59–62 s with one handler, 8–14 s with four and 2 s with sixteen. Extra Inventory replicas only moved the queue downstream to this step.

**The bound and the Worker's retry ladder made dead letters.** When Order Service's queues filled to the C3 bound, RabbitMQ refused the Process Worker's publish (`reject-publish`). The Worker retried four times over about 7 s and then dead-lettered the message. The dead letters' headers say `rejected`, and the Worker log matched them one for one (72 of 72 in the recorded run). C2 has no bound and had none. No order was lost: reconciliation finished each one later.

**Reconciliation added load to a backlog.** Reconciliation republished every order waiting longer than 30 s, with no per-pass limit, which added work to the queues that were already behind. With it switched off, C2 duplicates at 100/s fell from 12,320 to 84 in one run.

Below capacity none of this mattered: at 25/s every configuration drained in 2–3 s with no dead letters.

**The fix.** Order Service and Inventory gained a consumer concurrency setting (default 1, unchanged behaviour), and all five consumers now serialise their acknowledgements and requeue publishes, because the client does not allow concurrent use of one channel for those operations. The consumer verifiers pass at concurrency 1 and 4, and the unit tests give the same result as before (`tests/evidence/20261103T235000Z-consumer-concurrency/summary.log`, commit `54548db`). Locally, Order Service concurrency 4 with reconciliation at 120 s drained the all-limits C4 run in 98 s in both repeats, with no dead letters and no reconciliation, against 363 and 245 s without the fix.

**Table C.2.** – EC2 confirmation, repeat 1 / repeat 2. Current: Order Service consumer concurrency 1, reconciliation 30 s, Worker 32. Fixed: 4, 120 s, 20. C4 uses 2 Inventory replicas, the queue bound 1000 and the C3 limits. E2E = accepted to completed. DL = dead-lettered messages.

| Setting | Run | Drain (s) | E2E p95 (s) | Retries | DL | Duplicates | Reconcil. |
|---|---|---|---|---|---|---|---|
| Current | C2, 50/s | 0 / 0 | 11.6 / 7.6 | 0 / 0 | 0 / 0 | 25 / 279 | 0 / 0 |
| Current | C2, 100/s | 85 / 57 | 74.5 / 77.1 | 0 / 0 | 0 / 0 | 7,531 / 4,382 | 2,497 / 1,440 |
| Current | C4, 50/s | 0 / 0 | 18.9 / 20.8 | 0 / 0 | 0 / 0 | 53 / 56 | 0 / 0 |
| Current | C4, 100/s | 111 / 312 | 99.7 / 92.6 | 528 / 416 | 22 / 22 | 12,203 / 13,803 | 2,854 / 3,479 |
| Fixed | C2, 50/s | 0 / 0 | 5.3 / 5.3 | 0 / 0 | 0 / 0 | 181 / 130 | 0 / 0 |
| Fixed | C2, 100/s | 24 / 17 | 46.4 / 43.1 | 0 / 0 | 0 / 0 | 123 / 12 | 0 / 0 |
| Fixed | C4, 50/s | 0 / 0 | 10.8 / 15.0 | 0 / 0 | 0 / 0 | 41 / 26 | 0 / 0 |
| Fixed | C4, 100/s | 44 / 292 | 56.6 / 58.4 | 337 / 357 | 0 / 2 | 3,217 / 3,074 | 0 / 0 |

## C.3 EC2 confirmation of the fix

Table C.2 compares the settings before and after the fix on EC2, on commit `54548db`, two repeats per cell. Every run passed the validator, and each run read its settings back from the running containers (`summary.log` in `tests/evidence/20261104T132500Z-ec2-confirmation/`).

The fix holds on EC2. Reconciliation fell from 1,440–3,479 per run at 100/s to none, duplicates fell by 75–99 %, and the end-to-end p95 at 100/s fell by about 40 %. Dead letters on C4 at 100/s fell from 22 per run to 0 and 2. The fixed run that drained in 292 s is the one with those 2 dead letters: a dead-lettered order finishes only through reconciliation, which now waits 120 s, so the drain waits for it. Its end-to-end p95 was still 58 s.

## C.4 Pilot results

These are pilot data, superseded by the official results (Chapter 10). This section holds the 18 runs of the EC2 pilot (one run per cell, Section C.1) and points to the EC2 confirmation of the fix (Section C.3). The pilot ran *before* the fix and with the pilot's settings, not the values locked for Week 14 (Section 9.2), so its numbers show the shape of each configuration, not the final result. The official tables below are filled from the Week 14 runs, three repeats per cell, with the locked values. Every pilot number comes from `tests/evidence/20261101T204940Z-ec2-pilot.log` and the run bundles next to it.

**What the pilot shows, before the fix.** No configuration oversold or lost an order (Table C.3). C1 and C2 both stop near 180 accepted requests/s whatever is offered (Table C.4). By then Order Service alone uses about a full core or more of the two (93–144 % at 200 and 400/s, Table C.5), so the 2-vCPU host is the ceiling.

**Table C.3.** – Pilot data, not final: correctness by configuration, Week 13 EC2 pilot, one run per cell. "Oversold" and "lost" come from the validator's checks (Section 8.4); every run passed.

| Config | Runs | Validator pass | Accepted | Oversold | Lost | Validator checks |
|---|---|---|---|---|---|---|
| C1 | 3 | 3 of 3 | 28,287 | 0 | 0 | 1–3 and 6 (4 n/a) |
| C2 | 3 | 3 of 3 | 25,993 | 0 | 0 | 1–6 |
| C3 | 3 | 3 of 3 | 16,294 | 0 | 0 | 1–5 |
| C4 | 9 | 9 of 9 | 51,395 | 0 | 0 | 1–5 |

**Table C.4.** – Pilot data, not final: throughput and latency per run, Week 13 EC2 pilot, 60 s open-loop load, one run per row, before the fix. HTTP is the client latency of 2xx submissions (ms); E2E is accepted to completed (s). C1 is synchronous and has no E2E stage. Percentiles are nearest-rank.

| | | | | | HTTP (ms) | | | E2E (s) | |
|---|---|---|---|---|---|---|---|---|---|
| Run | Req./s | Ach./s | Accepted | 429/503 | p50 | p95 | p99 | p50 | p95 |
| C1 | 100 | 100.5 | 6,024 | 0 / 0 | 13 | 163 | 718 | – | – |
| C1 | 200 | 186.9 | 11,246 | 0 / 0 | 507 | 1,535 | 2,181 | – | – |
| C1 | 400 | 180.4 | 11,017 | 0 / 0 | 2,134 | 3,216 | 3,759 | – | – |
| C2 | 100 | 94.9 | 5,693 | 0 / 0 | 578 | 1,424 | 1,761 | 79.3 | 88.8 |
| C2 | 200 | 157.0 | 9,457 | 0 / 0 | 1,248 | 1,687 | 1,851 | 164.2 | 175.3 |
| C2 | 400 | 177.9 | 10,843 | 0 / 0 | 2,203 | 2,998 | 3,347 | 170.6 | 208.4 |
| C3 | 100 | 94.0 | 5,592 | 0 / 44 | 540 | 1,486 | 1,844 | 105.3 | 120.2 |
| C3 | 200 | 177.4 | 6,270 | 0 / 4,389 | 1,116 | 1,708 | 1,899 | 110.0 | 149.9 |
| C3 | 400 | 306.6 | 4,432 | 6,646 / 7,738 | 1,713 | 3,012 | 3,319 | 89.3 | 111.1 |
| C4, 1 repl. | 100 | 99.9 | 5,976 | 0 / 0 | 407 | 1,085 | 1,342 | 87.3 | 121.8 |
| C4, 1 repl. | 200 | 179.6 | 7,140 | 0 / 3,670 | 928 | 1,764 | 2,038 | 150.5 | 174.5 |
| C4, 1 repl. | 400 | 302.0 | 4,242 | 6,303 / 7,926 | 1,914 | 3,013 | 3,270 | 92.2 | 103.2 |
| C4, 2 repl. | 100 | 98.4 | 5,901 | 0 / 4 | 349 | 1,154 | 1,611 | 86.9 | 123.7 |
| C4, 2 repl. | 200 | 175.7 | 7,327 | 5 / 3,246 | 903 | 1,783 | 2,129 | 137.7 | 176.6 |
| C4, 2 repl. | 400 | 293.4 | 4,257 | 5,760 / 7,927 | 1,816 | 3,143 | 3,500 | 81.1 | 101.4 |
| C4, 4 repl. | 100 | 96.3 | 5,765 | 0 / 0 | 476 | 1,396 | 1,783 | 101.8 | 140.5 |
| C4, 4 repl. | 200 | 176.9 | 6,503 | 0 / 4,143 | 1,064 | 1,762 | 2,013 | 124.4 | 168.3 |
| C4, 4 repl. | 400 | 295.0 | 4,284 | 5,881 / 7,926 | 1,848 | 3,148 | 3,344 | 94.1 | 113.1 |

**Table C.5.** – Pilot data, not final: peak container CPU (% of one core) during each run's load and drain, from `docker stats` every 5 s. Inventory sums its replicas. The backend has 2 vCPU, so 200 % is the whole host.

| Run | Req./s | Order | Inventory | Worker | PostgreSQL | RabbitMQ | Redis |
|---|---|---|---|---|---|---|---|
| C1 | 100 | 100 | 1 | 1 | 21 | 114 | 3 |
| C1 | 200 | 112 | 0 | 0 | 58 | 56 | 0 |
| C1 | 400 | 108 | 1 | 1 | 53 | 44 | 3 |
| C2 | 100 | 96 | 35 | 20 | 60 | 76 | 4 |
| C2 | 200 | 133 | 30 | 22 | 57 | 84 | 4 |
| C2 | 400 | 143 | 32 | 22 | 52 | 94 | 7 |
| C3 | 100 | 134 | 35 | 22 | 65 | 133 | 6 |
| C3 | 200 | 115 | 35 | 22 | 43 | 77 | 4 |
| C3 | 400 | 133 | 35 | 22 | 43 | 85 | 6 |
| C4, 1 repl. | 100 | 91 | 38 | 22 | 39 | 75 | 4 |
| C4, 1 repl. | 200 | 122 | 35 | 20 | 63 | 86 | 6 |
| C4, 1 repl. | 400 | 124 | 37 | 22 | 48 | 76 | 4 |
| C4, 2 repl. | 100 | 90 | 53 | 22 | 42 | 106 | 6 |
| C4, 2 repl. | 200 | 130 | 59 | 21 | 51 | 82 | 7 |
| C4, 2 repl. | 400 | 141 | 56 | 21 | 52 | 69 | 5 |
| C4, 4 repl. | 100 | 95 | 89 | 23 | 42 | 125 | 7 |
| C4, 4 repl. | 200 | 93 | 77 | 20 | 43 | 76 | 3 |
| C4, 4 repl. | 400 | 144 | 75 | 21 | 40 | 74 | 4 |

C1 answers fastest at 100/s because it does all its work in the request, while the asynchronous configurations accept quickly and finish later: their end-to-end time grows to minutes once the offered rate passes what the queued path can finish. C3 and C4 refuse most of a 400/s load early (429 and 503) and stay correct. Extra Inventory replicas change none of this, for the reason found in Section C.2.

**After the fix.** Table C.2 is the pilot-scale comparison on EC2 with the fix: two repeats per cell, C2 and C4 at 50 and 100/s. At 100/s the end-to-end p95 falls by about 40 %, reconciliation falls to none and duplicates by 75–99 %. These are still pilot numbers; the official comparison of C1 to C4 at the locked values follows below.

## C.5 Supplementary runs: host comparison

The supplementary session (Section 10.9) repeated one official cell, C2 at 100/s with 100,000 units, to compare the two host pairs (Table C.6). On the second pair:

- the achieved rate was about 5 % lower (95.1 against 100.6 a second);
- the API p95 was nearly twice as long (1.4 against 0.74 s);
- 14.0 orders a second completed during the load against 23.5;
- the completion p95 was 58 against 48 s, and the drain 46 against 32 s.

The host CPU was saturated on both days. Every difference is larger than the run-to-run range of either day, so the second pair was slower. Its numbers are therefore reported on their own and never combined with the official cells, and the comparisons in Section 10.9 are made within the supplementary runs only.

| C2 at 100/s | 5 November (official) | 6 November (supplementary) |
|---|---|---|
| Achieved rate (/s) | 100.6 (100.5–101.3) | 95.1 (91.9–96.0) |
| Done/s in load | 23.5 (22.1–28.1) | 14.0 (13.1–17.2) |
| API p95 (ms) | 739 (672–897) | 1,400 (1,353–1,574) |
| Completion p95 (s) | 47.9 (47.7–48.2) | 58.1 (55.1–61.7) |
| Drain (s) | 32 (31–38) | 46 (46–50) |
| Host CPU in load (%) | 99 (98–99) | 99 (97–99) |

**Table C.6.** – The same cell (C2, 100/s, 100,000 units, three runs each) on the official host pair (5 November) and the supplementary one (6 November). Cells: median of 3 runs (range).

# D

# External Review

An external review graded the work up to the deployment strictly. Every finding below was confirmed in the code or the saved data before it was fixed, and each fix has a test that fails when the fix is removed.

- **State regression.** The start and completion consumers use separate database contexts, so a late "processing started" event could write `Processing` over a `Completed` order. The order's state is now an optimistic-concurrency token: the late write matches no row, and the event is decided again from a fresh read and acknowledged as stale. A unit test runs the completion between the start event's read and its save, both with Entity Framework's exception and with the one ABP raises.

- **Hidden backlog and the in-flight bound.** No consumer limited its unacknowledged messages, so the queue bound did not cover the Worker's backlog, and the backlog measure missed it. Every consumer now has a prefetch of 20 (peak unacknowledged 252 before, 20 after), the measure counts all queued work, and the in-flight bound keeps the backlog small (Table B.1).

- **Measurement.** The extractor now selects a run's orders by their own Idempotency-Keys (773, where the time window found 771), keeps one interval row per order when reconciliation re-publishes, stops on any SQL error instead of reading it as 0, and counts recovery only in windows without refusals and with accepted throughput. Publish times are taken when a message is sent, which removed the negative publish-to-decision intervals. Negative controls ran the previous extractor on the same inputs (`tests/evidence/20261023T123738Z-extract-negative-controls.log`).

- **Throughput limits.** Each Outbox publisher slept 2 s after every batch of 50, capping it below 25 events/s, and opened a channel, checked the routing and saved the row once per message. It now starts the next full batch at once and sends a batch on one channel, checking the routing once per event type and awaiting the confirms together; each message still needs its own confirm. 300 queued rows drained in 1.3 s (at least 230 events/s); the old loop needed at least 10 s, and the per-message channel alone 8.1 s.

The Process Worker handled one order at a time (about 3.7 orders/s); `Processing:MaxConcurrency` now lets several orders wait out the delay together. Its default stays 1, so earlier results keep their meaning, and a higher value is an experiment parameter.

- **Reconciliation** also recovers orders stuck in `Confirmed` or `Processing` (Section 8.6.3; the failure model is in Section 7.9).
- **Wording.** Order submissions are reported apart from status polls; the report no longer says a retry is never refused (Nginx can answer 429 first), that every consumer has an Inbox (the stateless Worker relies on Order Service's), or that the validator cannot report a false pass.

**Second pass.** The same review was then checked again finding by finding (`docs/midterm-review-disposition.md`):

- Both Outbox publishers claim their batch with `FOR UPDATE SKIP LOCKED` inside a transaction. Before, every Inventory replica read the same oldest rows and published them: with two replicas the broker received 800 messages for 400 rows. Now 2 or 4 replicas publish each row exactly once (TP-L05, `scripts/verify-replicas.ps1`), so C4 measures scaling rather than duplication.
- The state race is also tested on PostgreSQL, with two connections held at a barrier: both save orders, duplicate starts and conflicting stock results. Four of the six cases fail when the concurrency token is removed.
- A crash between the Redis reservation and the PostgreSQL save is now injected (TP-M01 case 1b). The restarted consumer gets `DUPLICATE` and writes the missing result with no second deduction; a control that erases Redis's record of the order deducts twice and fails.
- On EC2 the Worker listened only on its own loopback (its `Urls` setting overrode the container's), so its metrics were never scraped there; the Compose file now overrides it. The queue policy and the collector work through `docker exec` with no published management port and no password on the command line. All three were checked on EC2 on 24 October (Section 8.9).
- The extractor judges recovery latency on accepted responses only, needs submissions in every second of the window, never reads a missing backlog series as 0, and exits 2 with every database-derived value `unavailable` when a query fails after the first probe.

- Verifiers that switch reconciliation off now use `Reconciliation:Enabled`; the earlier one-hour timeout still re-sent orders left over from earlier runs in the shared test database.

**First local pilot.** C1 and C2 were offered the same steady load on the development PC, one after the other on the same processes, with no load-shedding limit and the Worker running 32 orders at a time (`scripts/run-pilot-c1-c2.ps1`; raw data `tests/evidence/20261024T112852Z-pilot-c1-c2-50rps-*` and `tests/evidence/20261024T113202Z-pilot-c1-c2-200rps-*`). The validator passed all four runs. At 50 requests/s both kept up: C1 answered in 17/84 ms (p50/p95) with the decision, C2 accepted in 25/43 ms and Inventory decided about 1.8 s later. At 200 requests/s C1 still decided about 161 orders/s but answered in about 1.1 s (JMeter's threads then offered it only 160/s), while C2 accepted all 202/s in under 61 ms (p95) but its one Inventory consumer, which handles one message at a time, decided only about 71/s, so decisions fell a minute behind. This single-machine, one-run result is preliminary; it names the bottleneck that C4 and the Week 13 EC2 pilot must measure.

Still open: every limit is a pre-pilot value that the Week 13 pilot fixes, and each overload number is a single run. The 22 October EC2 run's raw data remains lost; the 24 October run on the reviewed code replaces it.

# E

# Additional Result Figures

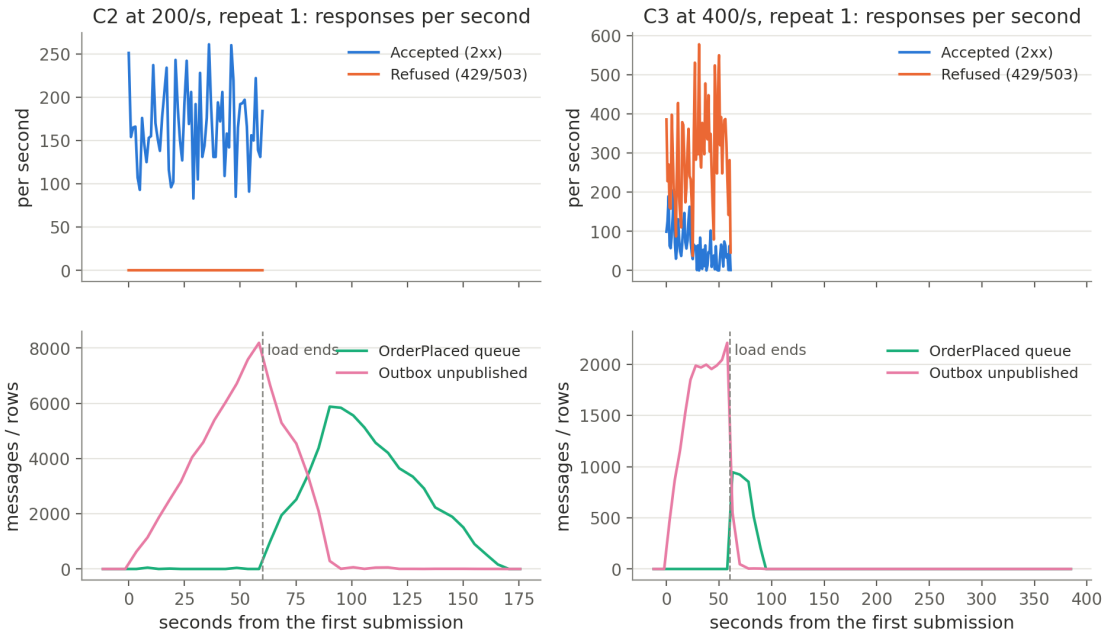



**Figure E.1.** – One run over time: C2 at 200/s (left) and C3 at 400/s (right), repeat 1. Top: accepted and refused responses per second, from the JTL. Bottom: the `OrderPlaced` queue and the unpublished Outbox rows, from the collector's 5 s samples. Without load shedding the Outbox grows through the whole load and the queue fills after it; with the C3 limits most requests are refused early and both backlogs stay bounded.

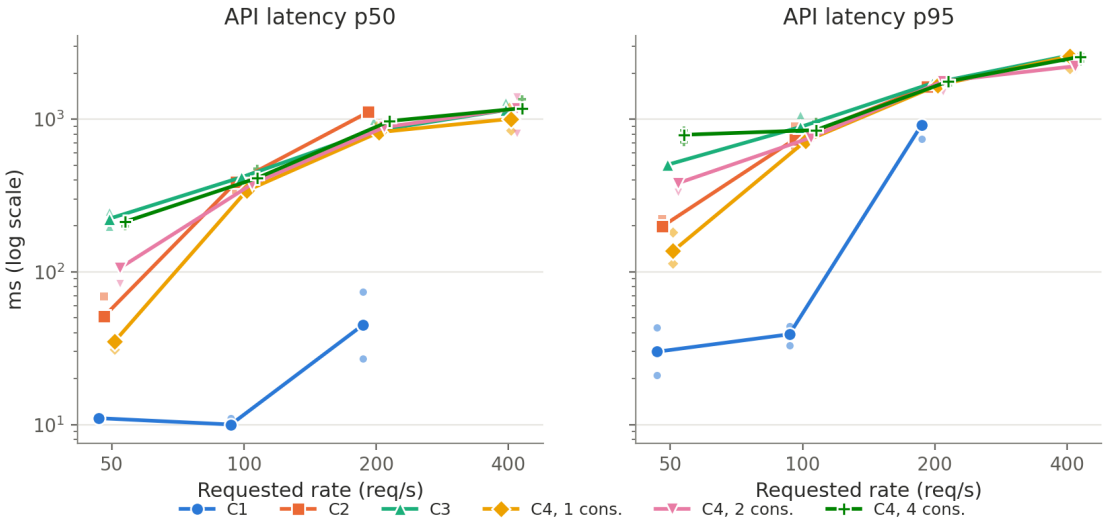



**Figure E.2.** – API latency p50 and p95 per configuration and requested rate (log scale). Each run is a small point and the median of the 3 runs is joined by a line, so the spread between runs stays visible.

# F

# Freeze Manifest

The official runs use the values fixed in `docs/week14-freeze.md`, which also records the frozen source commit and the SHA-256 hash of each Terraform file. `scripts/verify-freeze.ps1` checks every value against its source file (TP-X09, `tests/evidence/20261105T100509Z-freeze.log`). The manifest was frozen again on 5 November at the commit that adds check 7 to the validator and sums the extractor's gauges across replicas, with no change to the services, the infrastructure or any value below. Table F.1 repeats the values that define the experiment; Section 9.2 explains how they were chosen.

| Item | Value |
|---|---|
| Backend host | EC2 `m7i-flex.large` (2 vCPU), `ap-southeast-2a` |
| JMeter host | EC2 `c7i-flex.large`, same subnet |
| Operating system | latest Amazon Linux 2023 at apply time (not pinned) |
| Terraform, AWS provider | Terraform $\geq$ 1.9.0; `hashicorp/aws` 5.100.0 |
| .NET | SDK 10.0.300; runtime image `aspnet:10.0.8` |
| Infrastructure images | `postgres:16.14`, `redis:7.4.7`, `rabbitmq:3.13.7-management`, `nginx:1.31.3` |
| JMeter | 5.6.3, `tests/jmeter/workload.jmx` in open-loop mode |
| Configurations | C1, C2, C3, C4; C4 at 1, 2 and 4 Inventory replicas |
| Load levels | 50, 100 and 200/s for all; 400/s for C3 and C4 |
| Run length, repeats | 60 s of load, 3 repeats per cell |
| Product and stock | one hot product, 100,000 units, reset, seeded and warmed up before every run |
| Random seeds | none: every key is a fresh UUID, pacing is deterministic |
| Process Worker | 200 ms per order, concurrency 20, prefetch 20 |
| Gateway limit (C3, C4) | 200 requests/s, burst 100 |
| Admission | 64 concurrent new orders; Outbox backlog 2000 |
| Queue bound (C3, C4) | 1000 messages, `reject-publish` |
| Consumer concurrency | Order Service 4; Inventory Service 1 |
| Retries | 4 attempts at 1, 2 and 4 s; delayed requeue 2, 4 and 8 s |
| Reconciliation | stuck after 120 s, polled every 30 s, 3 attempts |
| PostgreSQL connections | 200 |

**Table F.1.** – The main frozen values. The complete list, with the source file of each value and the metric definitions, is `docs/week14-freeze.md`.

# G

# Run Commands

All commands run from the repository root in Windows PowerShell 5.1. The prerequisites and the full procedure are in `docs/reproduction.md` (local) and `docs/deployment.md` (EC2).

**Build and unit tests.**

```
dotnet build src/FlashSale.OrderService.slnx --no-incremental
dotnet test tests/FlashSale.OrderService.Tests
```

**Verifier database and one verifier.** Each verifier prints `PASS` or `FAIL` lines and exits 1 on any failure.

```
powershell -File .\scripts\verify-environment.ps1 -Mode Fresh -Keep
powershell -File .\scripts\verify-delivery.ps1 -Container verify-env-pg -DbPort
↪  55432
```

**Freeze check.**

```
powershell -File .\scripts\verify-freeze.ps1
```

**EC2 hosts (owner only; creates paid resources).**

```
cd infra/terraform
terraform init
terraform apply "-var-file=terraform.tfvars"
terraform destroy "-var-file=terraform.tfvars"
```

**The official matrix.** Run from the PC; it drives both hosts over AWS Systems Manager Run Command and writes one `manifest.json` per run. The 400/s cells are a second call with `-Configs C3,C4 -Rates 400`. The official runs used one call per run, in repeat-major order, as described in `docs/week14-official-runs.md`; the owner's AWS steps are `docs/week14-manual-steps.md`.

```
powershell -File .\scripts\run-matrix.ps1 -Transport Ssm -BackendInstance
↪  <backend-id> -JMeterInstance <jmeter-id> -BackendHost <backend-private-ip>
↪  -OutDir <local-folder>
```

**Correctness of one run.** `run-matrix.ps1` calls this after every run. By hand it checks the local Compose stack; the container names are parameters.

```
powershell -File .\scripts\validate-correctness.ps1 -Config C2 -ProductId
↪  flash-product-1 -InitialStock 100000
```

**Report.**

```
cd report
latexmk -pdf -interaction=nonstopmode -halt-on-error report.tex
```

# H

# Evidence Index

Every saved result is in `tests/evidence/`. The Week 3 baseline results are in `tests/baseline/results/` and `tests/jmeter/results/`. File names start with the UTC time of the run, for example `20261104T145044Z-freeze.log`, so a later run never overwrites an earlier one. `docs/evidence-index.md` maps every requirement of the brief to its test cases, their status and their logs. Table H.1 lists the evidence behind the experiment chapters.

| Claim | Case | Evidence in `tests/evidence/` |
|---|---|---|
| Pilot of C1 to C4 on EC2 | TP-X01 | `20261101T204940Z-ec2-pilot.log`, `-ec2-pilot-results.csv` |
| Slowdown cause | — | `20261103T150800Z-slowdown-diagnosis.log` |
| Consumer concurrency is safe | TP-X08 | `20261103T235000Z-consumer-concurrency/` |
| EC2 confirmation of the fix | TP-X07 | `20261104T132500Z-ec2-confirmation/` |
| Workload profiles | TP-X04 | `20261031T161516Z-ec2-stack.log` |
| Open-loop load mode | TP-X05 | `20261031T171915Z-ec2-stack.log` |
| Matrix runner and queue-bound gate | TP-X06 | `20261101T181846Z-ec2-stack-matrix.log` |
| Freeze manifest matches the repository (first freeze) | TP-X09 | `20261104T145044Z-freeze.log`, `-freeze-negative.log` |
| Re-freeze at 9d00bea | TP-X09 | `20261105T100509Z-freeze.log`, `-freeze-negative.log` |
| Validator run filter (check 0b) | TP-X10 | `20261105T070413Z-validator-run-filter.log` |
| Status history (check 7), missing parameters | TP-X11 | `20261105T064537Z-validator.log`, `-validator-negative.log` |
| Extractor sums gauges across replicas | TP-X12 | `20261105T095414Z-extract.log`, `20261105T074539Z-extract-negative.log` |
| Official runs: 66 of 66 pass | TP-X02 | `20261105T104832Z-official/` (bundles, manifests, `summary.log`) |
| README reproduction from a GitHub clone | TP-X03 | `20261106T074827Z-reproduction/` (`summary.log`) |
| Supplementary EC2 runs (not pooled) | TP-X13 | `20261106T135523Z-supplementary/` (`summary.log`) |

**Table H.1.** – Evidence for the Experimental Design and Results chapters. The official runs folder holds every run's manifest, raw JTL, collector samples, validator log and extraction; the database dumps stayed on the backend because each run was extracted before the next reset.